JULY

Building No-Battery Set—Page 55

N.S.E.
25 CENTS

POPULAR MECHANICS MAGAZINE

WRITTEN SO YOU CAN UN

REG'D. TRADE MARK GREAT BRITAIN, No. 410425
REG. U.S. PAT. OFF.

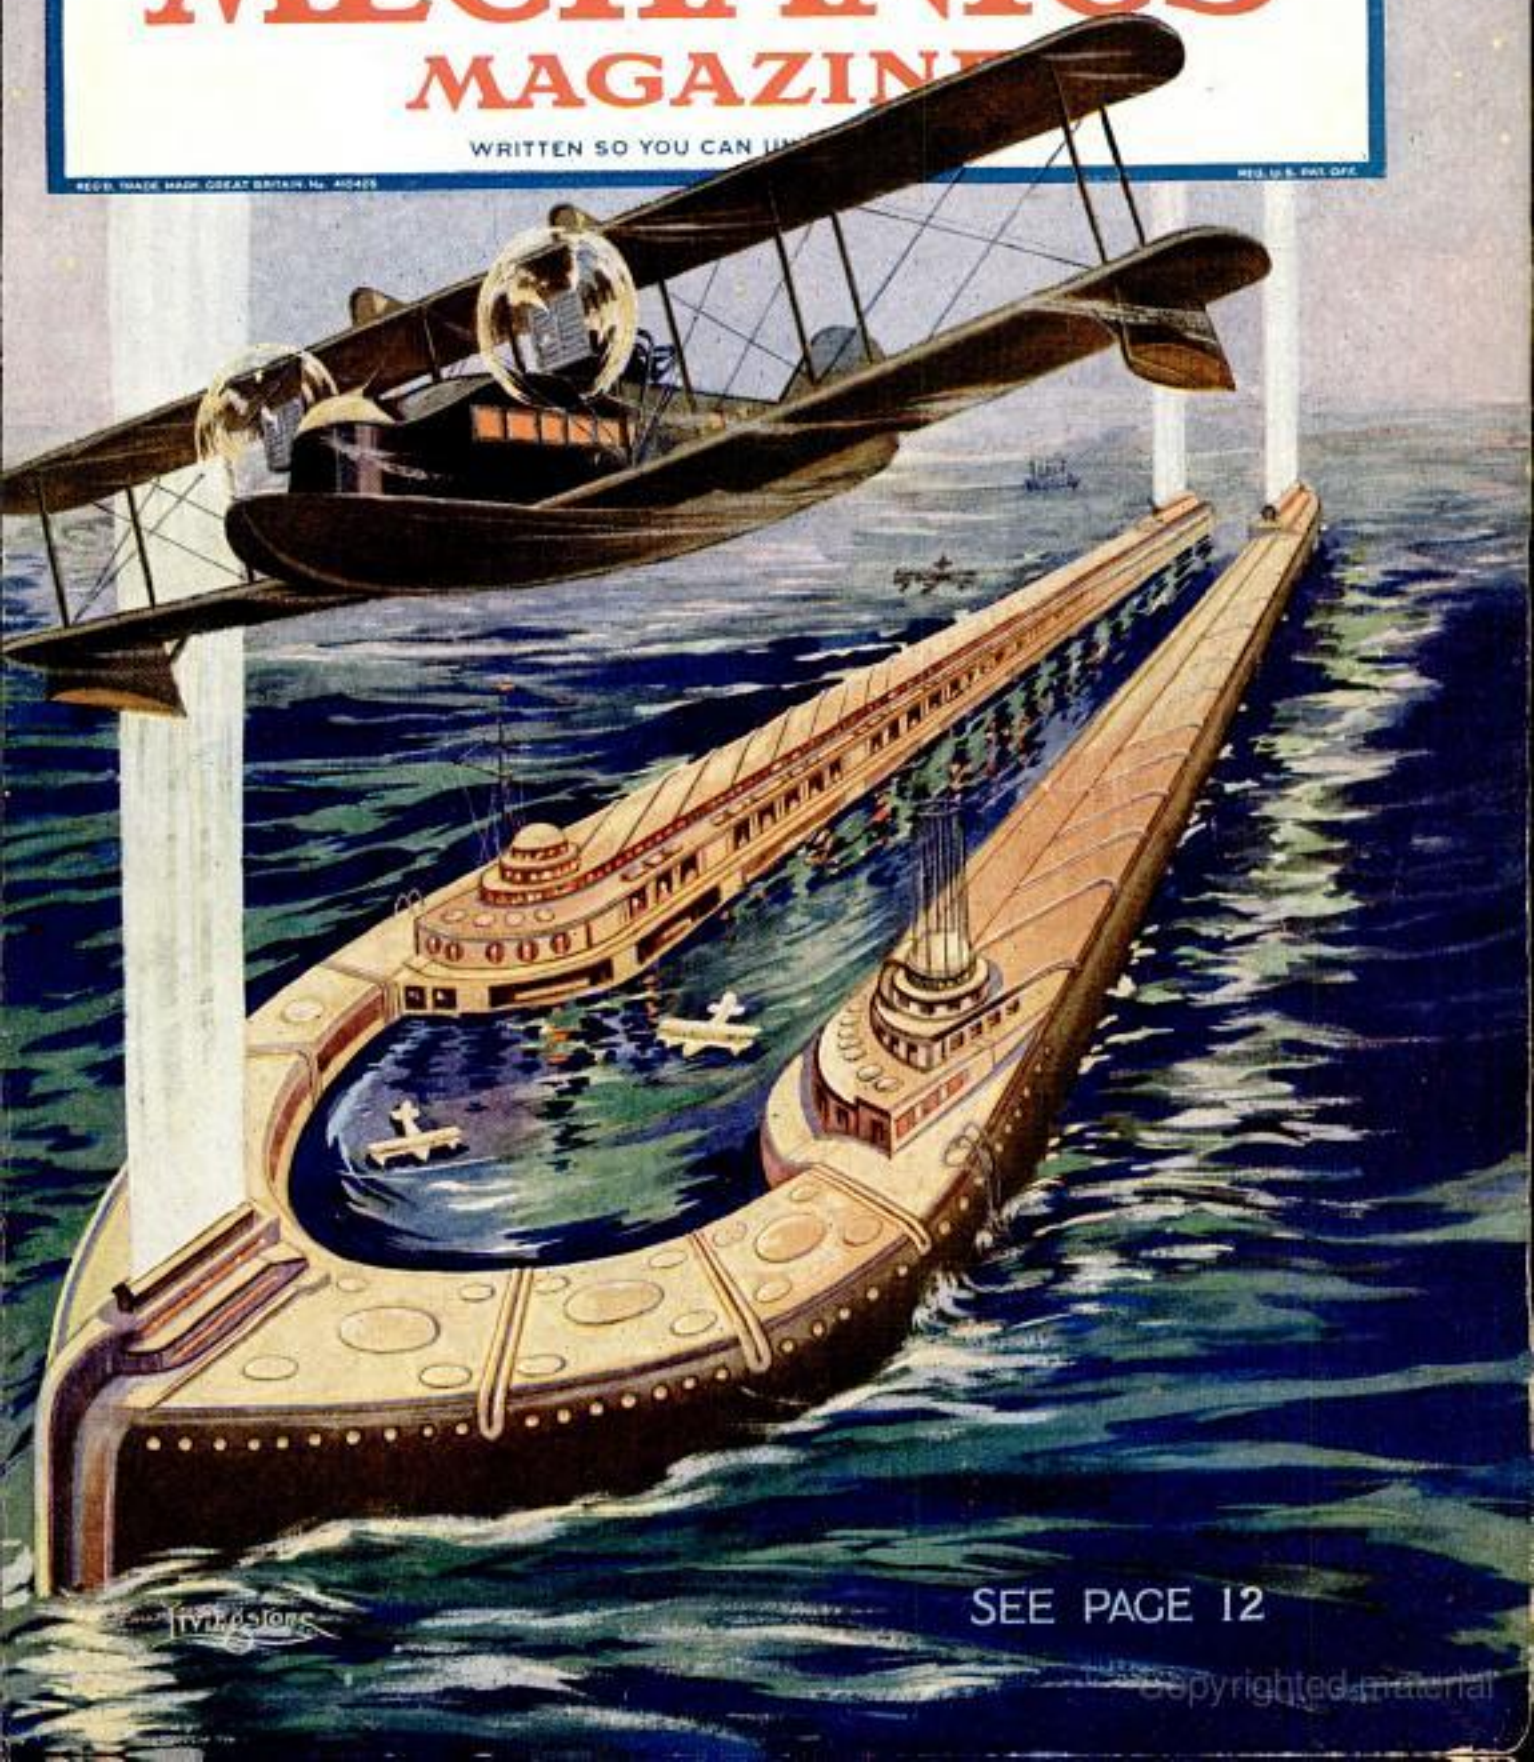

SEE PAGE 12

Copyrighted material

McSweeny will pull you out of the Ruck and help you make BIG MONEY

J. H. McSweeny "MAC"

You can earn $100 a week

You'd like to earn $100 or more a week—or be your own boss—wouldn't you? You can. You can be independent. All that I ask you to do now is simply to spend 2 cents—one postage stamp—and let me prove to you that this is *your opportunity.*

Success Follows McSweeny Training

This is a special message to red-blooded, two-fisted fellows who know they've got the stuff in them. You know what I mean. You're not satisfied. You see others around you making big money. You've got your eye open for the big chance. *This is it.* Listen to what George Smith of West Alexandria, Ohio, did. He was getting only $75 a month.

"Dear Mac:

"I am certainly grateful to you for the success I've had. If it hadn't been for you and your training, I'd still be plugging along on the farm. Now I can laugh at those fellows who told me I was foolish to quit the farm. *I am clearing $800.00 a month.* I'll tell the world McSweeny training put me over."

I can show you hundreds of just as enthusiastic letters from men who had been clerks, mechanics, farm boys, shop workers, of all ages—16 to 65.

Thousands of McSweeny-Trained Men Wanted

Automobiles are increasing at the rate of three million a year. The need for auto experts never was so great. Not just mechanics, but experts, skilled in auto electricity, starting and lighting, ignition, batteries, and all kinds of automobile repairing and trouble shooting—experts, with ability to direct men and operate a garage business profitably.

Complete Training in Only Eight Weeks

The automobile industry everywhere is eagerly seeking McSweeny trained men. McSweeny men have shown that they know their stuff. Many own their own garages now. You can get this complete training—*the start to success*—in only 8 weeks. It isn't book training—it's actual job work in McSweeny's big graduate shops. The instructors are all specialists—the pick of the industry. Equipment is modern and complete—autos, trucks, tractors, and stationary engines.

Shop Work—Not Book Work

McSweeny originated the graduate shop plan. The three big McSweeny schools in Cincinnati, Cleveland and Chicago are known from coast to coast. Start your success today. Let me show you how easy it really is. If you are interested in making big money, you'll send in the coupon now. Mail it to the nearest McSweeny Shop. This is the most liberal offer I have ever made. Tell your friends about it. Send the coupon now.

SEND FOR FREE BOOK

MAIL THIS COUPON TODAY

J. H. McSweeny, President, Dept. 140, McSweeny Automotive and Electrical Training Shops, 9th and Walnut Streets, CINCINNATI, O.
517-521 South Laflin Street, CHICAGO, ILL.
1815 E. 24th St., Cleveland, O.

Dear "Mac:" Send me full details on your Special Summer Offer.

Name.....

Address.....

Read this amazing Summer offer

I'll give you **FREE** *Railroad Fare*

FREE *Board*

FREE

Kit of Tools

A BIG SURPRISE ?

The Special Summer Offer **WRITE TODAY** *and I'll tell you all about it*

act now

McSWEENY AUTO and TRACTOR GRADUATE SHOPS

CINCINNATI
CLEVELAND
CHICAGO

THREE BIG SHOPS—*Write to the nearest one*

Copyrighted material

WD-11
WD-12
UV-199
UV-200
UV-201-a

Radiotrons with these model numbers are only genuine when they bear the name Radiotron and the RCA mark.

Do you believe in Names?

Do you buy things by name because the name tells the quality? Do you ask for a RADIOTRON, instead of just a "vacuum tube"—demand the standard by the name that marks it as genuine?

The most important part of a radio set is the tube, and you can't get the best out of any set without putting the best tubes into it. There's a Radiotron for every use, in every kind of set. Look for the name—and the RCA mark—and be sure it is *genuine*.

Radio Corporation of America

Sales Offices: Suite No. 517
233 Broadway, New York — 10 So. La Salle St., Chicago, Ill.
28 Geary Street, San Francisco, Cal.

Radiotron

REG. U.S. PAT. OFF.

PRODUCED ONLY BY RCA

RCA

2BH6-9A0-KQSZ

60 MILES ON A GALLON OF GASOLINE

TESTS SHOW FORD CAN RUN 60 MILES ON A GALLON

The amazing fact that a Ford can run 60 miles on 1 gallon of gasoline was recently brought to light through tests conducted by America's foremost engineers, where it was shown that a gallon of gasoline contains sufficient heat units which if properly atomized and mixed with air would give this additional mileage. Great strides have already been made in this direction by the recent invention of a simple attachment which can be installed in a few minutes without any alterations to the motor. It is common for Ford Owners to make from 40 to 44 miles per gallon after this marvelous device is attached.

MOST WONDERFUL INVENTION TODAY BRINGS JOY TO FORD OWNERS

Starts Ford Instantly

Starting a Ford Car in cold or zero weather is something every Ford Owner dreads—everybody realizes that difficult starting is an abuse on the starter and battery. Thousands of Ford Cars are "laid up" during the Winter just for these reasons. This great difficulty has been overcome. "The SUPER positively starts a Ford Car instantly in the coldest weather."

Marvelous Device

The SUPER is no trick affair—requires no mechanical adjustments and contains all the scientific principles of carburetors costing $20 to $35 and in its natural action uses up every particle of unused gasoline and breaks it up into a perfect vapor. The hitherto impossible is now realized by the SUPER.

The Heart of the Motor

Eliminates Oil Pumping in Front Cylinder

What a wonderful relief to Mr. Ford Owner when he realizes that he can run his car without the motor pumping oil in the front cylinder. Sounds like an awful lot to expect of any device, but that is what the SUPER does and this is only one of its many advantages because it puts real efficiency into any Ford Car.

Complete Combustion

The SUPER is so designed that it takes advantage of the present Ford Carburetor and properly atomizes the light as well as the heavy elements of the fuel, converting every atom of gasoline and kerosene into power preventing liquid fuel from passing into the cylinders, thus avoiding carbon formation and oil dilution.

Everybody Satisfied

Saves 3 to 7 Dollars Per Month

The best investment I ever made. The SUPER is saving me from three to seven dollars each month, besides putting new life into my motor.
A. H. WORRA, Iowa.

Makes 44 Miles Per Gallon

I have tried the SUPER and the results of the experiment are satisfactory. One quart of gasoline run my Ford 11 miles over improved roads which is just about again as far as I could run with the plain Ford Carburetor. G. E. YODER, Penn.

Finds That Our Claims Are Correct

I find that your claims for increased mileage are correct and that a big saving is made by your SUPER, in fact, the best device I have met with in that line. M. J. VAN LEEUWEN, Mass.

Easy to Sell

Sells Like Hot Cakes

This is a recent letter from one of our distributors: "Enclosed find draft for 200 more SUPERS, rush as I need them badly. I sold and banked $104.00 in one day. Hope to sell 1000 SUPERS next month." A. W. LEONARD, Penn.

Making Big Profits Every Noon

I have been working the SUPER at noon only. Yesterday noon I made more money with the SUPER than I did at my 11 hours' hard work in the factory all day. J. L. LEHNER, Wis.

Had No Previous Selling Experience

This letter shows what ambition does: "I sold six SUPERS in less than 2 hours tonight. I think it's a pretty good start—for it's the first thing I ever sold."
E. MANGOLD, Ind.

$60.00 TO $150.00 PER WEEK EASY

You just can't help making Big Money selling the SUPER because a trial sells itself and soon everyone in the neighborhood get talking about this marvelous device. Men like Leonard, Shaw, Manner, Kinsley, Peters, Sands, Beck and Hall are not exceptional salesmen, but just the type of men that saw an opportunity and were quick to grasp it when within reach. No previous selling experience is necessary, just a little ambition on your part to make money is all we ask and we will extend the same opportunity to you. Spare time will pay you well. If you can devote your entire time so much the better, because the SUPER is a whirl-wind seller and takes hold in a locality like wildfire.

Men Wanted Everywhere To Introduce

We want distributors in all parts of the country to take orders and deliver the SUPER and to look after the repeat business that is bound to follow and to such distributors we are willing to assign territory. You do not have to own a Ford to take up this proposition but if you have a Ford it is easier to explain its many advantages. However a Trial of the SUPER convinces the most doubtful person and tells a wonderful story.

A REAL FUTURE HERE

WEEKS SUPER CARBURETOR CO.
426-871 Eleventh St., Milwaukee, Wis.

MAIL TODAY

WEEKS SUPER CARBURETOR CO.
426-871 Eleventh Street, Milwaukee, Wis.

GENTLEMEN: Please mail me full free particulars about your wonderful invention.

Name .....
St. or R.F.D. .....
Town .....
County .....
State .....

Copyrighted material

Popular Mechanics Magazine

200 E. Ontario Street, Chicago, U. S. A.

H. H. WINDSOR, Founder — H. H. WINDSOR, Jr., Editor and Publisher

London: Hachette & Cie., 16-17 King William Street, Charing Cross, W. C. 2

Paris: Hachette & Cie., 111 Rue Reaumur

Melbourne: Gordon & Gotch 509-513 Little Collins St.

ISSUED MONTHLY — SUBSCRIPTION: — SINGLE COPY, 25 CENTS

In United States and its possessions, also Canada, Cuba, and Mexico, per year, postpaid - $2.50

To all other countries in the Postal Union - - - - - - - - - - - 3.00

All subscriptions are discontinued at expiration. Please examine the date printed on your wrapper.

Entered as Second Class Matter Sept. 15, 1903, at the Post Office at Chicago, Illinois, under Act of March 3rd, 1879.
Entered as Second Class Matter at the Post Office Department, Canada.

Published monthly by POPULAR MECHANICS CO. Copyright, 1925, by Popular Mechanics Co. Copyright in Australia. Copyright in France

Vol. 44 — Contents for July, 1925 — No. 1

Aerial Postal Service—on the blazing trail of the air mail 62
Airplanes
flying risks cut by slots in wings of planes 13
metal "Pullmans of the air" 46
motor pushed across desert to save airplane 93
to have two decks 2
Airships—army dirigible to act as carrier for planes 13
Animals—few left that defy skill of trainers 54
Archery—revival of 90
Arctic Regions—three nations in air race to polar lands 7
Automobile
auto refined by research to stop wear and noise 109
automobile for every horse in United States 89
Automobiles—Equipment and Supplies
cover on auto tire padlock prevents rust and mars 93
holder for auto light bulbs folds out of the way 112
pads between spring leaves reduce auto bumps 64
suspension bed inside auto folds up in bag 16
Automobiles—Lighting—headlight dimmer on wheel 3
Automobiles—Safety Devices
auto glare screen fastens on windshield 99
automatic cranker on motor to prevent stalling 100
Automobiles—Tires—spare tire rack with spring saves lifting on and off 59
Aviation
automatic fire extinguisher for flyers 106
beacons that guide flyers across nation 63
floating isles to facilitate transatlantic aviation 12
Birds
big bills from mother nature 4
few high flyers, airplane pilots find 98
Birth Rate—increase declining in U. S. 16
Boats and Boating
light metal boat folds up on running board of auto 77
metal flying boat has sails 24
rowing rack on warship 72
sailboat with two hulls keeps better balance 40
Boilers—burning oil in water eliminates flue losses 6
Bridges
old bridge at Niagara replaced by new 78
six million dollar Bear Mountain bridge 32
three span concrete bridge seven hundred feet long 60
Cameras
handle for small, serves as tripod 100
serves as sextant to direct aviators 40
Camping—auto camping trunk holds bed and table 38
Cathedrals — Washington cathedral — building for eternity 27
Cement—used in lining Connaught tunnel 114
Clams—as pearl "incubators" 65
Clothing—overalls put on like coat 81
Colors—tester for fabrics 119
Connecting Rods—three-joint, stop airplane power loss 59
Corn—house of, built from school children's crop 119
Crime
clerks taught to guard bank by shots at dummy bandit 54
club filled with tear gas to rout bandits 17
Diseases
portable oxygen tent on cot 81
steel "lung" to cure ills by compressed air 120
Drugs—doctors' pills from hothouses 66
Earthquakes—Hawaiian volcano observatory 48
Electric Batteries—radium battery everlasting 88
Electric Irons—flatiron heat controlled by automatic cut-off 72
Electric Power—light plant runs itself 119
Electricity—centenary of electricity 101
Elephants—help hunt birds for museum specimens 48
Faucets—washerless and drip proof 105
Filing
box for memoranda 73
letter file for home 109
Fire Apparatus—pump run by auto wheel 46
Fire Protection
fighting fires from trains 96
one-man fire brigade 99
Fires
modern burning bush seen by Wyoming campers 32
Fish—rings on scales of salmon reveal its age 6
Fishing—fishing can for live bait, cigars and matches 25
Flashlights—have lamps on side and clips for belts 113
Food—animals slaughtered in this country last year 73
Furs—growing fur coats on farms 83
Games—European war game fad in America 99
Gas—lock on gas cock prevents accidental opening 77
Golf—folding holder for golf bag fits running board 6
Greenland—coast of, receding from Scotland 107
Grips—V-shaped rack in handbag keeps clothes pressed 92
Guns (Ordnance)—anti-aircraft machine gun shoots three miles high 60
Hammers—rubber pads in head absorb shock of blows 119
Hammocks—for students swung from benches 112
Household Devices 110
Houses—homes for lean purses 18
Industry—strange ways of earning a living 115
Inventions—doing the impossible 79
Jewelry—yearly total for arts 53
Ladders—ball and socket stepladder 98
Ladles—heated by electricity keeps contents liquid 11
Leather
science to improve, and make better shoes 60
Letter Openers—jackknife in handle of 14
Light
drink of ultra-violet light aids throat treatment 6
invisible, for signals to fool foes in air 112
Loading and Unloading
automatic box car dumper 88
tractor for scooping snow digs and loads dirt 48
Locomotives—geared steam turbine engine tested in England 108
Mental Tests—mind tests help students to pick careers 15
Microphones—"ear" detects hum of plane ten miles away 3
Mirrors—ice caves lighted by mirrors for taking movies 89
Models
of river steamers built by clerk as hobby 113
toy town home of live pets in children's museum 100
Mosquitoes
plant, "holy basil," to combat 39
umbrella used to replace smudge pot 11
Moving Pictures—for airplane tourists 53
Music—how much musical ability have you? 41
Musical Instruments—jazz horn sounds like trombone 32
Packing (for shipment)—excelsior from waste paper creates new industry 64
Paints—sand blast removes varnish for interior decorating 59
Patents—growth of patent office 37

[Continued on Page 4]

[Contents—Continued]

Pearls—pearl sorters wear blinders to help in color tests ... 37
Phrenology—character read by mirror that analyzes the face ... 107
Phones—midget phones for the deaf fit without headbands ... 39
Pipes (Tobacco)—cover on pipe for motorists adjustable to wind ... 98
folding pipe fits vest pocket ... 5
Police—at white house must be six feet tall ... 77
Power Plant—horsepower for each person equals forty-eight slaves ... 3
Presses—printing press for the home run by hand ... 114
Propellers—for boat or plane act as rudders ... 88
Puzzle—picture puzzles in coin book teach children thrift ... 17
Racks—newspaper rack for walls ... 54
Radio
predict ten million receivers in five years in U.S.A. 100
what you want to know about radio ... 175
Radio Antenna—hid in lamp shade ... 73
Radio Apparatus
efficient lighting switch ... 124
logging dial aids in locating stations ... 129
map on loop aerials hides the wires ... 133
radio dial setting record opens like fan ... 95
spring post makes quick connections ... 134
wood hinge on cabinet aids efficiency ... 125
Radio Application—esperanto taught by radio ... 106
Radio Battery—battery has built-in visible hydrometer 125
Radio Broadcasting—two-foot radio transmitter ... 105
Radio Construction
box aids in soldering radio wiring ... 134
fixing condenser for experiments ... 134
knockdown cabinet readily assembled by amateur 134
trouble shooting in eight-tube superheterodyne receiver ... 130
Radio Loud Speakers—loud speaker made from paper cone ... 125
Radio Photography—radio photo sent five thousand miles ... 1
Radio Receivers
set for motorist fits auto instrument board ... 14
set for travelers ... 121
six-tube self-contained loop set has coast to coast range ... 127
Radio Tubes
new tube works from light socket ... 55
tubes that won't burn out ... 92
Radium—world's supply of radium less than half a pound ... 95
Railroads—U.S.A.—names for freight trains to replace numbers ... 120
Roads—air-driven road smoother ... 95
Roosevelt Expedition, 1925—in Asia faces perils ... 93
Rust
anti-rust institute formed to combat corrosion ... 74
converted into metal restores ancient relics ... 24
Salesmanship—self-service radio store ... 74
Salt—workers refreshed by salt, resist heat of mines ... 109
Scaffolds—steel brackets for ... 39
Scales—for clubs and rackets show leverage weight ... 53
Science—martyrs of ... 49
Sharpener
automatic saw filer run by hand or motor ... 47
for lawn mower has renewable stone ... 59
Shipwrecks—artificial tide from ships dislodges boat ... 16
Slot Machines—sell pencils and stamp buyer's name ... 109
Smoke—sky curtain ... 33
Smoker's Stand, etc.—spring top for tobacco pouch ... 92
Solder and Soldering—rest useful in soldering ... 125
Street Railroads—gasoline-driven street car tested in New York ... 16
Street Traffic Regulations
spikes as traffic line marks ... 37
white sleeves assist police in giving traffic signals 25
Sundial—with several faces tells world time ... 47
Sun-heat sought as herald of cyclones and droughts ... 120
Swine—pigs grazed in cork forests to aid tree growth 81
Tables—Folding—fits auto door ... 61
Tar—oil burner for melting ... 31
Telephones—meter checks calls on automatic phone ... 78
Testing—making car ride smoother by rail joint tests 107
Tires—made to roll farther by chemical research ... 37
Tornadoes—ninety-four in United States every year ... 78
Tractors—one-cylinder motor plow ... 107
Trees
"snow" from cottonwoods prevented by acid spray 12
Type (Printing)—liner gauge for typesetters ... 89
Vanity Cases— in parasol grip saves carrying case ... 5
Walking Sticks—freak canes grown on trees by twisting branches ... 38
Waste Products—necessity forced to mother another invention ... 75
Water—sweetened with air ... 3
Waterproof—electroplated overcoats ... 98
Wheels
torch to heat engine wheels removes tires quickly 74
fitted to balloon tires by hand adapter ... 120
Woman—Occupations—with women in the field of science ... 94
Woodwork—machine has all tools on motor shaft ... 65
X-Ray—pictures by telephone ... 61

AMATEUR MECHANICS

Automobiles—Equipment and Supplies
compartment behind dashboard useful to autoist ... 151
sedan hat rack made from springs ... 158
Automobiles—Repairing ... ...
patching auto tops ... 150
repairing auto curtain fasteners ... 156
Birds—houses that grow from seeds ... 158
Boots and Shoes—how to care for shoes ... 141
Brushes—cleaning paintbrushes ... 143
Building—rain-proof sleeping porch ... 156
Built-In-Furniture for the Home—Part VIII—linen closet ... 153
Cabinet—for small parts ... 158
Cement—for water tanks or aquariums ... 139
Clocks—making a hall clock case ... 135
Coasters—building a scenic ... 140
Enamel—applying undercoat of ... 158
File—plane ... 139
Flies—chasing flies with a fan ... 142
Flood Lighting—homemade adjustable floodlight ... 150
Furniture—preventing bed from marring baseboard ... 156
Garages — Equipment and Supplies—platform for washing autos ... 157
Infants—making baby walker safe ... 143
Ladders—crosspiece on end of ladder aids in house painting ... 151
Loading and Unloading—hoist for filled sacks ... 142
Milk—separating cream from ... 156
Mower—mowing lawn banks ... 142
Oilcans—spout for large ... 138
Phonographs—mute for ... 137
Photography
diffusing screen for enlarging lantern ... 142
getting better photos of children ... 138
Pipes—repairing holes in water ... 158
Polish—homemade furniture ... 149
Postal Service—farmer's mail signal ... 139
Rubber—removing tissue of, from garments ... 142
Seesaws—folding, amuses children indoors ... 157
Study and Teaching—realistic method of studying geography ... 150
Tools—for the home mechanic ... 144
Traps and Trapping—hawk trap ... 143

SHOP NOTES

Automobiles—Repairing—auto coil tester ... 174
Barks—pressed bark for fuel ... 161
Bench—flat iron supports for ... 173
Concrete—mixing box aids concrete work ... 159
Drills—how to use twist drills, Part II ... 165
Electric Switch—safety guard on power switch ... 161
Garages—Equipment and Supplies—swinging booms on service car ... 164
Incubators—turning eggs in ... 171
Lathes—surface grinding in the ... 172
Lime—pulverizing stone fences ... 163
Measures and Measuring Instruments — emergency method of finding wire diameter ... 160
Mechanical Drawing—draftsman's tray ... 161
Milling Machinery—protecting the dividing head ... 162
Models—making "drawings" in wax ... 171
Paints
flat oil water paint ... 164
add water glass to paint to hasten drying ... 162
Photography—Apparatus and Supplies—borders for halftones ... 164
Printing—making printer's type and rule ... 174
Shades—painting old window ... 161
Sheet Metal—cutting heavy ... 174
Steel—hardening carbon steel tools ... 163
Tables—portable picnic ... 163
Trucks—for lumber yard ... 170

Copyrighted material

DRAKE'S PRACTICAL MECHANICAL BOOKS

THEY WILL RAISE YOUR PAY—

ORDER ON 5-DAY TRIAL

The books listed below will perfect you in your chosen trade—pave the way to the big positions. Written in non-technical language—easy to read and understand. ***Every book covers its subject completely. An entire course of instruction condensed into one volume.*** Your choice sent postpaid—you benefit 5 days—money refunded in full if not entirely satisfactory. Order direct from this page.

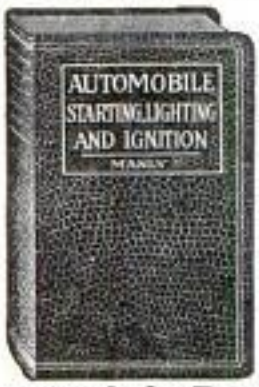

Automobile Books

Automobile Starting, Lighting and Ignition, by Manly. 700 pp. ..... Leatherette $3.00
Brookes' Automobile Handbook. 715 pp. ..... Leatherette $2.00
Ford Motor Car, Truck and Tractor, by Manly ..... Cloth $1.50
Automobile Battery, Care and Repair, by Manly .... Leatherette $2.00
Motorcycle Handbook, by Manly $1.50

Shop Practice Books

Sheet Metal Workers' Manual .... Leatherette $2.00
Oxy-Acetylene Welding and Cutting ..... Cloth $1.25
Slide Rule and Logar thmic Tables. ..... Leatherette $2.00
Handbook for Millwrights .... Cloth $2.00
Machine Shop Practice ..... Cloth $2.00
Mechanical Drawing and Machine Design ..... Cloth $2.00

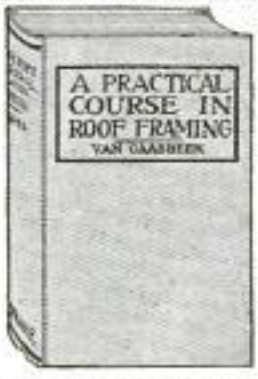

Carpentry Books

Cloth Binding

Modern Carpentry, 2 vols. $3.00
The Steel Square, 2 vols. $3.00
Modern Estimator $1.50
Timber Framing $2.00
Builder's Architectural Drawing ... $2.00
Concretes $1.50
Practical Bungalows $1.00
Roof Framing, by Van Gaasbeek ... $1.50

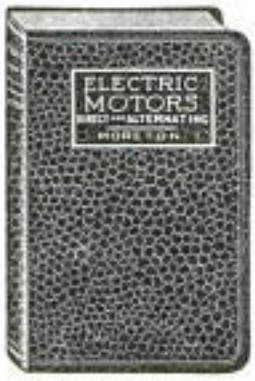

Electrical Books

Telephony, Including Automatic Switching, by Smith. 40 pp. Leatherette $2.50
Practical Applied Electricity $2.00
Wiring Diagrams and Descriptions. $1.50
Armature and Magnet Winding ... $1.50
Electric Motors, D. & A. $1.50

Steam Engineering

Swingle's Handbook for Steam Engineers and Electricians. Leatherette .. $4.00
Examination Questions and Answers for Marine and Stationary Engineers. Leatherette $2.00
Steam Boilers ..... Leatherette $2.00
Swingle's Catechism of Steam, Gas and Electrical Engineering. Leatherette $1.50

Painting Books

House Painting Methods with the Brush and Spray Gun by Vanderwalker. Cloth $2.00
Interior Wall Decoration, by Vanderwalker ..... Leatherette $4.00
The Mixing of Colors and Paints, by Vanderwalker ..... Cloth $2.00
A Show at Sho' Cards ..... Cloth $4.00
Sign Painting ..... Cloth $4.00
Strong's Book of Designs, Leatherette $4.00
Modern Painter's Cyclopedia . Cloth $2.00
Automobile Painting ..... Cloth $1.50
New Hardwood Finishing .... Cloth $1.50

Modern Languages

By Prof. P. S. Allen, U. of Chicago
French without a Teacher .... Cloth $1.25
Spanish without a Teacher ... Cloth $1.25
German without a Teacher ... Cloth $1.25
Everyday French $1.25
Everyday Spanish $1.25

ORDER DIRECT FROM THIS PAGE—ON OUR MONEY-BACK PLAN

The books listed above are only a few of the many in our catalogue, which you will receive promptly after filling out and mailing us the attached coupon. For quick action order direct from this page—cross name of each book wanted and send in with price quoted. We prepay postage and send the books on our money-back plan.

FREDERICK J. DRAKE & CO.
PUBLISHERS
1008 Michigan Ave., Chicago
Drake Books Are For Sale at All Book Stores

FREDERICK J. DRAKE & CO.
1008 Michigan Avenue
Chicago, Ill.

GENTLEMEN:—Please send me free, postage paid, your illustrated catalogue which lists and describes 200 Practical Mechanical Books for Home Study.

My name is .....

and my address .....

.....

Mail Coupon For Free Catalogue
Your Guide to Home Study

Copyrighted material

My Earnings Increased 500%

Thanks to Higher Accountancy

100% 200% 300% 400% 500%

"Today my earnings are 500 per cent larger than when I started with LaSalle," writes W. A. Melcher, a New Orleans man. "When I received my first LaSalle assignment in Higher Accountancy," he continues, "I was employed by a large produce house of this city. I left that position to audit with a local firm of accountants, and finally accepted a lucrative offer from the business house with which I am now connected. The personal touch which you give to your clear instructions makes the student realize that you have a very vital interest in his success."

Not an unusual report to receive from a LaSalle-trained man. During only six months' time as many as 1,248 LaSalle members reported definite salary-increases totalling $1,399,507. The average increase per man was 89 per cent. With men who are trained the LaSalle way, promotion is the rule, not the exception.

Send for Salary-Doubling Plan

Are you—like Melcher—following a well-organized plan to double—triple—quadruple your salary? Or are you relying for advancement upon day-to-day experience? LaSalle offers a sound and practical ***salary-doubling plan*** which has added millions and millions of dollars to the earning power of its members. If a successful career is worth a 2c stamp and two minutes of your time, check the field of advancement that appeals to you, fill in your name and address, and place the coupon in the mail TODAY.

LASALLE EXTENSION UNIVERSITY

The World's Largest Business Training Institution

Dept. 764-HR **Chicago**

I would welcome details of your *salary-doubling plan*, together with copy of "Accountancy, the Profession that Pays," also a copy of "Ten Years' Promotion in One," all without obligation.

☐ **Higher Accountancy**

Training for positions as Auditor, Comptroller, Certified Public Accountant, Cost Accountant, etc.

Other LaSalle Opportunities

LaSalle opens the way to success in every important field of business. If more interested in one of the fields indicated below, check here:

☐ Business Management
☐ Modern Salesmanship
☐ Traffic Management
☐ Railway Station Management
☐ Law—Degree of LL.B.
☐ Commercial Law
☐ Industrial Management Efficiency
☐ Banking and Finance
☐ Modern Business Correspondence and Practice
☐ Modern Foremanship and Production Methods
☐ Personnel and Employment Management
☐ Expert Bookkeeping
☐ Business English
☐ Commercial Spanish
☐ Effective Speaking
☐ C. P. A. Coaching

Name .....

Present Position.....

Address.....

More Fun ~Better Times ~New Friends!

When you learn to play your favorite instrument this quick, easy way.

Think of it—no more dull, lonely evenings! For even if you don't know a single note of music—you can now learn to play any instrument you like in a few short months—and without a teacher!

EASY—QUICK—ENJOYABLE!

This is through a remarkable home-study method that has taken the hard work and monotony out of learning to play. Every step is easy as A. B. C.—fascinating as a new game. From the beginning you play "real notes" and "real tunes." No exercises—no monotonous scales! And no matter which instrument you choose—the cost is the same—*just a few cents a lesson!*

Start at once. Soon you'll be able to entertain whenever you are called upon. Then you'll have a host of friends and be in great demand everywhere. Or if you wish you can join an orchestra.

FREE BOOKLET "Music Lessons in Your Own Home" tells all about this wonderful method. Don't delay! Send for it today—Now! No obligation! Instruments supplied when needed, cash or credit.

U. S. School of Music, 77 Brunswick Building, New York

STAMMER

If you stammer attend no Institute till you get my large FREE book entitled "STAMMERING, Its Origin and The Advanced Natural Method of Treatment." Ask for special tuition rate and a FREE copy of "The Natural Speech Magazine," published monthly in the interest of those afflicted with stammering, stuttering and other speech impediments. Largest, best equipped and most successful school in the world for the cure of stammering. Established 20 years. No sing-song or time-beat. Write today. **MILLARD INSTITUTE OF NORMAL SPEECH, 2317 Millard Bldg., MILWAUKEE, WIS.** Branch Summer School, Seattle, Wash.

"BECOME A LIGHTNING TRICK CARTOONIST"

MAKE MONEY CHALK TALKING. SEND $1.00 FOR SNAPPY PROGRAM OF TRICK DRAWINGS WITH INSTRUCTIONS BY A PROFESSIONAL CARTOONIST. SATISFACTION GUARANTEED. CIRCULAR FREE. **BALDA ART SERVICE, 01, OSHKOSH, WIS.**

"I WANT YOU"

MEN—BOYS 18 UP

$1700 to $3600 A YEAR

ALL POSTAL SALARIES JUST RAISED

Many U. S. Government jobs obtainable. Experience usually unnecessary. Common education sufficient. Write today sure for free list of positions and free sample coaching.

FRANKLIN INSTITUTE, Dept. E-174, ROCHESTER, N. Y.

30 Days' Free Trial

Select from **44 Styles**, colors and sizes, famous **Ranger** bicycles. **Delivered free** on approval, express prepaid, at **Factory Prices.** You can easily save $10 to $25 on your bicycle. Prices **$21.50** and up.

$5 a Month on any Ranger if desired. Parents often advance first deposit. Boys and girls can easily earn small monthly payments. Pay as you ride.

Tires best quality, at factory prices, express prepaid. Lamps, wheels and equipment, low prices. **Send No Money,** do business direct with makers.

Mead CYCLE COMPANY DEPT. G-108 CHICAGO

Write today for free Ranger Catalog, factory prices and marvelous easy payment terms

Copyrighted material

CARPENTERS

LET THIS NEW AUDEL SET SOLVE YOUR PROBLEMS

KNOW your job and you'll never be without one. The man who takes pride in his personal skill is the man that is always in demand. The skilled carpenter's work is the easiest because he knows the practical short cuts and modern methods. His pay is higher because he does more and better work with less effort. *Audel's Carpenters' & Builders' Guides* gives you a Helping Hand into the Master Class. A complete Carpenter's and Builder's Course for study and ready reference.

Helping Hand Is Extended to You

Carpenters everywhere are using AUDEL'S CARPENTERS' & BUILDERS' GUIDES as a helping hand to easier work, better work and better pay. To get this assistance for yourself you need only use the coupon below without risk. Find out for yourself whether they will be a valuable daily assistant in your work. If you find that the hundreds of charts, tables, diagrams, specifications and instructions will help you, keep the books, sending $1 a month for 6 months.

Strong, flexible covers — easy to carry in the pocket. Clear white paper. A handsome set of practical, helpful books that every carpenter will be proud to own.

Condensed Contents of Audel's New Guides

Guide No. 1 — 431 Pages
1200 ILLUSTRATIONS

Use of tools, different woods, nails and screws, filing saws, chalk line, plumb and level, rules and scales, miter boxes, steel square, laying-out work, joints and joinery, how to build work bench and furniture.

Guide No. 2 — 455 Pages
400 ILLUSTRATIONS

Carpenters' Arithmetic, how to build houses, barns, garages, bungalows; reading plans, drawing up specifications, estimating cost, proportioning beams, estimating strength of timbers, mensuration, geometry, trigonometry.

Guide No. 3 — 255 Pages
400 ILLUSTRATIONS

Excavating foundations, how to build concrete forms, framing houses, setting girders and sills, framing joists, well holes, how to lath, types of roofs, tangents, skylights, and scaffolding and hoisting.

Guide No. 4 — 448 Pages
400 ILLUSTRATIONS

Shingling, how to lay roofs, hang doors, frame windows; building stairs; cornice work, exterior and interior trim, laying floors, putting on siding, painting, and first aid to the injured.

4 HANDY POCKET SIZE GUIDES
BIG TYPE-EASY TO READ AND LEARN
1500 PAGES-3700 EXAMPLES

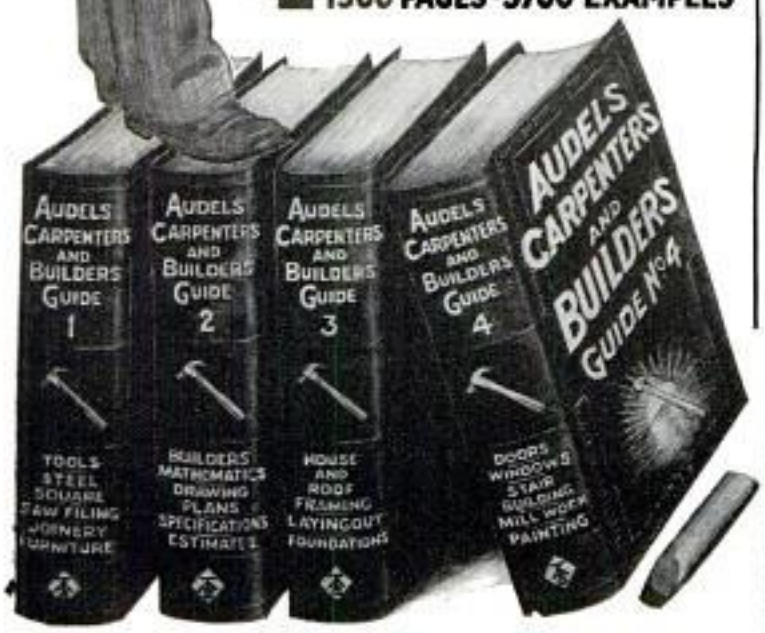

Use This Free Coupon Now!

Take this step now into the Skilled Carpenter Class. Don't keep on doing hard or unnecessary work that you don't have to do. Learn the short cuts and easier modern methods. Be a Master Worker. Let these Practical Guides give you a helping hand into the class where you belong.

FREE EXAMINATION COUPON

THEO. AUDEL & CO.
72 Fifth Avenue, New York City

Please submit me for approval and free examination: **AUDEL'S CARPENTERS' AND BUILDERS' GUIDES**. Ship at once, prepaid, the 4 numbers. If satisfactory I agree to send you $1 within five days and to further mail you $1 monthly until $6 is paid.

Name .....

Address .....

Occupation .....

Employed by 7-T-30

Copyrighted material

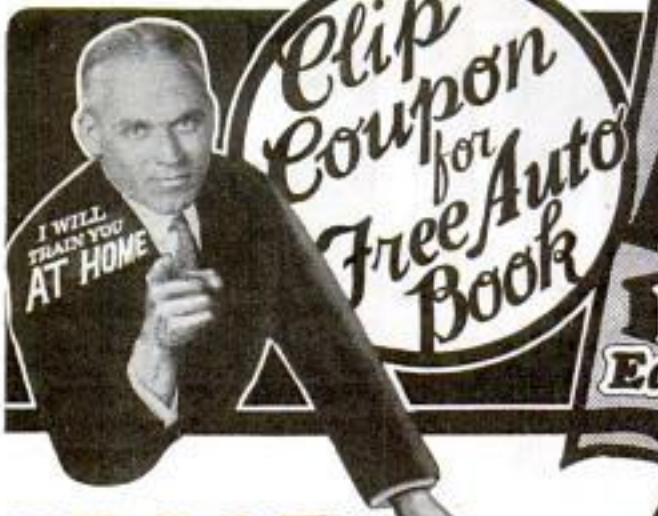

Clip Coupon for Free Auto Book

BE AN AUTO EXPERT

Earn $3000 to $10,000 a year

Learn AT HOME the Cooke "JOB-WAY"

PROOF! See What I Can Do For YOU!

Send coupon for this amazing Book right now. It's Free! See what this book has done for others. See what it can do for you! Just think of this!—Walter Mayville, Harold Lester, M. J. Morriston, Herbert Trask, Allen Pomeroy and dozens of others without a day's previous Auto experience—**in only 2 to 6 months** after enrolling—were **in business** for themselves, **making real money,** with more business than they could take care of. My Free Book tells you all about their wonderful successes. Send for it!

Start to Make Money Quick!

You don't have to wait to finish to make real money with Cooke "Job-Way" training. Most of my students make money almost right from the start.

$700 in Spare Time Money That's what Cleo Crowl, 215 Washington St., Medford, Oregon, earned in spare time before graduation. More than seven times what his training cost. See how you can make your spare time bring you CASH.

100% Raise in 10 Months Harry Atkins, 35 Day St., Fitchburg, Mass., made enough in his spare time to pay up all of his debts—and on top of that **Doubled His Salary** in 10 short months. Every one of these men gives "Job-Way" training full credit for his success.

GET THE FACTS!

Send for this remarkable Free Auto Book. Find out how you can do what these men did. ACT NOW!

3 BIG OUTFITS Free!

Tools, Test Bench, Radio Receiving Set, **All Equipment Free.** Also 293 wiring diagram charts *FREE.* Special offer. Act quick. Clip coupon for full details.

The World's Biggest Business Needs You!

If you're earning a cent less than $75 a week, **clip coupon now.** Get my Free Book. Let me show you how Five Thousand Million Dollars are spent every year for **Auto Upkeep Alone.** From $21 a week to **$300 A WEEK** is what Cooke "Job-Way" did for Joseph Woronecki, Hartford, Conn. This tremendous Field **offers you** most amazing opportunities. Positions Everywhere. THOUSANDS OF BIG PAY OPPORTUNITIES for Cooke "Job-Way" trained men to Boss Jobs or start Your Own Business and make $3000 to $10,000 a year and **more.** Find out **now** about Cooke "Job-Way" Auto-Training—the exclusive, genuine "Job-Way" Training.

Earn $60 to $200 a Week!

Don't sell your time for a penny less. You don't need to with my "Job-Way" Training. Be a Big Pay man. My book will show you the way.

LEARN RIGHT AT HOME!

Keep your present job. Get started on the way to Big Pay as an Auto Expert, through Cooke "Job-Way," quickly, easily, right in your own home. Send for my free book; it shows you how successful I've been and how successful I am. Being a practical Directing Engineer, Owner and Head of this Institution, **I know** what practical, money making training **you need** to be a BIG PAY MAN—and **that** training **I give you.**

The Only "Job-Way" Training on Earth!

My training includes ALL Electrical work—Ignition, Starting, Lighting—All Mechanical and Welding, Brazing, Vulcanizing—also Business Course, Salesmanship, Advertising, Buying, How to Keep Simple Books—also Free Magazine, also 3 Free Outfits. Nowhere else I know of, can get you ALL this training.

B. W. Cooke is in no way connected with any other person or training of similar name. Nowhere else can you get the original, genuine, copyrighted Cooke "JOB-WAY" training. I train you with Tools which I give you and illustrated JOBS—**not books.** Find out how "Job-Way" fits you for Big Pay. Learn what it has done for others, see what it can do for you. MAIL COUPON TO ME RIGHT NOW!

EXPERIENCE or EDUCATION Not Needed!

Men of all ages and with little education become Garage Owners, Managers, Superintendents, Foremen, Auto Experts, in the class with BIG PAY executives, with Cooke "JOB-WAY" Training. I back you up with the entire resources of this great Institution. Free Employment service for your whole life. Also Free Lifetime Consultation service.

Notice on this page what a few of my students have done—then send for my **Free Auto Book** right away!

MAIL THIS COUPON

B. W. COOKE, Directing Engineer
Chicago Auto Shops, Dept. B16
1916 Sunnyside Ave., CHICAGO, ILL.

Send me FREE Auto Book and proof that I can become an Auto Expert at home in spare time. Also send your special offers of 3 FREE outfits.

Name .....
Address .....
Town ..... State .....

Address me personally **B. W. Cooke** **Directing Engineer**

CHICAGO AUTO SHOPS

The Famous "Job-Way" Training Institution

1916 Sunnyside Ave. Dept. B16 Chicago, Ill.

If it isn't B. W. Cooke Way—It isn't "JOB-WAY"

Copyrighted material

BUILDING TRADES NEED TRAINED MEN

Thousands of good positions at good salaries

THE building trades are still booming. Trained men are in demand at good salaries. Government experts estimate that billions of dollars will be spent for construction this year. *And that is only a start!*

"It will take us 12 years, working 25 per cent above normal," said John Ihlder, Manager of the Civic Development Department of the United States Chamber of Commerce, "to provide as adequately for our population as before the war."

To-day the most vital need of this great building program is men—*trained men*—men who can step right in and do the skilled work that building construction requires.

There is a simple, easy, practical way by which you can prepare for a better position, at a bigger salary. You can do it right at home, in spare time, no matter where you live, through the International Correspondence Schools.

There is no question—no doubt—about this. For 33 years the I. C. S. has been training men for advancement in the building trades and in many other business and technical subjects.

A recent investigation of 13,298 students enrolled in I. C. S. Building Trades Courses showed that 1291 had become Architects, 246 had become Designers, 494 had become Chief Draftsmen, 2827 had become Draftsmen, 1845 had become Contractors, 211 had become Assistant Foremen, 4030 had become Foremen, 2354 had become Superintendents.

You, too, can have the position you want in the work you like best, an income that will give you and your family the home, the comforts, the luxuries you would like them to have.

All we ask is the chance to prove it. That's fair, isn't it? Then mark and mail this coupon.

— — — — — — — TEAR OUT HERE — — — — — — —

INTERNATIONAL CORRESPONDENCE SCHOOL
Box 5518-E, Scranton, Penna.

Without cost or obligation, please tell me how I can qualify for the position or in the subject before which I have marked an X in the list below:

TECHNICAL AND INDUSTRIAL COURSES

- ☐ Architect
- ☐ Architectural Draftsman
- ☐ Reading Architects' Blue Prints
- ☐ Building Foreman
- ☐ Concrete Builder
- ☐ Contractor and Builder
- ☐ Structural Draftsman
- ☐ Structural Engineer
- ☐ Electrician
- ☐ Electrical Engineer
- ☐ Electrical Contractor
- ☐ Electric Wiring
- ☐ Mechanical Engineer
- ☐ Mechanical Draftsman
- ☐ Machine Shop Practice
- ☐ Toolmaker
- ☐ Civil Engineering
- ☐ Surveying and Mapping
- ☐ Gas Engine Operating
- ☐ Automobile Work
- ☐ Airplane Engines
- ☐ Plumber and Steam Fitter
- ☐ Plumbing Inspector
- ☐ Foreman Plumber
- ☐ Heating and Ventilation
- ☐ Sheet Metal Worker
- ☐ Steam Engineer
- ☐ Railroad Positions
- ☐ Chemistry
- ☐ Pharmacy
- ☐ Metallurgy
- ☐ Mining Engineer
- ☐ Navigation
- ☐ Mathematics
- ☐ Radio

BUSINESS TRAINING COURSES

- ☐ Business Management
- ☐ Industrial Management
- ☐ Personnel Organization
- ☐ Traffic Management
- ☐ Business Law
- ☐ Banking and Banking Law
- ☐ Accountancy (including C. P. A.)
- ☐ Nicholson Cost Accounting
- ☐ Bookkeeping
- ☐ Business English
- ☐ Private Secretary
- ☐ Business Spanish
- ☐ Salesmanship
- ☐ Advertising
- ☐ Better Letters
- ☐ Foreign Trade
- ☐ Show Card Lettering
- ☐ Stenography and Typing
- ☐ Teacher
- ☐ Civil Service
- ☐ Railway Mail Clerk
- ☐ Common School Subjects
- ☐ High School Subjects
- ☐ Illustrating
- ☐ Cartooning
- ☐ French

Name .....

Street Address .....

City ..... State .....

Occupation .....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada.

Copyrighted material

I Trained Them To Make $3500.00 a year

I HAVE hundreds of letters like these which tell the gripping, stirring story of men rescued from ordinary, get-no-where lives—rescued from incessant worry over threatened unemployment. Stories of unskilled, underpaid men transformed into professional men in a few short months with a comfortable, steady income, and the doors of opportunity wide open before them.

And I did it. Men without training, without experience or preparation—men who did not know a T-square from a triangle—I trained them into practical draftsmen, sure of themselves, certain of steady employment and a good salary.

I spoke to them just as I now speak to you. I offered to help them, just as I now offer to help you. I told them of the wonderful opportunities in the drafting field, of the steady, permanent positions that are always open to skilled draftsmen. I invited them to come out of the rut. They listened to me and succeeded.

I Guarantee to Train You

You, too, can succeed. I say to you—You don't need any experience or preparation, you don't need special ability. **I guarantee** to train you at home, in spare time, giving your work **Personal Supervision** until you are ready to take a good, paying position. All you need is gumption enough to sit right down, fill in the coupon below and mail it to me for my FREE book that tells you of a simple, easy, inexpensive way to become a skilled, high-salaried draftsman.

May Cost You *NOTHING*

I have an offer whereby you may earn my regular $90.00 drafting course while you are my student, if you will do certain work for me at home during your spare time, which will not interfere with your present work or position. I will tell you all about it when I receive your coupon.

Drawing Table
Drawing Tools **Without Extra Charge**

Adjustable and folding Drawing Table, also complete set of imported Drawing Instruments, made of high-class nickel silver, will be sent to you at once when you are my working student. There is no extra charge for this Drawing Outfit and Drawing Table.

Mail Coupon Today for Free Book "Successful Draftsmanship";

Chief Draftsman Dobe
1951 Lawrence Ave., Div. B-135 Chicago, Ill.

Without any obligation whatsoever, please mail your book, "Successful Draftsmanship", and full particulars of your liberal "Personal Instruction" offer to a limited number of students.

Name.....

Address.....

Age..... Post Office..... State.....

$700 a week from his own Photograph Studio

"My income now averages from $700 to $1000 a week," writes Michael Gallo, who owns his own photographic studio on fashionable Fifth Avenue, New York. He adds, "My portrait studies bring me as much as $250 a dozen."

Hundreds of others are earning big money everywhere. Amazing growth of Professional Photography offers chance of a lifetime; high salaried position or your own business. $20 to $75 a week in spare time!

LEARN AT HOME

No previous experience or special ability needed. New easy method makes you a Professional Photographer in spare hours at home. Famous experts of New York Institute of Photography train you by mail. All branches: Motion Picture, Portraiture, Commercial, News Photography. Earn while learning.

MOTION PICTURE OR 5 x 7 VIEW CAMERA FREE

Your choice absolutely free. Motion Picture Camera takes real Motion Pictures on standard professional film used by all theatres—View Camera is latest professional model for all still photography; genuine anastigmat lens.

WRITE FOR BOOK

Handsome big new book explains wonderful opportunities; positions paying $50 to $250 a week, how to start your own business, how to earn money in spare time. Send postcard or letter today for FREE BOOK and free Camera offer.

New York Institute of Photography, Dept. 49,
143 West 36th Street NEW YORK, N. Y.

NOTE

If you prefer to come to our New York or Chicago Studios for personal instruction, day or evening classes, write for Catalog R-49 to nearest address: 141 W. 36th St., New York, N. Y., or 630 S. Wabash Avenue, Chicago, Ill.

BE A PRACTICAL ARTIST!

Win Fame and Fortune. The new book, "PRACTICAL ART," tells you how. 86 Lessons, over 225 illustrations. Drawing made easy, complete instruction. Covers layouts, illustrations, cartooning, lettering for art students, cartoonists, commercial artists, fashion artists and illustrators. Written by Manuel Rosenberg, well known illustrator. $5.00 per copy, postpaid.

SIGNS OF THE TIMES
Publishers Cincinnati, Ohio

Music Lessons WITH ACCREDITED SCHOOL At Home

Complete Conservatory Course by Mail

Wonderful home study music lessons under great American and European teachers. Endorsed by Paderewski. Master teachers guide and coach you. Lessons a marvel of simplicity and completeness.

Any Instrument Write naming course you are interested in: Piano, Harmony, Voice, Public School Music, Violin, Cornet, Mandolin, Guitar, Banjo or Reed Organ—and we will send FREE CATALOG. **SEND for it NOW!**

University Extension Conservatory, 173 Siegel-Myers Bldg., Chicago

Can you afford to STAMMER?

or STUTTER

Correct your speech and double your income. Don't be a failure. Lewis is oldest, largest and best-equipped institute. Both resident and home-study courses. More than 10,000 graduates. Catalog on request.

THE LEWIS INSTITUTE DETROIT, MICHIGAN 153 Stimson Avenue

LEARN WATCH REPAIRING

You can learn by our modern and original system of instruction every part of the **Watch Repairing Trade** at home as good or better than at a shop. You can earn money while learning and secure a well paying position or start in business after completing our course of instruction. Good watch repairers are always in demand and earn from $50 to $75 per week. For particulars apply to the **Wisconsin School of Watch Repairing**
166 Mason St., MILWAUKEE, WIS.

Copyrighted material

FREE RAILROAD FARE

You Can Learn Electricity in Only 12 Weeks

Earn $60 to $200 per Week

Get PRACTICAL Training in the Great Shops of

COYNE

Student Winding Stator

Make Your Career a Happy One in the Clean, Fascinating, Profitable Field of ELECTRICITY. COYNE-Trained Men Are in Demand

Here's a proposition that should arouse the enthusiasm of every red-blooded, ambitious fellow. Why not make this your happiest and most profitable summer? Come to Chicago, the great, interesting summer resort and city of opportunities. I'll pay your railroad fare here, and you can prepare yourself, in 12 happy weeks at COYNE ELECTRICAL SCHOOL, to join the ranks of successful *Big Pay* men. Why gamble on other lines of work when the field of Electricity offers millions of amazing opportunities?

Complete Electrical Training in 12 Weeks

—NOT BY CORRESPONDENCE—ALL PRACTICAL WORK—

I have started thousands of men, young and old, on the road to success and independence. I can do the same for you. I teach you everything in Electricity from A to Z, by practical instruction. Nothing that will help to make you a success is left out.

Experience, Education Not Needed

I can teach you Electricity in 12 weeks regardless of your education or experience because I teach you every detail in a simple, logical, PRACTICAL manner, letting you work out problems on thousands of dollars' worth of modern electrical apparatus in my great COYNE shops. My instructors are trained men with years of experience.

Learn in Chicago, Electrical Center of the World

Chicago is the great electrical and industrial center, therefore it presents real opportunities for you. Along with my shop training you visit the big industrial organizations and power plants and see every kind of electrical equipment in operation, on every kind of job, under all conditions.

EARN While You LEARN

My Employment Department helps you get a job to earn a good part of your expenses and assists you to a good job on graduation.

Hear COYNE on the Air—WGES (formerly WTAY)

Listen in on Coyne Radio Station WGES; wave length, 250 meters. On June 16 and June 23 at 10:30 p. m. (daylight saving time) I am going to deliver a special message to you.

You'll Enjoy a Summer in Chicago, the Wonderful Summer Resort City

Chicago, on beautiful Lake Michigan, is the Nation's Summer Playground. Free Bathing Beaches, Beautiful Parks, Excursion Boats and the great Municipal Pier, Zoos, Ball Parks. The daylight saving plan makes it possible for you to enjoy all these and still have plenty of time for your Electrical education.

Send Coupon NOW for My Big, New FREE Book

Right now I am making one of the greatest offers ever made by a Practical Training Institution. My offer includes FREE RAILROAD FARE to Chicago from any place in the U. S.; also extra special FREE radio and Auto Courses. Be sure to send the coupon AT ONCE, even if you are not planning to come immediately.

H. C. LEWIS, President
COYNE ELECTRICAL SCHOOL
1300-10 W. Harrison St., Dept. B-135
CHICAGO, ILLINOIS

Dear H. C.—I sure want one of those big handsome 12x15 books with 151 actual photographs printed in two colors. Send it quick without obligating me. Also tell me about the *Free Railroad Fare* and *Two Free Courses*.

NAME.....

ADDRESS.....

H. C. LEWIS, *President*

COYNE

FOUNDED 1899 27th Year

ELECTRICAL SCHOOL

Dept. B-135 1300-10 W. Harrison St., CHICAGO, ILL.

Copyrighted material

Aviation Brings Quick Success!

Wide World Photo

Sudden New Demand for Daring Young Men!

AVIATION in America is on the threshold of an amazing new development. For in the past few months gigantic commercial air lines have been established. The biggest capital and business forces in the world are behind this enterprise. Even in the beginning, thousands of young men are needed. For those who can qualify there will be highly paid jobs which will lead quickly and surely to advancement and success.

Big Opportunities Await the Trained Man

Look over the fields of work which are open to the young man today. You will find that Aviation is the ONE FIELD that is not overcrowded—the ONE FIELD in which there is plenty of room at the top. Think of it! Only 21 years ago Orville and Wilbur Wright made the world's first airplane flight. Now airplanes fly around the world. Yes, Aviation offers the same wonderful opportunities today that the automobile and motion picture industries did 15 and 20 years ago. Men who got in on the ground floor of those industries made fortunes before others woke up.

PREPARE FOR ONE OF THESE POSITIONS

Aeronautical Instructor
$60 to $150 per week
Aeronautical Engineer
$100 to $300 per week
Aeronautical Contractor
Enormous Profits
Aeroplane Repairman
$60 to $75 per week
Aeroplane Mechanician
$40 to $60 per week
Aeroplane Inspector
$50 to $70 per week
Aeroplane Salesman
$5,000 per week and up
Aeroplane Assembler
$40 to $65 per week
Aeroplane Builder
$75 to $200 per week

Easy to Become an Aviation Expert—$50 to $100 a Week

You can qualify now quickly for one of these exciting highly paid jobs through a new, sure, easy method of training. The study of Aviation is almost as interesting as the work itself. Every lesson is fascinating and packed full of interest. That's why Aviation is so easy to learn—you don't have to force yourself to study. Only one hour of spare time a day will give you the basic training in an amazingly short time.

One student, S. F. McNaughton, Chicago, says: "Your lessons are like a romance, and what is more, after one reading, the student gets a thorough understanding. One never tires of reading them." James Powers, Pa., another student, says: "I am indeed surprised that such a valuable course can be had from such practical men for so little cost."

Men who have had actual experience in Aviation give you personal attention and guide you carefully through your training. They select the lessons, lectures, blueprints and bulletins. They tell you the things that are essential to your success. Every lesson is easy to read and quickly understood.

Big Book on Aviation FREE

Send coupon below for New Free Book, just out, "Opportunities in the Airplane Industry." It is interesting and instructive and will show you many things about Aviation which you never knew before. Only a limited number offered—get yours before the edition is exhausted.

AMERICAN SCHOOL OF AVIATION
Dept. 135-B, 3601 Michigan Ave., Chicago, Ill.

American School of Aviation,
3601 Michigan Ave., Dept. 135-B, Chicago, Ill.

Without any obligation, send me your Free Book, "Opportunities in the Airplane Industry," also information about your Course in Practical Aeronautics.

Name.....

Street.....

City..... State.....

Copyrighted material

TENOR BANJO FREE!

FULL SIZE

WORTH $18.

YOU CAN PLAY IT IN 30 MINUTES

40,000 successful students back up our guarantee that you can play a piece in 30 minutes by following our printed instructions. You get this $18.00 TENOR BANJO, FREE, as soon as you enroll for 52 easy lessons. New low prices and easy terms!

PICTURE LESSONS MAKE IT EASY

You can't fail to learn because the pictures explain every move. You don't have to be able to read notes. Better than oral instructions. We teach you in the largest conservatory, by mail.

PLAY FOR FUN OR MONEY

Don't be a wallflower. Get in on parties. Entertain your friends. Be popular. Play for dances, etc. Form an orchestra. Our 52 lesson course will make you an expert. Earn money in spare time.

WRITE FOR SPECIAL FREE OFFER

Famous teachers will explain how we can positively teach you to play. You get the free $18.00 Tenor Banjo with the first lesson.

We also give you Absolutely Free, a Fabrikoid carrying case. Pay while you play.

FIRST HAWAIIAN CONSERVATORY OF MUSIC, Inc.
Woolworth Bldg., Dept. 60 New York, N. Y.

Tri-State College of Engineering

Makes you a Civil, Mechanical, Electrical or Chemical Engineer in two years, 48 weeks each. No entrance examinations. High School Diploma not required. Compact courses made up of essentials only. Expenses low. For catalog address, Box M-7, Angola, Ind.

Hotels Start You With Salaries up to $3,500 a Year
— with your living

HOTELS, restaurants, clubs, apartments, everywhere need trained men and women—salaries to start up to $3500 a year with your living. Over 70,000 high-class positions paying up to $10,000 a year are open every year in the hotels of the United States. Today this is the 1st INDUSTRY IN AMERICA—with over $992,394,968 in new hotels being built in 1925—exceeding by $200,000,000 the next largest industry. These new hotels, restaurants, etc., will need over 60,000 trained men and women.

You can have one of these high-class big-pay positions, with luxurious meals and apartment and fascinating work. No previous experience necessary. The Lewis Schools **guarantee** to give you the valuable knowledge that it has taken some of the most successful hotel men years to obtain—men who are now making $5,000 to $50,000 a year. We train you by mail in your spare time at home with the Lewis Simplified Study Plan, and we put you in touch with big opportunities. Our students employed, our methods endorsed by leading hotel men everywhere.

Send today for Free Book, **"YOUR BIG OPPORTUNITY,"** showing how we can train you for one of these splendid positions in 20 weeks or less, and explaining our Money-Back Guarantee.

LEWIS HOTEL TRAINING SCHOOLS
Room T-388 Washington, D. C.

FREE BOOK COUPON

LEWIS HOTEL TRAINING SCHOOLS, Room T-388, WASHINGTON, D. C.
Send me without obligation the Free Book, "YOUR BIG OPPORTUNITY."

Name .....

Address .....

City ..... State .....

High School Course in Two Years!

You Want to Earn Big Money!

And you will not be satisfied unless you earn steady promotion. But are you prepared for the job ahead of you? Do you measure up to the standard that insures success? For a more responsible position a fairly good education is necessary. To write a sensible business letter, to prepare estimates, to figure cost and to compute interest, you must have a certain amount of preparation. All this you must be able to do before you will earn promotion.

Many business houses hire no men whose general knowledge is not equal to a high school course. Why? Because big business refuses to burden itself with men who are barred from promotion by the lack of elementary education.

Can You Qualify for a Better Position

We have a plan whereby you can. We can give you a complete but simplified high school course in two years, giving you all the essentials that form the foundation of practical business. It will prepare you to hold your own where competition is keen and exacting. Do not doubt your ability, but make up your mind to it and you will soon have the requirements that will bring you success and big money. YOU CAN DO IT.

Let us show you how to get on the road to success. It will not cost you a single working hour. Write today. It costs you nothing but a stamp.

American School

Dept. HB74, Drexel Ave. and 58th St., Chicago

American School

Dept. HB74, Drexel Ave. and 58th St., Chicago

Send me full information on the subject checked and how you will help me win success.

....Architect	....Business Law
....Building Contractor	....Lawyer
....Automobile Engineer	....Machine Shop Practice
....Automobile Repairman	....Mechanical Engineer
....Civil Engineer	....Shop Superintendent
....Structural Engineer	....Employment Manager
....Business Manager	....Steam Engineer
....Cert. Public Accountant	....Foremanship
....Accountant and Auditor	....Sanitary Engineer
....Bookkeeper	....Surveyor (& Mapping)
....Draftsman and Designer	....Telephone Engineer
....Electrical Engineer	....Telegraph Engineer
....Electric Light & Power	....High School Graduate
....General Education	....Wireless Radio
....Vocational Guidance	....Undecided

Name .....

Address .....

.....

Copyrighted material

BARBERING

Now One of the Highest Paid Professions! Every Week! $90 to 150

Easy to Learn—Quick to Earn! That's BARBERING for YOU! And the *best* part of it all is this—scientific barbering, as taught the modern MOLER way, makes YOU a Master Barber in a *short* course of *intensive training, at small expense!* You soon step out as your *own* Boss, if you wish, in your *own* Shop, which we will gladly help you equip.

MOLER Graduates are Always Busy!

MOLER trained Men are always given the preference, for they *alone* possess the valuable, *thorough* MOLER training in the application of all the *latest scientific Barbering methods*, including the Electric hair cutter, the mechanical massage, and the latest vogues in ladies' hair bobbing. MOLER also gives special training in ladies' marcelling and an easy practical course in the treatment of skin diseases.

EARN WHILE LEARNING!

"Where there's a Will there's a Way" to earn BIG pay! Write to the nearest MOLER College, *there is one near you*, and learn how you can *earn* while you learn the barber trade. Ask for the new FREE MOLER Barbering Booklet B. Find out HOW MOLER helps you help yourself AFTER you graduate, as well as BEFORE! Find out why MOLER Men are making DOUBLE the money others made last year, before Ladies' Shingle Bobbing became so popular. You're NEXT in line for big pay—the MOLER way. Send Coupon *TODAY!*

Moler System of Colleges

30 Branches in United States and Canada

New York, N. Y.	Detroit, Mich.	Atlanta, Ga.
Chicago, Ill.	Denver, Colo.	Memphis, Tenn.
St. Louis, Mo.	Omaha, Nebr.	Dallas, Tex.
Kansas City, Mo.	Milwaukee, Wis.	Houston, Tex.
Cincinnati, Ohio	New Orleans, La.	San Antonio, Tex.
Cleveland, Ohio		

MOLER SYSTEM OF COLLEGES
Address Nearest Branch
(Street Address NOT Needed)

Please send me without obligation on my part your Booklet B.

Name .....

Address .....

City .....State.....

We Teach COMMERCIAL ART

Meyer Both Company, the largest Commercial Art Organization in the World offers you a practical training based upon twenty-five years of success. This nationally known organization each year produces and sells to advertisers over 15,000 commercial drawings. This well paid profession equally open to men and women. Home study instruction.

Get Facts Before You Enroll in Any School

Ask the Advertising Manager of the leading newspapers in your city about Meyer Both Company—let them tell you about us. Send four cents in stamps for illustrated book telling of the success of our students.

MEYER BOTH COMPANY
Department of Art Instruction
CHICAGO, ILLS.
Michigan Ave. at 20th St. Dept. 16
Note—To Art and Engraving Firms: Secure artists among our graduates. Write us.

"STAMMERING Its Cause and Cure"

You can be quickly cured if you stammer. Send 10 cents, coin or stamps, for 288 page cloth bound book on Stammering and Stuttering. It tells how I cured myself after Stammering and Stuttering for 20 years. BENJAMIN N. BOGUE
6923 Bogue Building, 1147 N. Ill. St. Indianapolis

MUSIC LESSONS FREE

IN YOUR OWN HOME

Piano, Organ, Violin, Mandolin, Guitar, Banjo, etc.
Beginners or advanced players. One lesson weekly. Illustrations make everything plain. Only expense about 2c per day to cover cost of postage and music used. Write for **FREE** booklet which explains everything in full.
AMERICAN SCHOOL OF MUSIC, 51 Lakeside Building, CHICAGO

WHY NOT spend Spring, Summer and Fall gathering butterflies, insects? I buy hundreds of kinds for collections. Some worth $1 to $7 each; simple outdoor work with my instructions, pictures, price-list. Send 10c (not stamps) for my Illustrated Prospectus before sending butterflies.

Mr. Sinclair, Dealer in Insects, Dept. 6, Box 1424, San Diego, Calif.

LEARN PIANO TUNING AT HOME

With our TUNE-A-PHONE, Action Model, tools, charts and lessons you can learn quickly and easily and be prepared to make big money. Estb., 1898. Money-back Guarantee. Diploma given. Amazing Surprise in our free book, "Winning Independence." Write for it today.
Niles Bryant School of Piano Tuning. 40 Bryant Bldg., Augusta, Mich.

LEARN WATCH REPAIRING

Be a watchmaker—you can learn this profitable trade by correspondence in a few weeks in your own home by the DeSelms Chart System. After you complete the course you will know a watch from A to Z. You will know just what the matter is and how to repair one. When you graduate you will be a practical watchmaker and repairer and competent to fill any position. Positions for our graduates. **Ask for our Free Book. It explains our system and terms.**

THE DeSELMS WATCH SCHOOL
LOGANSPORT, INDIANA

Copyrighted material

Cut Out the Rough Stuff!

was all right for Dad to say when we kids fought with each other. We had to act as little gentlemen then.

But now we're men — we have men's jobs to fill. And no weak mollycoddle has a chance in filling a man's job. If you want success, you have to battle for it. And if you think you can win any kind of battle with a weak, flat-chested, debilitated body, you're all wrong. A weak body means a slow-acting brain. That means you've lost your snap and you're out of luck.

It's the big, robust, two-fisted fellow that gets there. He just forces his way, no matter where he is. And everybody likes him, too. Of course they do. He's alive. He's full of pep. He doesn't go to sleep on the job. He has too much energy for that.

How Does He Get That Way?

Well, he never got it lying around in a rocking-chair. That's a cinch. There's only one way you can get big, dominant strength—that's exercise; and when I say exercise, I don't mean any dancing lesson either. That's all right for girls. But you're a man. You want a man's body. You want muscle and plenty of it. What you want is what I give.

I Give Life

I make strong men. I make live men. I build energy. I make go-getters. You come to me and here's what I'll do: I'll take that body of yours and mould it into shape. I'll build out your shoulders, broaden your back, deepen your chest and put some honest muscle up and down your whole frame. I'll develop your biceps, your triceps, your deltoids and your dorsal. I'll strengthen every muscle in and around your vital organs. I'll expand your lung power so that you will breathe in deep draughts of oxygen, purifying your blood and shooting life throughout your entire system. I'll put pep in your old backbone. I'll put a spring into your step and snap into every movement. I'll clear your brain and brighten your eyes. You'll be just bubbling over with life and vitality. You'll feel on fire with enthusiasm. You'll want to shout to the world, "I'm a man and I can prove it!"

What do you say? Do you want to go on dragging yourself about, or do you want this big, robust life with a real man's body and power? Come on! Snap into it. Are you ready? Atta boy. Let's go.

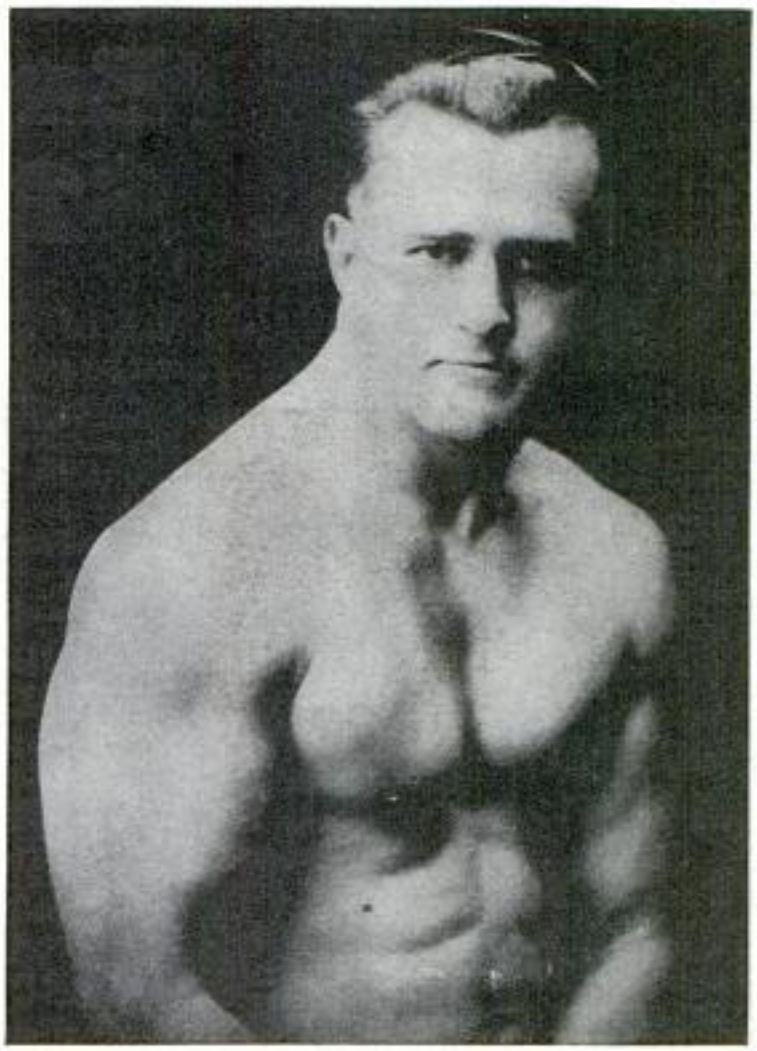

EARLE E. LIEDERMAN

Author of "Secrets of Strength," "Muscle Building," "Science of Wrestling," "Here's Health," etc.

Send For My New 64 Page Book "Muscular Development"

It Is FREE

It contains forty-five full page photographs of myself and some of the many prize-winning pupils I have trained. Many of these are leaders in their business professions today. I have not only given them a body of which to be proud, but made them better doctors, lawyers, merchants, etc. Some of these came to me as pitiful weaklings, imploring me to help them. Look them over now and you will marvel at their present physiques. This book will prove an impetus and a real inspiration to you. It will thrill you through and through. This will not cost you one penny. **I want you to have it with my compliments.** It is yours to keep. This will not obligate you at all, but for the sake of your future happiness and health, do not put it off. Send today—right now before you turn this page.

EARLE E. LIEDERMAN
Dept. 2007 305 Broadway New York City

It Is FREE

DON'T SEND ONE PENNY

YOUR NAME AND ADDRESS ON A POSTAL WILL DO

EARLE E. LIEDERMAN
Dept. 2007, 305 Broadway, New York City.

Dear Sir: Please send me, absolutely free and without any obligation on my part whatever, a copy of your latest book "Muscular Development."

Name.....

Street.....

City.....State.....
(Please write or print plainly)

Copyrighted material

If you want a job while training, I'll help get you one. Come to my big schools at Chicago or Detroit.

This Dental Laboratory Expert earns $20 a day!

What's the use of training for the old, overcrowded trades? If you're going to prepare for big-salaried jobs or a profitable business of your own GET INTO THE NEWEST PROFESSION—*"Laboratory Dentistry."* Biggest opportunity for success of the century, because there are ten times as many jobs as men to fill them, because there are a dozen cities crying for Laboratories for each EXPERT capable of operating one!

Easiest, pleasantest work you ever saw! Your own boss, money and success yours from the very beginning. You can start with a "shoe-string." We prepare you in a few months to run a business of your own, to do any job. Common schooling, ability to use your fingers ALL YOU NEED! Free R. R. Fare to Chicago or Detroit for a limited time!

60,000 DENTISTS NEED LABORATORY WORK!

Only a few hundred Laboratories in all the U. S.—most of them in Chicago and New York. Dentists can't afford to do their own mechanical jobs. They can buy the services of a Laboratory Expert at $3.00 an hour and sell their own time at $6 to $15 an hour. Dentists will encourage you to learn mechanical work, start a "Lab" of your own, give them quicker service than sending to Chicago or New York. Dentists can't wait and keep their patients waiting.

Jobs at $60 to $125 a Week!

In a business where there are many times as many jobs as Experts, salaries are high, hours are easy, opportunities are everywhere! McCarrie-trained Graduates always get the preference—Dentists everywhere recognize the high-standing of our graduates. No books here—learn with tools and instruments. Start quick—get ready in a few months for your big opportunity! *Mail Coupon today!*

FREE! R.R. Fare to Chicago

WE HELP YOU OPEN A LABORATORY OF YOUR OWN!

Many of my graduates open a Laboratory of their own. To encourage more men to go into this wonderful profession, we will help you find a good location for your Laboratory, and help you make a success of it. Write for complete information on how you can find yourself in a profitable business of your own after you become a Dental Laboratory Expert.

INTERESTING CATALOG—FREE!

Right this minute there are openings for 150 Dental Laboratory Experts in locations where they can do a business of $5,000 to $20,000 a year. But you can't *cash in*, take advantage of these OPPORTUNITIES until you're Trained. Catalog tells you how quickly and easily you can *get ready*, how hundreds of others have SUCCEEDED! Tells you how you learn in a few months BY DOING ACTUAL LABORATORY JOBS under one of the world's greatest Mechanical Dentists! Brings you FREE R. R. Fare offer and other big inducements. **Write for free Catalog today!**

McCarrie School of Mechanical Dentistry
1338 S. Michigan Ave.
Dept. 2301-G Chicago, Ill.

EARN while you LEARN!
Day students make all or part cost of course by part-time night work. Night students can find plenty of good jobs in Chicago "to see them thru." **We'll help you!**

RUBBER PLATES

Learn to make partial upper or lower plates with soldered, cast or wire clasps, with palatal bars; with lingual bars. McCarrie-trained Students learn to make full rubber plates of every type, including Vulcanite base-plates, butted gums, carved gums, etc.

CROWNS

Here's only a small part of your practical training in Crown-work: Two-piece, seamless, open-face, Richmond, cast-base porcelain, Carmichael, split-pin, carved (swaged) cusp, cast cusp, etc.

BRIDGE WORK

Complete training in both fixed and removable bridge-work. Interchangeable teeth, gold dummy, Sanitary, porcelain dummy jobs—Roach, Gilmore, Bischoff and all forms of cast-clasp work is taught—not with books but in *actual Laboratory.*

METAL BASE DENTURES

Cast bases of Aluminum, gold, Watt's metal, etc., are included in your training. Both centrifugal and air pressure casting machines are used. Free Catalog contains complete list of subjects in course.

McCarrie School of Mechanical Dentistry,
1338 S. Michigan Ave. Dept. 2301-G, Chicago, Ill.

Without obligation, please send me your *Free R. R. fare offer* and free catalog with complete information about how I may become a Dental Laboratory EXPERT. How you will help me open a Laboratory, how you will help me find a job while I take my training, etc.

Name.....

St. No. or R. F. D.....

City..... State.....

Copyrighted material

A. H. Ward, Chicago, Ill.

$12,000 a Year

A. H. Ward, Chicago, held a small pay job. Now he averages $12,000 a year as a salesman. Last month he cleaned up $1,350—and he stepped into this kind of earnings as a result of reading this book.

What This Amazing Book Did for These 8 Men

It would be just as easy to tell the same story about thousands of men, but what this book brought these eight men is typical. If you do not get a big salary increase after reading this message you have no one but yourself to blame. This amazing book is

NOW FREE

$1,000 in 30 Days

"After ten years in the railway mail service I decided to make a change. My earnings during the past thirty days were more than $1,000."—W. Hartle, Chicago, Ill.

First Month $1000

"The very first month I earned $1,000. I was formerly a farmhand."—Charles Berry, Winterset, Iowa.

$524 in Two Weeks

"I had never earned more than $60 a month. Last week I cleared $306 and this week $218."—Geo. W. Kearns, Oklahoma City.

City Salesman

"I want to tell you that the N. S. T. A. helped me to a good selling position with the Shaw-Walker Company."—Wm. W. Johnstone, Jr., S. Minneapolis, Minn.

$554.37 In One Week

"Last week my earnings amounted to $554.37; this week will go over $400."—F. Wynn, Portland, Ore.

$10,000 a Year

O. H. Malfroot, of Boston, Mass., stepped into a $10,000 position as a SALES MANAGER—so thorough is this training.

$100 a Week in Only 3 Months

H. D. Miller, of Chicago, made $100 a month as stenographer in July. In September, three months later, he was making $100 a week as a salesman.

IT seems such a simple thing—but the eight men on this page who did this simple thing were shown the way to quickly jump from deadly, monotonous routine work and miserable earnings to incomes running anywhere from $5,000 to $10,000 a year. They sent for the book, "Modern Salesmanship," that you can now get—free.

Possibly it is just as hard for you at this moment to see quick success ahead as it was for A. H. Ward of Chicago. When he was a soldier in France, wondering how he would make a living if he got back home safely, $10,000 a year seemed a million miles away. But read what happened after he had read the book we want you to send for. Almost overnight, as far as time is concerned, he was making real money. In one year he made $12,000.

There is nothing unusual about Mr. Ward, or about his success. Thousands after reading this book have duplicated what he did—Mr. Ward simply was willing to investigate.

The only question is — do you want to increase your earning power? If so—this book will quickly show you how to do it in an amazingly easy way.

SUCCESS INSIDE TWENTY WEEKS

Within twenty weeks you can be ready to forge ahead. This may sound remarkable—but after seventeen years of intensive investigation the National Demonstration Method has been perfected — and this means you can now step into a selling position in one-fourth the time it formerly took to prepare for this greatest of all money-making professions.

SIMPLE AS A B C

There is nothing remarkable about the success that men enjoy shortly after they take up this result-securing system of Salesmanship training. For there are certain ways to approach different types of prospects, certain ways to stimulate keen interest—certain ways to overcome objections, batter down prejudice, outwit competition and make the prospect act. Learn these secrets and brilliant success awaits you in the selling field.

MAKE THIS FREE TEST AT ONCE

Simply send the coupon for this Free Book. Ask yourself the questions it contains. The answers you make will show you definitely whether a big success awaits you in this fascinating field. Then the road is clear before you. This amazing book will be a revelation to you.

National Salesmen's Training Association
Dept. H-12
N. S. T. A. Building
Chicago, Ill.

WORLD'S OLDEST AND LARGEST SALESMANSHIP TRAINING INSTITUTION
NATIONAL SALESMEN'S TRAINING ASSOCIATION

National Salesmen's Training Ass'n,
Dept. H-12, N. S. T. A. Building
Chicago, Ill.

Gentlemen: I will accept a copy of "Modern Salesmanship" with the understanding that it is sent me free.

Name.....

Address.....

City.....State.....

Age.....Occupation.....

Copyrighted material

LEARN DRAFTING

I'll put you in line for this man's job

C. E. Wesch, Chief of Staff

Get into the Easiest, Most Fascinating Work in the World!

If you're earning a cent less than $50 a week, clip coupon *now!* Send for *Free Book*. LEARN DRAFTING. Positions everywhere. Short hours. Big Pay. Wonderful Opportunities. Draftsmen are in contact with BIG MEN—is line for promotion—BIG PAY. Amazing Careers built on Drafting.

Practical Training from Practical Engineers

Get that Free Book. Find out about this Thorough, Easy, Simplified, Money-making Training. Common schooling all you need. We guarantee to train you successfully—AT HOME, with actual Drafting Jobs. Also Professional Instruments FREE! Personal and Individual Lifetime Consultation Service FREE to you. Famous "Job Method," not narrow, one-man viewpoint. FREE EMPLOYMENT SERVICE. Powerful Association backs you up. DRAFTSMAN'S Outfit FREE—Many other big features special for limited time. Act Now!

GET THIS FREE BOOK NOW!

Start to make money quick, like P. Novak of Freeland, Pa. He says, "I was a laborer at $4.50 for ten hours. NOW it's $10 for 8 hours. Easy Work. You did it for me."

CLIP COUPON FOR SPECIAL 2 FREE OUTFITS OFFER!

ASSOCIATED DRAFTING ENGINEERS
The celebrated "Job Method" Training Institution
1920 Sunnyside Ave., Chicago

MAIL THIS COUPON!

FREE DRAFTING BOOK!

Address Me Personally, C. E. WESCH, Chief of Staff.
ASSOCIATED DRAFTING ENGINEERS,
The celebrated "Job Method" Training Institution
1920 Sunnyside Ave., Dept. B19, Chicago, Ill.

We have taken over the famous old Coyne School of Drafting.

Without obligating me in any way, please send me your book, "Drafting, the Foundation of Industry" absolutely free. Also complete Information of your home-study Drafting course, 2 FREE OUTFITS and Special Offer.

Name.....

Address.....

Town.....State.....

Occupation.....

Do Your Friends Marvel

at your physique as it stands today? Do they talk about you as the strongest man in the neighborhood? Most likely they do not, but if you had only enrolled with me three months ago, you would now be the talk of your friends and relatives.

This popularity would be brought about by the harvest you would now be reaping of better health; an overflow of pep and endurance; strength that would make you a leader, even among real men; a physique that would make your friends worship you and your enemies respect you; joints and muscles that would be so supple your body would possess the greatest possible agility. And besides these you would have learned in these three short months more about your body and its needs; more about exercise and physical culture in general than you ever have in any past six months or will in the same length of time in the future.

HOW WOULD A 15-INCH UPPER ARM LOOK

In place of that frail one you now possess? How would it look as good, solid muscle instead of flabby fat? You can imagine how it would look, with other measurements in proportion, because you surely know that a 15-inch upper arm is some arm. Yes, you can imagine how it would look, but you can never get it on there with imagination. So satisfy yourself that you must "make a break," "take the step"—anything for a start. That is it—get started. But just as important as starting—is the matter of starting right.

Actual Exercise, Muscle Control, Tumbling and Hand Balancing are Given You in My Free Book

The title of this ABSOLUTELY FREE BOOK is, "The Royal Road to Health and Strength." It shows you how to actually perform more worth-while feats than any other book of its kind, besides clearly explaining my Physical Training Methods. Furthermore, it is full of half-tone pictures showing my own physique, as well as a great number of my magnificently developed pupils. There are sixty-four pages of magnificent pictures and desirable instructions for you FREE. DON'T even send a dime for mailing charges.

You'll Enjoy This Book — So Write For It Now

CHARLES MacMAHON Studio D-14, 180 W. Somerset St. PHILADELPHIA, PA.

Learn to Mount Birds

Learn **at home by mail,** to mount **birds, animals, game heads; tan furs, make rugs and robes.** Complete lessons. Easily and quickly learned by men, boys and women.

FREE Write today for **Free Taxidermy Book.** Tells all about it. Every Sportsman, Hunter, Trapper and Nature lover **should** know this wonderful fascinating art. Save your trophies. Big profits. Success guaranteed. Our school is 20 years old—16,000 graduates. Investigate today. Write for Free Book.

Northwestern School of Taxidermy B177 Elwood Bldg., Omaha, Neb.

FREE

$20 Fine Tone *Musical Instruments*

We have a wonderful new copyrighted system of teaching note music by mail. To every pupil taking the course we will give free a $20 superb Violin, Tenor Banjo, Ukulele, Hawaiian-Guitar, Banjo, Mandolin, Banjo-Ukulele, Banjo-Mandolin, Cornet or Banjo-Guitar absolutely free. Also teach Piano and Organ. Very small charge for lessons only. Four lessons will teach you several pieces. Over 100,000 successful players. We guarantee success or no charge. Complete outfit free. Write today. Dept. 214. No obligation.

Stingerland School of Music, Lincoln Park P. O., Chicago, Ill.

Stop Forgetting

Make Your Mind an index from which you select facts, figures, names, faces. Develop concentration, self-control; overcome bashfulness, forgetfulness.

Write today for FREE memory and concentration test and illustrated booklet, "How to Remember."

PROF. HENRY DICKSON
Dept. 7057 Evanston, Ill.

Learn Watchwork, Jewelrywork and Engraving.

A fine trade commanding a good salary, and your services are always in demand. Address **Horological,** Dept. P, Bradley Institute, PEORIA, ILL., for our latest catalog.

Learn Photography at HOME

Earn $3000 to $10,000 a year. Prepare quickly during spare time. Also earn while you learn. New easy method. Nothing else like it. Send at once for free book, "Opportunities in Modern Photography" and full particulars. Special offer now open.
INTERNATIONAL STUDIOS, Dept. 1358, 3601 Michigan Ave., Chicago, U. S. A.

Copyrighted material

Take off your brakes

Why hold yourself back? There's a big future for you in the Auto business.

Earn Up to $125 Per Week

Take off the brakes. Step on the gas with

GREER Training

Come on, fella. Don't be a piker. Give yourself a **chance** to make good in a big way. This training will only take you

8 to 12 Weeks

This is the greatest business in the world. The demand for trained men is increasing every day, in every branch of auto, truck and tractor work. With Greer training you'll find yourself **sitting on the world.**

Of course there are different ways of going at this business. One way is to be an apprentice or a flunkey half your life. But **Greer College** has the time-proven method for quick and effective training. It's one of the oldest Automotive institutions in the world. It has grown steadily for 23 years, keeping pace with the rise of the Auto business step by step.

Greer College represents the life work of its founder, Mr. Erwin Greer; and its system of training is the result of Mr. Greer's experience of many years. You learn by actual **doing**, but under a system of supervision peculiar to Greer College. The remarkable thing about it is that an institution so large still can keep the personal touch,—the helpful relationship of instructor and student which means so much. No matter if you do not know a spark plug from a tail light. You'll start right at the beginning and you'll find such a zest in your work that nothing can hold you back.

The whole Greer course is planned so interestingly and so effectively that you'll simply "eat it up." No time wasted in unnecessary things, but whatever is necessary you'll get—and get **right**. That's why big employers specify Greer-trained men. Our men know what they're about and they get the cream of the jobs in every branch of auto, truck and tractor work. Our course fits you to be a Repairman, Mechanic, Salesman, Garage Manager or Owner, Battery Man, Automotive Electrician, Truck and Tractor Man, Tire Repairman or Chauffeur.

FREE EMPLOYMENT SERVICE

Our employment department is in touch with the best jobs at all times, and will help you get placed where you fit the best. If you need extra money while training, let us help you arrange a part time job. Day and evening classes.

You will enjoy these few weeks of training immensely. Greer College is ideally situated for getting into the spirit of the auto business. Within 10 blocks there are over 40 auto sales agencies. There are over 5000 public garages in the city. Moreover, Chicago is ideal in summer and you will find time to enjoy the beaches and some big league baseball. Best of all you'll get that big job in the early Fall—with **big pay** and a **real future.** Mail this coupon **now.**

Here is our 7 story building, the home of Greer College.

Up-to-date in every way, with finest of equipment

Write for this free book today. Use this coupon. Address me personally.

ERWIN GREER,
President.

ERWIN GREER
President
Dept. 701
2024 S. Wabash Avenue,
CHICAGO, ILL.

Please send me FREE BOOK, "How to Succeed in the Automobile and Tractor Business," and special training offer. This request does not obligate me in any way.

Name.....

Address.....

.....

GREER COLLEGE
Automotive Engineering

Dept. 701

2024 South Wabash Avenue **CHICAGO**

Copyrighted material

The only man who could talk to the Superintendent

"SOON after I began studying," a student wrote to us the other day, "we had a change in management at our plant. I certainly was glad then that I had decided to study in my spare time. For, thanks to my I. C. S. course, I was the only man in the organization who could talk to the Superintendent in his own language. As a result, I was promoted over men who had been here from ten to twenty years. My salary has been increased 90% in the last ten months."

THAT'S a true story of what just one I. C. S. student has done. There are thousands of others. Every mail brings letters from men and women telling of promotions and increases in salary due directly to spare-time study.

One hour a day, spent with the I. C. S. in the quiet of your own home, will prepare you for success in the work you like best. *Yes, it will!* Put it up to us to prove it.

Mail the Coupon for Free Booklet

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 5521-E, Scranton, Penna.

Without cost or obligation, please tell me how I can qualify for the position or in the subject *before* which I have marked an X:

BUSINESS TRAINING COURSES

☐ Business Management	☐ Salesmanship
☐ Industrial Management	☐ Advertising
☐ Personnel Organization	☐ Better Letters
☐ Traffic Management	☐ Show Card Lettering
☐ Business Law	☐ Stenography and Typing
☐ Banking and Banking Law	☐ Business English
☐ Accountancy (including C.P.A.)	☐ Civil Service
☐ Nicholson Cost Accounting	☐ Railway Mail Clerk
☐ Bookkeeping	☐ Common School Subjects
☐ Private Secretary	☐ High School Subjects
☐ Spanish ☐ French	☐ Illustrating ☐ Cartooning

TECHNICAL AND INDUSTRIAL COURSES

☐ Electrical Engineering	☐ Architect
☐ Electric Lighting	☐ Architects' Blue Prints
☐ Mechanical Engineer	☐ Contractor and Builder
☐ Mechanical Draftsman	☐ Architectural Draftsman
☐ Machine Shop Practice	☐ Concrete Builder
☐ Railroad Positions	☐ Structural Engineer
☐ Gas Engine Operating	☐ Chemistry ☐ Pharmacy
☐ Civil Engineer	☐ Automobile Work
☐ Surveying and Mapping	☐ Airplane Engines
☐ Metallurgy	☐ Navigation
☐ Steam Engineering	☐ Agriculture and Poultry
☐ Radio	☐ Mathematics

Name.....

Street Address..... 3-6-24

City..... State.....

Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

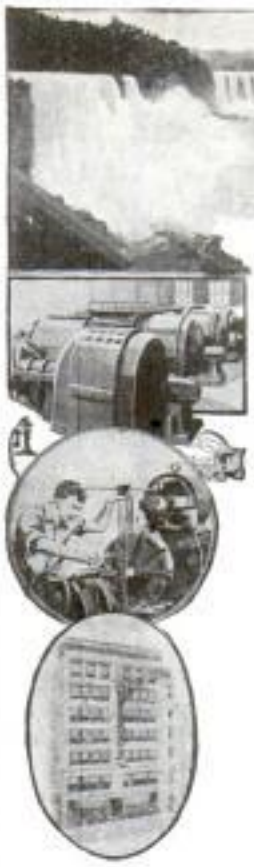

LEARN BY DOING

Every phase of all branches of

ELECTRICITY

taught by

Actual Practice

In America's foremost institution for trade training

No Books Used

Individual Instruction
Start Any Day

Write for FREE 64-page catalog

THE NEW YORK ELECTRICAL SCHOOL

44 West 17th St., New York City

Open All Summer

ARTIST'S OUTFIT FREE

Write quick for our remarkable offer. Learn **NOW** at home, in spare time, by our new instruction method. Commercial Art, Cartooning, Illustrating, Designing. Delightful, fascinating work in big demand. **$50.00** paid for one drawing. Handsome book free explains everything.

SEND FOR IT TODAY

WASHINGTON SCHOOL OF ART, Inc.
Room 307-C 1115-15th St. N. W.
Washington, D. C.

PIANO JAZZ

By Note or Ear. With or without music. Short Course. Adult beginners taught by mail. No teacher required. Self-instruction Course for Advanced Pianists. Learn 259 styles of Bass, 684 Syncopated Effects, Blue Harmony, Oriental, Chime, Movie and Café Jazz, Trick Endings, Clever Breaks, Space Fillers, Sax Slurs, Triple Bass, Wicked Harmony, Blue Obligato, and 247 other Subjects, including Ear Playing. 133 pages of REAL Jazz, 25,000 words. A Postal brings our FREE Special Offer.

Waterman Piano School, 1826 W. Adams St. Los Angeles, Cal.

Learn Advertising at HOME

The highest paid men in the world are advertising men. You can learn easily and quickly at home during your spare time. Bigger opportunities now in advertising than ever before. Tremendous demand for our graduates at big pay.

Send for FREE Book. Giving interesting information and vital facts—just what you want to know about advertising. Write today!

PAGE-DAVIS SCHOOL OF ADVERTISING
Dept. 135 B 3601 Michigan Ave., Chicago, U. S. A.

Great New Invention

For Seekers of Health—Power—Beauty

Generate **High Frequency Violet Ray, Mechanical Vibration, Medical Electricity** and **Ozone**—the four greatest curative agents. Combined or separate. They operate on the electric light in your home or on their own motive power at less than 50 cents per year.

WRITE Ask for the book on these inventions which has just been prepared. It will be sent to you without cost. Re-vita-lize yourself. Bring back energy. Be wholly alive. WRITE TODAY!

Lindstrom & Co., 30 W. Lake St., Dept. B-135, Chicago

Copyrighted material

YOU CAN PLAY THIS *Professional Style* HAWAIIAN GUITAR JUST LIKE THE HAWAIIANS!

FREE! THIS $15.00 GENUINE HAWAIIAN GUITAR

BECAUSE OUR NATIVE HAWAIIAN INSTRUCTORS WILL SHOW YOU HOW!

Be the Most Popular Member of your Set. Play "What'll I Do", "So This Is Love", "Memory Lane", "Minding My Business", "Fair Lady", "Lazy", "Linger Awhile". All the late song and dance hits. You can play First Selection **in Half an Hour** and Harmonious Chords at ONCE. Entertain your friends. Play for money. Don't be a wallflower. **Be the Life of the Party.**

FAMOUS HAWAIIANS TEACH YOU TO MASTER QUICKLY THEIR SECRETS OF THIS FASCINATING MUSIC

The instructions you receive from such world famous experts as Lawrence Kalaluki, Walter Kolomoku, Frank Ferera, Carl Seville and others are invaluable. NO OTHER Conservatory can *even begin* to give you the **expert teaching** and knowledge you gain through us. And remember, while it is conceded that the Hawaiian Guitar produces the **sweetest music,** yet its mastery by you will be simple and quick. We guarantee it

ONLY 4 EASY MOTIONS—to learn to be able to play any music, popular, dance, classical, native Hawaiian Airs or old time melodies and hymns. Just think of it! You need never have read a musical note in your life. For that matter, **even though you haven't the slightest knowledge of any musical instrument,** we guarantee to teach you to play just like the native Hawaiians.

NEW INVENTION MAKES IT EASY

Here is your chance to learn to play the most fascinating of all instruments, the Hawaiian Guitar, JUST AS THE HAWAIIANS DO, and in an amazingly short time. **Our method is so simple, plain and easy** that you begin a piece your first lesson. In half an hour you can play it! Thousands of successful students prove this to be true. No matter how little your knowledge of music may be, **you can positively learn to play** by our plain, easy picture method.

COMPLETE CONSERVATORY COURSE

You get 52 complete lessons. An entire conservatory course. Nothing is omitted. **Success is assured.** It is the best course of Hawaiian guitar lessons in the entire world. Real Hawaiians instruct you. This is the only Conservatory teaching Hawaiian Guitar exactly as played by the Hawaiians. It is **your good fortune** as well as ours, that these Native Masters of Hawaiian Guitar come to this Conservatory to teach. That is why we are the largest and the best known Conservatory of the kind. Your success is assured when you enroll.

ANYONE CAN PLAY

We guarantee it. 40,000 pupils prove it. You don't have to know music. Our picture method makes it easy. Don't be afraid to try it.

WE FURNISH YOU With EVERYTHING

When you enroll as a student in this conservatory, you receive FREE a handsome, sweet toned, Genuine Hawaiian Guitar—valued at $15.00—52 especially arranged lessons, as well as all the necessary Picks, Steel Playing Bar, etc. There is NOTHING extra to buy; everything is furnished.

EXTRA! As a special offer to readers of this magazine, we supply 52 pieces of music as a part of the course of lessons. Study the pictures of the good times you can have at parties, etc. **Get in on the fun.** Don't pass up this chance. Send the coupon at once for information and proof.

FIRST HAWAIIAN CONSERVATORY OF MUSIC
Dept. 48, 233 Broadway (Woolworth Bldg.) New York, N.Y.

SPECIAL COURSES UNDER FAMOUS TEACHERS, TENOR BANJO, VIOLIN, BANJO-UKULELE AND UKULELE

THIS COUPON MAKES IT EASY

WORTH $15.00

Yes, that is the price charged in the music stores for these beautiful Hawaiian Guitars. We can afford to give them away free of charge to every pupil because we manufacture them in huge quantities in our own factory, which is the largest stringed instrument factory in the world.

SWEET TONED

You will get the same haunting, soothing, plaintive fascinating tunes that the real native Hawaiians get on these same instruments. Plays any kind of music. 40,000 satisfied pupils prove all our claims are true.

Yours Free! We mean it. There are no strings tied to this generous offer. You get it absolutely free as soon as you enroll for our course of 52 easy lessons, taught by real Hawaiians. You can't possibly lose, so mail the coupon at once for full information.

Be Popular You'll never be lonesome after you learn to play on this beautiful Hawaiian Guitar. You can be the life of the party. Don't be a wallflower. Use the coupon for complete information. Mail it right away.

TEAR OUT AND MAIL

FIRST HAWAIIAN CONSERVATORY OF MUSIC, Inc.
Dept. 48, 233 B'way, Woolworth Bldg., New York, N.Y.

Gentlemen: Of course I want to get this handsome $15.00 Hawaiian Guitar free of charge, because I am interested in learning to play it. Please mail full information about your 52 easy lessons under real Hawaiians, and proof that I can play a piece after the first lesson. I am not obliged to enroll unless I want to.

Name.....

Local Address.....

City & State.....

Copyrighted material

BLISS ELECTRICAL SCHOOL

A special technical school with concise but comprehensive course in Electrical Engineering. Non-essentials eliminated. Thorough knowledge of underlying principles emphasized. Theory and practice closely interwoven.

Electrical Engineering in One Year

The course is designed for earnest, ambitious young men of limited time and means. Curriculum includes mathematics, mechanical drawing and intensive shop work. Students construct motors, install wiring, test electrical machines. Graduates are qualified to enter the electrical field at once.

Bliss men hold responsible positions throughout the world. Thoroughly equipped fireproof dormitories, dining hall, laboratories and shops. **Prepare for your profession in the most interesting city in the world.** Established 1893. Send for catalog. Address

BLISS ELECTRICAL SCHOOL 217 Takoma Avenue Washington, D. C.

DO YOU LIKE TO DRAW?

It's Easy To Learn When Shown In The Right Way

Some of cleverest cartoonists and comic artists in America today learned how to draw quickly—by following CARTOONIST EVANS' SIMPLE AND EASY METHOD. This school is recommended by foremost cartoonists because they know the students are handled right. If you like to draw, send 6c in stamps for **portfolio of cartoons** and **full details.** The course is NOT EXPENSIVE.

The W. L. Evans School of Cartooning 821 Leader Building CLEVELAND, OHIO

"THERE'S MONEY IN IT"

AT HOME LEARN TELEGRAPHY AT HOME
MORSE AND WIRELESS

TEACH YOURSELF in half usual time, at trifling cost, with the wonderful Automatic Transmitter, **THE OMNIGRAPH.** Sends unlimited Morse or Continental messages, at any speed, just as an expert operator would. **Adopted by U. S. Government, and leading Universities, Colleges and Telegraph Schools. 3 Styles. Catalog free.** OMNIGRAPH MFG. CO., 13-19 Hudson St., NEW YORK

If you own a Radio Phone Set—and don't know the code—you are missing most of the fun.

LAW
STUDY AT HOME

Become a lawyer. Legally trained men win the highest positions and biggest success in business and public life. Be independent. Greater opportunities now than ever before. Big corporations are headed by men with legal training. Earn

$5,000 to $10,000 Annually

We guide you step by step. You can train at home during spare time. Degree of LL. B. conferred. LaSalle students practicing law in every state. We furnish all text material, including fourteen-volume Law Library, "Law Guide" and "Evidence" books free. Send for them NOW. Low cost, easy terms. Get our valuable 108-page

LaSalle Extension University, Dept. 764-L, Chicago
The World's Largest Business Training Institution

SHORTHAND IN ONE MONTH

Boyd—the Wonderful, New, Easy System. Writers hold World's record. 100 to 150 words a minute in 30 days guaranteed. New Principles—dictation first week. Best for Court Reporting and Secretaries. Also Typewriting, Bookkeeping and Commercial Law. Send today for Catalog and Money-Back Guarantee.

CHICAGO HOME STUDY SCHOOLS, 802 Reaper Block, CHICAGO, ILLINOIS

WANTED—RAILWAY MAIL CLERKS

$1900 to $2700 a Year for Life

(ALL POSTAL PAY JUST RAISED)

Every second week off with full pay—no "lay-offs" because of strikes, poor business, etc.—sure pay—rapid advancement to higher positions. City and country residents stand same chance. Common sense education sufficient—no political influence.

TRAVEL—SEE YOUR COUNTRY
DON'T DELAY—ACT AT ONCE

Mail Coupon today—sure. Every day's delay means so much less chance of appointment from the next examinations—so write at once.

FRANKLIN INSTITUTE, Dept. E-177, ROCHESTER, N. Y.

Take this First Step for a U. S. Government Job

Use Coupon Before You Lose It

COUPON

FRANKLIN INSTITUTE, Dept. E-177, Rochester, N. Y.
Kindly send me, entirely free of charge, (1) A full description of the position checked below; (2) Sample examination questions; (3) Free Sample Coaching; (4) A list of U. S. Government Jobs now obtainable; (5) Tell me how to get the position here checked.

...Railway Mail Clerk ($1900 to $2700) ...Customs Positions ($1140 to $1860)
...Postoffice Clerk ($1700 to $2100) ...Internal Revenue ($1140 to $1860)
...City Mail Carrier ($1700 to $2100) ...Rural Mail Carrier ($2100 to $3300)
...Income Tax Auditors ($2040 to $3000)

Name .....

.....

Copyrighted material

Learn

Aviation

At Home in your spare time.
Be an expert Airplane Engineer.

Earn $3,500 to $10,000 a Year

Practical course — takes only a few months. Write for special offer on free airplane parts and free catalog.

WESTERN AIRPLANE CORPORATION
Dept. M7 Monadnock Block CHICAGO

$100 a Week For CARTOONS

Get into This Attractive Fast-Growing Field Now

Learn to Draw Cartoons at Home

A wonderfully simple method makes it amazingly easy to become a professional cartoonist right at home in a few minutes' daily spare time. Enjoy easy hours—freedom from routine—and make $100 a week or more. Write for Free Book which tells all about this easy method. Mail card today.

WASHINGTON SCHOOL OF CARTOONING
Room 307C, 1113-15th St., N. W., Washington, D. C.

LEARN Penmanship

I can teach you Penmanship by mail during your spare time. Fifteen years of experience proves my ability. Good penmanship secures positions and increases salaries. Free book, "*How to Become An Expert Penman*," which explains my Method. I will write your name elegantly on a card if you enclose stamp to pay postage. Write today.

T. M. TEVIS Box 25-M CHILLICOTHE, MO., U. S. A.

LEARN VIOLIN NEW EASY WAY!

VIOLIN FURNISHED! Marvelous new Master Method teaches you by mail in ½ time and at 1-50th cost. No numbers or trick music. Play a real piece by note in fifth lesson. Easy as A B C. Diploma awarded. Beginners or advanced players. Money back guarantee. Send today for free booklet. Will be sent in plain wrapper. Write plainly. **MASTER VIOLIN SCHOOL, 51 E. 42nd St., Conv. 704, New York, N. Y.**

LEARN TO PITCH

Lessons by "MATTY," WALSH, WHITE, JOHNSON, RUCKER, WOOD — **PITCH THE FADE-A-WAY, SPITTER, KNUCKLER, SMOKE BALL, etc.**, clearly described and illustrated by 56 Pictures. Entire COURSE OF LESSONS sent p. p. for **25c.**

J. C. DORN, 721 S. Dearborn St., Dept. 65, Chicago, Ill.

ZIP-ZIP

THOUSANDS of boys are made happy with this wonderful Zip-Zip shooter, something every boy wants and never gets tired of. Zip-Zip shooter is scientifically and practically made; boys, if you like hunting and outdoor sports, get a Zip-Zip shooter with plenty of pep and force and learn that quick and sure aim. If your dealer happens not to have them, order from us. Zip-Zip shooter complete 35c or three for $1.00; send stamps, coin or money order.

AUTOMATIC RUBBER CO., Dept. 44, Columbia, S. C.

HIT BACK

By BENNY LEONARD,
Undefeated Lightweight Champion of the World

IF FATE has jabbed you in the solar plexus—**HIT BACK.** If Nature has been unkind to you, has laid you low with sickness or cursed you with a frail weak body—**HIT BACK.**

Are you content to lie down like a yellow dog and whimper, just because you were not born with a strong physique, with big muscles, broad chest, brawny limbs? Are you satisfied to go shuffling wearily to your work, with run down, half-dead body? Are you willing to admit defeat—to allow your unfitness to keep you forever **down** and **out**, just struggling for a bare existence—scorned by your boss, a disgrace and a hindrance to your wife and family and shunned by society wherever you go? If you are, then you are doomed to misery and failure. You are destroying your chances for **WEALTH, HAPPINESS, SUCCESS.**

My message to you is—Snap out of it, old man. **HIT BACK!**

I can tell you of no better example of this reasoning than my own life. I was a skinny, frail youngster. They called me the "powder puff kid." But I didn't accept that as my fate. My climb to the highest rung of physical supremacy—**the championship of the world**—was begun the day I decided to **HIT BACK.**

From that day to this I haven't stopped **hitting back.**

And here is the way I've done it. By scientifically studying the human body and actually working out the theories with my very own body, I have perfected a method of physical development that has proven a real knock-out blow to friend Satan, the old boy who plans all our misfortunes and physical shortcomings.

Through my system, I have licked every competitor in sight. So many people wrote and asked how they might use my methods—and so many did adopt them with such great success that I am now devoting practically all my time to spreading my invaluable lessons in muscle and body building to all the people I can possibly reach by letters.

If you want the very last word in physical culture, if you do not believe in old fogey ideas, if you wish to adopt the best methods of **this day, of 1925**, if you want to gain the love and respect of women, if you want to make good in your job and reach the top in whatever you hold nearest your heart, then there is only one way, my friend, and that is **HIT BACK—HIT BACK** like

Yours with a punch,

Send for my FREE Booklet full of interesting reading. No obligation.

Benny Leonard

discoverer and conductor of the famous
BENNY LEONARD HOME COURSE OF MUSCLE AND BODY BUILDING
123 West 31st St., New York City

MAIL THIS COUPON NOW

BENNY LEONARD
G P O Box 474 [Dept. 111] New York, N. Y.

Sounds to me that your booklet, entitled "Now I Can Tell You" must contain some mighty interesting reading matter. Will you please send me a copy? I enclose 10c [either stamps or coin] to help cover costs of getting this book out and sending it. There's no obligation.

Name.....
Street.....
City..... State.....

Copyrighted material

FREE Trial!

In your own home—

Become a crack Xylorimba player right in your own home. Easiest instrument to play. Everyone enjoys it—anyone can learn to play it. We furnish you free 14 complete lessons. Learn to play in a few hours. Earn $80.00 to $200.00 a week. Deagan instruments are world-renowned—used extensively in leading dance, theatre and concert orchestras, and for Radio Broadcasting. Yet, the cost of the Deagan Xylorimba is no greater than the cost of any other good instrument.

DEAGAN XYLORIMBA

With this instrument you can play either for profit or for fun. Deagan instruments furnish the "spice" of the music. Used exclusively in recording studios for phonograph records.

Free Lessons—A Year to Pay

Our free trial and easy payment plan make it easy to learn at home. Send coupon below for illustrated literature and details of our special free trial offer.

SEND THIS COUPON

J. C. DEAGAN, Inc., Dept. B-135
Berteau and Ravenswood Avenues, Chicago, Ill.

Gentlemen: Without obligation, please send me literature and full information regarding your Free Trial Deagan Xylorimba offer.

Name .....

Address .....

.....

1,000 Hotel Positions Open!

HOTELS, restaurants, clubs, apartments, everywhere need trained men and women. Over 70,000 high-class positions paying up to $10,000 a year are open each year in the hotels of the United States. In 1924 the Hotel Business was America's largest industry in new construction. Nearly a billion dollars worth of NEW HOTELS AND RESTAURANTS being built this year will need over 60,000 trained men and women. Hotels start you at salaries up to $3500 a year, with your living. At any time you have your choice of over 1,000 hotel positions open.

You can have one of these high-class big-pay positions, with luxurious apartment and meals and fascinating work. No previous experience necessary. The Lewis Schools guarantee to give you the valuable knowledge that it has taken some of the most successful hotel men years to obtain—men who are now making $5,000 to $50,000 a year. We train you by mail in your spare time at home with the Lewis Simplified Study Plan, and put you in touch with big opportunities. Our students employed, our methods endorsed by leading hotel men everywhere.

Send today for FREE BOOK, "*YOUR BIG OPPORTUNITY*," showing how we can train you for one of these splendid positions in 20 weeks or less, and explaining our Money-Back Guarantee.

LEWIS HOTEL TRAINING SCHOOLS
Clifford Lewis, Pres.

Room T-385 Washington, D. C.

FREE BOOK COUPON

LEWIS HOTEL TRAINING SCHOOLS, Room T-385, Washington, D. C.
Send me without obligation the Free Book "YOUR BIG OPPORTUNITY."

Name.....
(Please Print)

Address.....

City.....State.....

Build a Boat

How to Make 21 Kinds

If you want a boat, you can save several dollars by making it yourself. Or you can pick up money on the side making boats for your friends. Besides **you'll have barrels of fun.** Everything is made so simple and easy in Popular Mechanics amazing Boat Book. Complete and simple directions and necessary illustrations for building these boats and canoes:

Fast runabout motor boat, Canadian model canoe, Open sailing canoe, Portable folding boat, Motor canoe, Peterborough canoe, canvas-covered cedar canoe, Hydroplane catamaran, Cruising catamaran, Paper boat, Long Island Scooter, Paddle-wheel boat, Log canoe, House boat and camp, Sea gull sail boat, Pile-driver punt, Inexpensive motor boat, Steel boat, Concrete boat, Bicycle boat, and Power-driven catamaran.

This wonderful book, together with its companion, Outdoor Sports (containing hundreds of practical plans and ideas on sports, games, tours and camping) will be sent to you on approval if you write a postal for them.

Send No Money

Just send a note saying you want the Boat Book and Outdoor Sports. When they arrive, pay postman only $1.45 plus a few cents postage. If you are not more than satisfied, simply return the books and your money will be refunded at once.

POPULAR MECHANICS PRESS
707 Popular Mechanics Bldg., CHICAGO, ILL.

Build Your Own Boat

Automobile Repairman's Handbook

The latest addition to Popular Mechanics fast selling 50 cent handbooks.

Contains 334 ideas for those who repair automobiles. All practical plans discovered by practical mechanics. 337 illustrations. 40 ideas on valves, 16 ideas for special tools, 26 ideas on bearings and bushings, 21 ideas on pistons and piston rings, 15 ideas on cylinders and cylinder heads, 10 ideas on fender and body repairs, 12 ideas on carburetor and vacuum tank, and definite suggestions for repairing the other parts of all makes of cars. Fully indexed. Send 50 cents to

POPULAR MECHANICS PRESS
Room 707 Popular Mechanics Building Chicago, Ill.

Automobile Tourist's Handbook

Tells how to keep food cool and free from dust while on the road; how to provide sleeping quarters inside the car; how to provide plenty of room for baggage; how to avoid car trouble on the road; how to build a combination bed and luggage carrier; how to cook food without carrying a big stove; how to make tents, cots, and stools, how to build a radio set for touring, and dozens of other practical articles needed when you are on a trip. 96 pages, thoroughly illustrated.

50c

POPULAR MECHANICS PRESS
Room 707, Popular Mechanics Bldg., CHICAGO, ILL.

Copyrighted material

YOU Can Be a Dental Laboratory Expert

Make $150 a Week

BOTH MEN AND WOMEN IN DEMAND
PERSONAL INSTRUCTION to Each Student

In **One** Complete School for Mechanical Dentists. Students are taught on Patients' work that is actually used. **Only Modern Methods Taught.** 50,000 Dentists need **Laboratory Experts.**

Stivison Trained Graduates Always in Demand. Jobs Hunt You. Every Dentist does Laboratory Work that he would gladly have done by an expert and pay Big Prices.

Real Dentist's Tools are furnished and Instructions given by **Real Dentists** on work that Dentists need. Descriptive Literature Free. **We pay your R. R. Fare** to Kansas City and assist you in paying your tuition. Earn while you learn.

GET IN THE BIG PAY CLASS

Write for Special Offer. Delay may cost you a good job and lots of money.

Stivison Dental Institute 11th and Locust Sts. KANSAS CITY, MO.

LEARN ENGINEERING

Great Demand for Practical-Technical Engineers. Big Salaries. Wonderful Opportunities. Thousands of our graduates holding responsible high-salaried positions. Practical-Technical Courses from 3 Months to 2 Years in Electrical and Mechanical Engineering. Simple and Condensed Method. Faculty of Trained Experts. New Building. Extensively Equipped Laboratories and Shops. Department of Architecture. Structural and Mechanical Drafting. Degrees Awarded. Students assisted to positions. Day and Night Sessions. **23rd year begins Sept. 15. Catalog D FREE.**

FINLAY ENGINEERING COLLEGE, Kansas City, Mo.

$100.00 EARNED BY YOUNG ARTIST IN 2 DAYS

Well-trained artists earn splendid incomes. The Federal home-study Course is a proven result-getter. If you like to draw, send 6c in stamps for 56-page book "Your Future." **State your age and present occupation.**

FEDERAL SCHOOL OF COM'L DESIGNING
606 Federal Schools Building
Minneapolis, Minn.

Wonderful, new device, guides your hand; corrects your writing in few days. Big improvement in three hours. No failures. **Complete outline FREE.** Write C. J. Ozment, D-34, St. Louis, Mo.

Start Little Mail Order Business—Free Book

Home employment evenings. Beginners Outfit furnished. **Book Free. Pier, 842 Cortland St., NEW YORK**

Learn RADIO At Home-By Mail

$3,000 to $10,000 a year. How to build, repair, install, sell radios now, quickly learned. Simple, easy home-study plan. 1000-mile set free with course. Low cost, easy terms. Send now for free big book on radio opportunities.

RADIO ASSOCIATION OF AMERICA
4513 Ravenswood Ave., Dept. A-7, Chicago, Ill.

FREE Electrical Training Book

Mail postcard for amazing FREE book on electricity. Shows you how to earn $150 to $600 a month in this immense field. Famous S & H shop-type training fits you quick at home for big jobs. Exclusive system. Lack of experience or education no bar. **Write**

S & H Engineering Co., 1422 W. Monroe St., Dept. G-1, Chicago, Ill.

CHICAGO TECHNICAL COLLEGE

Drafting Engineering Electricity and Architecture

22nd Year

A MAXIMUM of practical training in a minimum of time is offered you by one of **"America's oldest and largest schools of specialized engineering"** . . . technical training of college standard for men who have neither the time, money nor preliminary education to attend a university. Over 1000 men enroll each year in day and evening classes.

Short, Intensive Training

of a very practical sort puts you immediately into a high salaried position. Many of our students are assisted to responsible positions before graduation . . . they earn while they learn.

Chicago Technical College Bldg.

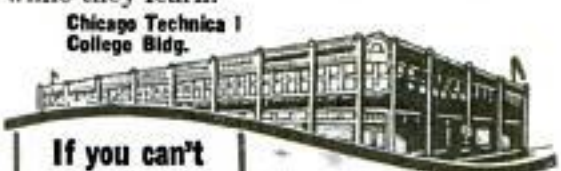

If you can't come to Chicago

STUDY AT HOME

Ten months from today you can be a trained draftsman...Trained men are in demand...at high salaries. Enter a profession, without sacrificing time. Study

DRAFTING

in your spare time...We have been giving technical training for 22 years...Instructors are experts, the same instructors as in the resident school.

FREE TRIAL LESSON

To see how much you will like this high-grade profession, and

FREE OUTFIT

a regular $25 draftsman's outfit is included in the price of the course.

Send for 40-Page Book

of facts about drafting... send for it...free. Write today for the Free trial lesson in drafting, sample drawings made by students and the book of information. Address Dept. 730.

Courses are arranged to suit your needs: 2-year diploma; 3-year B. S. degree; special short courses adapted to the individual. Instructors are experts, actively at work in the very professions they teach. Tuition is low, terms easy. Enter any time.

Write for Free 52-Page Blue Book

It tells about the courses (full descriptions); about the great demand for Chicago Technical College trained men; about college athletics and other interesting facts you'll want to know. Send for the Blue Book now, without obligation! Address

Chicago TECHNICAL College

Dept. 18, 118 East 26th St., Chicago

Copyrighted material

Earn up to $250 per Mo.

Expenses Paid
Many Chances for Advancement

BE A RAILWAY TRAFFIC INSPECTOR

Trained Men Wanted

Prepare for this fascinating work with assurance that you will not have to hunt for a position upon graduation. For over seven years our graduates have been provided with positions or their money refunded. Start at $110 a month or more, expenses paid. You take no risk and can prepare in your spare time.

From a Graduate

Ralph E. Becker: "Ten days after receiving my diploma I was given a position with a large railway company in the east. Traffic inspection offers *steady employment* and the opportunity to travel all over the country."

Advancement Rapid

with experience. Meet high railway officials. Travel or remain near home. Highly confidential and important work.

More Men Needed

We must train more men for positions soon to be open. Send coupon for full details, including low cost.

Standard Business Training Inst., Buffalo, N. Y.

Send me, entirely free, Booklet No. D-23, giving full particulars about course in Railway Traffic Inspection.

Name.....

Street.....

City.....

New Way to Make Money at Home

Send 2c now for postage on FREE BOOKLET giving full details

We have openings for a few new members in Fireside Industries, a national organization of artistic home-workers. No experience needed. We teach you just what to do and furnish outfit to members without extra cost. Satisfaction guaranteed.

FREE BOOK Tells How

You can easily make extra money, in spare hours or full time, without leaving home. Fascinating work, decorating beautiful art novelties to supply big demand. Read experiences of successful members.

FIRESIDE INDUSTRIES
Dept. 667 ADRIAN, MICH.

Get the BIG PAY RADIO Job

I'LL SHOW YOU HOW

There are thousands more big pay fascinating radio positions open than there are men to fill them. I know what and where these real positions are—and I can qualify you, in a short time, to fill one of them. Be a big pay Radio Man.

$3,000 to $10,000 a Year—Learn at Home

I have successfully trained thousands of men in Electricity, Wireless and Radio for 15 years. I can train you in Radio thoroughly and **quickly**; make you a big pay man. You will learn how to install and maintain transmitting and receiving apparatus, professional and amateur, land and sea. You will know Radio thoroughly—and will get the bigger money because of your better, broader training.

Get My Book Free

Big Set Free! Send name and address for a full outline of my course and how to get the big **A. R. E. Twin Superdyne** Experimental Set absolutely **FREE. Write me personally! Irwin J. Mandels**

AMERICAN RADIO ENGINEERS
646 N. Michigan Ave., Dept. 82, CHICAGO

LEARN WATCHMAKING

and become independent. We help you secure a position. Easy to learn. Send for FREE CATALOG.

ST. LOUIS WATCHMAKING SCHOOL, Dept. 5, ST. LOUIS, MO.

I Make Champs

I give individual coaching by mail in your favorite sport. Twenty-eight champs to my credit. Let me make you one. My system never fails.

Baseball
Tennis
Boxing
Golf

Write me what sport interests you. I will tell you how I can pep you up and turn you into a champ, as I did with Tim Jordan, Harry Babcock, and many others. Write today for my book FREE.

SEIXAS ATHLETIC SYSTEMS, Dept. 114-A, 1920 B'way, N.Y.

LEARN PHOTOGRAPHY!

Earn $200 to $500 monthly. Or start your own business. Photography and Photo-Engraving taught by largest college of its kind in world. Established 1893. Big demand for graduates. **Write for free book.**

Illinois College of Photography, Box 475, Effingham, Ill.

TELEGRAPHY

(Morse and Wireless) and RAILWAY ACCOUNTING taught thoroughly. Big salaries; great opportunities. Oldest, largest school. Endorsed by Telegraph, Railway, Radio, and Government officials. Expenses low—opportunities to earn large portion. Catalog free. **DODGE'S INSTITUTE, Jones St., Valparaiso, Ind.**

LEARN MECHANICAL DENTISTRY

Earn $35 to $125 a week. Taught by actual practice—day or night. Three months' course. Modern laboratories. No previous training required. Established 30 years. For 36-page catalog, write **Dept. 2.**

BODEE DENTAL INSTITUTE

NEW YORK	PHILADELPHIA	BUFFALO	BROOKLYN
126 W. 42d St.	1305 N. Broad St.	501 Washington St.	85 Court St.

Whatever Your Question;—be it the pronunciation of **Fascista**, the spelling of a puzzling word, the location of **Esthonia** the meaning of **soviet, realtor, vitamin, etc.**, this **Supreme** Authority—

WEBSTER'S NEW INTERNATIONAL DICTIONARY

contains an accurate, final answer. 407,000 Words 2700 Pages. 6000 Illustrations.
Regular and India-Paper Editions
G. & C. MERRIAM CO., Springfield, Mass.
Write for specimen pages, prices, etc., and FREE Pocket Maps, **per** Popular Mechanics.

WANTED

RAILWAY POSTAL CLERKS

$1900 to $2700 Year

(All Postal Pay Just Raised)

MEN—BOYS, 18 UP

WRITE IMMEDIATELY

Steady work. No layoffs. Paid vacations

Travel—See Your Country

Common education sufficient. Mail coupon today — SURE!

COUPON

FRANKLIN INSTITUTE, Dept. E-180, ROCHESTER, N.Y.

Sirs: Send me without charge, (1) Specimen Railway Postal Clerk Examination questions; (2) List of government jobs open to men, 18 up; (3) Send free sample coaching; (4) Send free illustrated book, "How to Get U. S. Government Positions."

Name.....

Address.....

Copyrighted material

Swear Off Tobacco

Tobacco Habit Banished Let Us Help You

Quick Results

Trying to quit the tobacco habit unaided is often a losing fight against heavy odds, and may mean a serious shock to your nervous system. So don't try it! Make the tobacco habit quit you. It will quit you if you will just take **Tobacco Redeemer** according to directions.

It doesn't make a particle of difference whether you've been a user of tobacco for a single month or 50 years, or how much you use, or in what form you use it. Whether you smoke cigars, cigarettes, pipe, chew plug or fine cut or use snuff—**Tobacco Redeemer** will positively remove all craving for tobacco in any form in a few days. Your tobacco craving will usually begin to decrease after the very first dose—there's no long waiting for results.

Tobacco Redeemer contains no habit-forming drugs of any kind and is marvelously quick, scientific and thoroughly reliable.

Not a Substitute

Tobacco Redeemer is in no sense a substitute for tobacco, but is a radical, efficient treatment. After finishing the treatment you have absolutely no desire to use tobacco again or to continue the use of the remedy. It helps to quiet the nerves, and will make you feel better in every way. If you really want to quit the tobacco habit—get rid of it so completely that when you see others using it, it will not awaken the slightest desire in you—you should at once begin a course of **Tobacco Redeemer** treatment for the habit.

Results Absolutely Guaranteed

A single trial will convince the most skeptical. Our legal, binding, money-back guarantee goes with each full treatment. If **Tobacco Redeemer** fails to banish the tobacco habit when taken according to the plain and easy directions, your money will be cheerfully refunded upon demand.

Let Us Send You Convincing Proof

If you are a slave of the tobacco habit and want to find a sure, quick way of quitting "for keeps" you owe it to yourself and to your family to mail the coupon below or send your name and address on a postal and receive our free booklet on the deadly effect of tobacco on the human system, and positive proof that **Tobacco Redeemer** will quickly free you from the habit.

Newell Pharmacal Company
Dept. 300 **St. Louis, Mo.**

Free Book Coupon

NEWELL PHARMACAL CO.,
Dept. 300 **St. Louis, Mo.**

Please send, without obligating me in any way, your free booklet regarding the tobacco habit and proof that **Tobacco Redeemer** will positively free me from the tobacco habit or my money will be refunded.

Name.....

Street and No.....

Town..... State.....

Copyrighted material

ELECTRICAL EXPERTS IN DEMAND

Good positions await trained men. Salaries of $12 to $30 a day not unusual.

THE ELECTRICAL field needs men. It needs them badly. Hardly a week or month passes but what some new use for electricity is discovered. Each new use means new positions—*better positions*—for men who have trained themselves as experts in this wonderfully fascinating work.

Why don't *you* study electricity and prepare for a good position at a good salary?

You can do it right at home in spare time through the International Correspondence Schools. Best electrical home-study courses ever offered. Endorsed by Edison and Steinmetz. Successful students everywhere.

MARK AND MAIL THE COUPON TODAY FOR FREE BOOKLET

TEAR OUT HERE

INTERNATIONAL CORRESPONDENCE SCHOOLS

BOX 5520-E SCRANTON, PA.

Explain, without obligating me, how I can qualify for the position, or in the subject, *before* which I mark X.

- ☐ ELECTRICAL ENGINEER
- ☐ Electrician
- ☐ Electric Wiring
- ☐ Electric Lighting
- ☐ Electric Car Running
- ☐ Heavy Electric Traction
- ☐ Electrical Draftsman
- ☐ Electric Machine Designer
- ☐ Telegraph Expert
- ☐ Practical Telephony
- ☐ MECHANICAL ENGINEER
- ☐ Mechanical Draftsman
- ☐ Toolmaker
- ☐ Machine Shop Practice
- ☐ Gas Engineer
- ☐ CIVIL ENGINEER
- ☐ Surveying and Mapping
- ☐ Reading Architects' Blue Prints
- ☐ METALLURGY
- ☐ ARCHITECT
- ☐ Architectural Draftsman
- ☐ PLUMBING AND HEATING
- ☐ Sheet Metal Worker
- ☐ Automobiles
- ☐ CHEMICAL ENGINEER
- ☐ Pharmacy
- ☐ SALESMANSHIP
- ☐ Show Card and Sign Painting
- ☐ RAILROAD POSITIONS
- ☐ ILLUSTRATOR
- ☐ DESIGNER
- ☐ BUSINESS MANAGEMENT
- ☐ Private Secretary
- ☐ Business Correspondent
- ☐ BOOKKEEPER
- ☐ Stenographer and Typist
- ☐ Cert. Public Accountant
- ☐ Traffic Management
- ☐ Commercial Law
- ☐ GOOD ENGLISH
- ☐ Common School Subjects
- ☐ CIVIL SERVICE
- ☐ Railway Mail Clerk
- ☐ STATIONARY ENGINEER
- ☐ Textile Overseer or Supt.
- ☐ AGRICULTURE ☐ Spanish
- ☐ Navigator ☐ Math'm't'cs
- ☐ Poultry Raising ☐ RADIO

Name_____ 3-6-24

Present Occupation_____ Business Address_____

Street and No._____

City_____ State_____

Canadians may send this coupon to International Correspondence Schools Canadian, Limited, Montreal, Canada

Ludwig

Trap Drummers! With one of the new Ludwig Trap Drum outfits you will be able to make from $75 to $200 a week. Nearly all famous drummers use Ludwig equipment. Write in today for full information on all outfits.

LUDWIG & LUDWIG, *The World's Largest Manufacturers of Percussion and Rhythmical Instruments. Drum Makers to the Profession*

1611 N. Lincoln St., Dept. 8135, Chicago, Ill.

ALL METAL ADJUSTABLE PANTOGRAPH

Indispensable wherever a draughting board is used. Quickly enlarges or reduces. Sent postpaid on receipt of..... **$3.00**

Money refunded if not satisfactory.

DRAWING AIDE CO.
206 Caxton Bldg., Cleveland, Ohio

BIG MONEY IN POULTRY

Now's the time to get into the poultry business. This Fall eggs will jump way up in price. You can start small. Handsome profits in spare time. Free book tells all about our new, up-to-date, money-making poultry course, prepared by experts, and about our remarkable plan of close, careful, individual assistance. Write for a copy today.

National Poultry Institute, Dept. 151-I, Washington, D. C.

Could You Sell a $40.00 Suit for $23.50?

You don't have to have experience in selling such goods. In fact you don't have to have any selling experience whatsoever. The only question is, could you sell a $40.00 value for $23.50 if given a powerful, impressive selling outfit with which to do it, and careful and complete instructions on how to go about it. If you think you could, we'll take you, equip you, teach and train you in a way that will assure you earnings of $75.00 to $150.00 a week and even more, provided you're honest, thoroughly dependable and willing to work hard to make the most of what is really an unusual opportunity for the right man. We're an old established house of unquestioned reliability and responsibility. We work with our salesmen and stand back of them in a way that few houses do. That's why we're so particular about the men we take. If you, too, are particular about the house you work for, let us hear from you and when you write, tell us all about yourself, who you are and what you've done. Address Dept. 431.

WILLIAM C. BARTLETT, Inc.

850 West Adams Street CHICAGO

Copyrighted material

The Finger Print on the Gun

Two shots rang out in the darkness with but a single report. One found its mark in the heart of an innocent man. The other crippled the gun arm of the murderer. A thrilling escape through a cordon of police. But behind lay the murderer's revolver with the telltale finger print clearly impressed on the smooth, bluedsteel.

Almost every paper tells of the exploits of the Finger Print expert, the master detective. Why don't you —

Be a Finger Print Expert

More men are needed every day. But only trained men are wanted. We will train you at home in your spare time, as we have trained many of America's greatest experts.

Big Money to Experts Big salaries are paid. Rich rewards offered for "wanted" man. Unlimited opportunities for a professional business of your own.

Special Offer Now Write at once. Get full details. Also our Free book on Finger Prints, full of true stories of crime mysteries solved by our graduates. Free Professional Outfit and Free course in Secret Service Intelligence if you enroll now. Write today.

University of Applied Science
1920 Sunnyside Ave., Dept. B-135, Chicago

Delivered to You Free

for 30 days trial on approval. You can have your choice of **44 Styles**, colors and sizes of the famous **RANGER** Bicycles. *Express prepaid.* **Factory-to-Rider** Prices save you $10 to $25 on your bicycle.

$5 a Month if desired. Many boys and girls easily save the small monthly payments. Parents often advance first payment.

Tires best quality, at factory prices, *express prepaid.* Lamps, wheels and equipment, low prices. **Send No Money**, do business direct with makers.

Mead CYCLE COMPANY DEPT. G-108 CHICAGO

Write today for free Ranger Catalog, factory prices and marvellous easy payment terms

NOTICE—I can help a few more men, women, boys, girls, 17 to 65, qualify for Government Positions, $140-$300 monthly, traveling or stationary. Write Mr. Ozment, Dept. 111, St. Louis, Mo. AT ONCE.

PIMPLY SKIN made WELL

When a few applications of this wonder-working lotion has cleared faces of ***pimples, blackheads, acne eruptions*** on the face or body, ***barbers itch, eczema, enlarged pores, oily or shiny skin,*** you can realize why CLEAR-TONE has been tested and approved in over **100,000 Test Cases.** The simplicity of the treatment, and *The Story of How I Cured Myself* are all explained in my free booklet, *"A Clear-Tone Skin."* Write for your copy today and learn of the results gotten by thousands of men and women.

E. S. GIVENS, 128 Chemical Bldg., Kansas City, Mo.

$1.00 DELIVERS to Your Home

Complete Outfit

Violet Ray

ONLY $1.00 brings this complete, scientific Violet Rays outfit to you. Treat yourself and family at home, save delay, costly doctors and medicines. Thousands use Violet Rays at home to relieve pain and sickness. The identical outfits doctors have bought from us for years and with which they successfully treat many ailments, including those listed below.

QUICK RESULTS—No Medicine

Violet Rays work quickly, it's scientific, goes after the cause. That's why results are quick, permanent. Dr. Duncan, Kewanee, Ill. writes, "Violet Rays is the finest thing I ever used . . . . to relieve pain, treatments are so pleasant all my patients like it." Use it yourself at home, you save Doctor's bills.

BEAUTY AID

Brings natural, magnetic beauty of health, no dieting, exercise or drugs. FREE book tells in detail how high priced beauty specialists use it to improve scalp and skin.

EARN CASH

Men, women, without experience earn liberal profits in spare time showing Violet Rays to neighbors. Proves results first demonstration. Sells on sight. Get attractive offer and wholesale prices now.

SEND FOR FREE BOOK

Explains how Nikola Telsa discovered Violet Rays, how it works, why it heals. Tells what doctors and plain folks accomplish in conquering pain, disease and nervous trouble with Violet Rays.

Reveals Marvelous Scientific Discovery Shows charts of human body, explains where pains start, how to banish them. Offered FREE for a limited time only, to introduce Violet Rays. Send for FREE copy.

Check Your Ailment Below for Free Advice

Here is a partial list of ailments successfully treated with Violet Ray:

Catarrh	*Eye Diseases*	*Lumbago*	*Skin Diseases*
Chilblains	*Falling Hair*	*Nervousness*	*Sore Throat*
Colds	*Hay Fever*	*Neuritis*	*Sprains*
Constipation	*Headache*	*Paralysis*	*Tonsilitis*
Earaches	*Goitre*	*Piles*	*Whooping Cough*
Eczema	*Insomnia*	*Rheumatism*	*Asthma*

Mail Coupon—Send No Money

VI-REX COMPANY
211 S. Peoria St. Dept. 27 Chicago

Please send me without cost or obligation your free book describing your VI-REX Violet Ray outfits, and details of your $1.00 offer.

Name _____

Address _____

City _____ *State* _____

Copyrighted material

LEARN CARTOONING

Successful cartoonists earn big salaries. Many of the most popular cartoonists of today learned to draw in their spare time, at home, through the Landon Course of Cartooning and now earn $75 to $200 or more per week.

The Landon Picture Chart Method of teaching ORIGINAL drawing makes cartooning easy to learn. Hundreds of sketches like the above explain every step in creating ORIGINAL heads, figures, animals, etc.
Send 6c in stamps today for sample Landon Picture Chart and full explanation of this wonderful course, also long list of successful Landon students and information showing possibilities for you. *Please state your age.*

The Landon School, 738 National Building, Cleveland, Ohio

Former Students Who Are Now Successful Comic Strip Artists

BLOSSER— *Creator of Freckles and His Friends.*
BYRNES— *Creator of Reg'lar Fellers.*
BRANNER— *Creator of Winnie Winkle.*
LOCHER— *Creator of Cicero Sapp.*
TAYLOR— *Creator of Mom 'n Pop.*
EDWINA— *Creator of "Cap" Stubbs.*
CRANE— *Creator of Washington Tubbs II.*
REDNER— *Creator of "Toby & Tike."*

2½ Tons Heats 5 Rooms!

Bulldog Pipeless Furnace

"No heater can compare with the Bulldog Pipeless Furnace. 2 1-2 tons of coal last winter heated 5 rooms and bath." — Walter Geary, Gloucester, Mass. "Cuts coal bills in half!" — Jess T. Conrad, Shamokin, Pa. "Heats home for 25c a week in normal weather, using grain screenings!" — F. R. Bodetzke, Cleveland, O. **The Bulldog comes completely erected — fits any height of basement — and you install it yourself!**

No Money Down!

The Bulldog is sent on free inspection and is sold at an amazingly low price on small monthly payments.

FREE! Our big illustrated book shows how to get all the heat you want—where and when you want it—**and save money!** Send for it TODAY!

BABSON BROS., Dept. B-935
19th St. and California Ave., Chicago

$3,000 to $5,000 a Year

If you want to make at least $3000 a year, send for our new big catalogue FREE. Qualify for a big pay job in the automobile business after only 10 weeks' training in New York. Previous experience not necessary. You learn by doing actual work on passenger cars, truck and tractors. Thousands of successful graduates.

FREE BOOK—Write today for large, illustrated catalogue

STEWART AUTOMOBILE SCHOOL
225 West 57th Street Dept. B175 NEW YORK CITY

LEARN WATCHMAKING AND ENGRAVING

BY OUR PROFIT-SHARING PLAN

OUR GRADUATES SUCCEED

One of our Iowa students started in a very small way—now doing over $30,000 a year. Another in Wisconsin, over $10,000 the first year. Day or night classes. Call or write for FREE BOOK

Chicago School of Watchmaking, Dept. 601, 4848 Lincoln Avenue, CHICAGO

A WONDERFUL GOLD MINE

For You

ASK FOR MY NEW
Big Gold Producing Plan
IT'S A WINNER! **FREE SAMPLE**
Exclusive territories to agent distributors of the **GLAROFF**

The greatest money-making and money-saving Glare Protector ever invented — territory GOING FAST. WRITE TODAY. — Chas. D. Symms, President.

GLAROFF MFG. CO. 805-K Raad Street SIOUX FALLS, S. D.

STOPS FALLING HAIR

ASK YOUR BARBER OR DRUGGIST

Millions of men, women and children have found the secret of hair-health in **"Lucky Tiger"**—the world's greatest remedy for falling hair, dandruff and all scalp disorders. A single application stops that miserable itching. *Always sold under a positive Money-Back Guarantee.*

LUCKY TIGER

LEARN Wrestling Secrets at Home by Mail

Yes, learn the secrets of World's Champions—how to wrestle expertly—how to handle big men with ease—how to **win**. Be athletic, be strong, be healthy. Learn how to **defend** yourself.

Farmer Burns

the world's most **scientific wrestler**, who trained the undefeated Champion **Frank Gotch**—who also trained **six** other World's Champions, will **now train you**. Investigate **today** his wonderful methods—the secrets of Champions. Every man and boy in the world, no matter what age, needs this information on **SCIENTIFIC WRESTLING — PHYSICAL CULTURE — JIU-JITSU — SELF DEFENSE.**

Free Book Send your name and age and get my splendid 32 page illustrated wrestling and athletic book—absolutely free —no obligations of any kind. **Write NOW.**

FARMER BURNS, B177 Fr. Exchange Bldg., Omaha, Neb.

NO MORE BALD HEADS

WHEN our VACUUM CAP is used a few minutes daily. We accept no pay until you have tried the Cap 60 days and are satisfied. The Vacuum Cap is an appliance that draws the blood to the Hair Roots and starts a new healthy crop of hair. It stops Dandruff, stops the hair from falling out. Bought by Doctors and men who know that it is the only reasonable HAIR GROWER known to science. No Drugs Used. Write for application blank, testimonials and booklet on "HAIR," sent sealed in plain envelope, FREE.

THE MODERN VACUUM CAP CO.
J-559 BARCLAY, DENVER, COLO.

Copyrighted material

FROST RADIO

This book describes and illustrates all **FROST-RADIO** parts used in the famous Popular Mechanics Circuit

Your Copy Free

Send today for a copy of the catalog which shows all of the **FROST-RADIO** parts and accessories used in making the world-famous Popular Mechanics set. You must see and select the apparatus at your local dealer's, as we do not sell by mail, but you will want a copy of this **Free** catalog to help you in choosing the parts specified by Popular Mechanics. Tells all about **FROST-RADIO** sockets, rheostats, jacks, plugs, switches, etc. Remember—this 48 page book is **free.** Write for it today. Address Dept. 14F437.

FROST-RADIO
No. 619 BAKELITE Shock Absorber Gang Socket. $3.25

HERBERT H. FROST, Inc.
314 W. Superior Street CHICAGO
NEW YORK CITY CLEVELAND
KANSAS CITY LOS ANGELES
Export Office: 314 W. Superior Street, Chicago

HERBERT H. FROST, Inc. - Dept. 14F437
314 West Superior St., Chicago

Please mail me free of charge a copy of your 48-page catalog.

Name.....

Street Address.....

City..... State.....

More Money For You *in* RADIO

THE amazing expansion of Radio has opened up hundreds of wonderful new positions on land and sea. Big salaries, fascinating, easy work, short hours, and a wonderful future are offered to ambitious men who get into Radio now.

Take advantage of these wonderful opportunities to step into a big paying position in this great new field. You can stay at home and work up to a position paying up to $10,000 a year, or Radio offers you an opportunity to travel and see the world, with all expenses paid, and a fine salary besides. One of our recent graduates, Emmett Welch, of Peculiar, Mo., secured a position one week after graduating, paying a salary of $300 per month. Hundreds of others report equal success.

Easy to Learn Radio at Home

Thousands of Certified Radio-tricians are wanted to design Radio sets; to make new Radio improvements, to manufacture Radio equipment and to install it; to maintain and operate great broadcasting stations and home Radio sets; to repair and sell Radio apparatus; to go into business for themselves; to operate aboard ship and at land stations.

You can easily and quickly qualify in your spare time at home through the help of the National Radio Institute—teaching Radio successfully by mail since 1914. No previous experience or training needed. Prominent Radio Experts will help you in every problem, giving you personal attention. You learn by actually doing, as we furnish free with the course, circuits and parts for building latest receiving sets, making the work thoroughly practical. You learn quickly and easily—right at home.

This is an absolutely complete course which qualifies you for the real "big pay jobs" in Radio and our big Employment Department helps you get one.

Send for FREE BOOK

No other field today offers such great opportunities as Radio. Take your choice of the many wonderful openings everywhere. Prepare now to step into the most interesting and best paid profession today. Read about the opportunities open now—the different kinds of work—the salaries paid. Write today for the 32-page book that tells how America's Radio correspondence school (government recognized) can teach you to become a Certified Radio-trician in your spare time, and also Special Offer to those who act at once! Mail the coupon or write letter NOW. **National Radio Institute, Dept. 15JB, Washington, D. C.**

NATIONAL RADIO INSTITUTE, Dept. 15JB
Washington, D. C.

Without obligation, send me your book, "Rich Rewards in Radio," which tells all about the opportunities in Radio, how spare time study at home will qualify me quickly as a Certified Radio-trician so I can get one of the splendid positions, and how your Employment Service helps me to secure a big pay job. **Please write plainly.**

Name.....Age.....

Street.....

City.....State.....

Copyrighted material

Be a BIG PAY Electrical Expert

Earn $3,500 to $10,000 Yearly

Read My 16 Smashing Offers

Here are the biggest offers yet—so big that I can't explain them all on this page. You don't know what wonderful offers I make you. You don't know what wonderful things I do for my students till you get my book "The Vital Facts." Send for it now. Get the details of my 16 smashing, world beating offers.

The Vital Facts

This is the book that has shown thousands of men the way to amazing pay increases. Get your Free copy now. Learn how other men, no smarter than you, have increased their pay 100%—200% and even 500% through Cooke Training. Send Coupon Now!

Get into Electrical Contracting

John Jirinec, 1133 Fourth Ave., Astoria, L.I. New York, makes $800 to $1000 a month in business for himself. He says Cooke Training is responsible for his success.

Auto Electricity Pays Big

W. E. Pence, Albany, Oregon, specializes in Auto Electricity and makes $750.00 a month. Was formerly a mechanic earning $30.00 a week.

Big Money in Electrical Construction

A. F. Klemz, 4449 Kerwin, Detroit, Michigan, earns over $5000 a year in Electrical construction work. He formerly earned $5 a day.

Even ordinary electricians are earning $10 to $12 a day and thousands of big jobs paying $70 to $200 a week are going begging for want of trained men to fill them. Electrical Experts (trained men) are needed everywhere now. Electricity—the fastest growing industry and best paying profession in the world—NEEDS YOU. I will train you just like I trained the three men whose pictures you see to the left, and thousands of others. Get the details of my training and my 16 great smashing offers to you.

I Will Train You at Home—in Spare Time

In my training you get my own 20 years of experience as an engineer; the knowledge and experience of 50 other noted engineers and the full time and services of 10 college trained and practical engineers whom I employ to assist me in the work of training my students.

Why Cooke Trained Men are So Successful

Cooke Trained Men easily get the big jobs in electricity because employers know me—They know the value of my training and the reputation of the big two million dollar institution behind me. Over 3000 men who started with my training reported big pay increases to me last year. My employment department helped many of these men land the fine big jobs they are now holding.

My Training Pays Its Own Way

Most of my students make many times the monthly payments for my training in spare-time work. Beginning with your 6th lesson I give you special spare-time work instruction. You earn while you learn. My training is not an expense—it pays its own way.

Go Into Business With My Money

Every month I give two of my students $500 in cash to go into business for themselves. No strings to this offer. It's an outright gift—all explained in my book.

Get the Facts—Write Me Now

The coupon will bring you the big story of the opportunities for you in Electricity. Don't decide on any training till you get my book. Learn how hundreds of other men get into the big-pay class. Get my 16 smashing offers. **Mail Coupon Now.**

L. L. COOKE, Chief Engineer, Chicago Engineering Works, Inc.
Dept. 51-B, 2150 Lawrence Ave., Chicago, Ill.

The "Cooke" Trained Man is the "Big Pay" Man

Mail Now

L. L. COOKE, Chief Engineer, Chicago Engineering Works, Inc., Dept. 51-B, 2150 Lawrence Avenue, Chicago, Illinois

Send me at once without obligation full particulars of your home training in Electricity and details of your 16 great offers and your plan for financing your students.

Name.....

Address.....

City..... State.....

Copyrighted material

Classified Advertisements

WORLD'S BEST WANT AD MEDIUM

Advertisements in this section, 25 cents per word, each insertion, minimum 10 words, payable in advance. To be inserted under proper classification in August issue, copy should be in our office June 18th.

ADVERTISING AGENCIES

TO secure agents or salesmen or for selling farms and reaching investors, use classified (want) ads in largest newspapers and magazines. Price list No. 30 sent free. Ankrum Advertising Agency, 20 W. Jackson Blvd., Chicago, Ill. The largest classified advertising agency in the U. S.

ADVERTISE in 24 Big Sunday Newspapers, 24 words $15.00. Catalog listing 1,000 leading Dailies, Weeklies, Magazines, 4c stamps. Union Advertising, Baltimore Bldg., Chicago.

ADVERTISING in all magazines and newspapers at publisher's lowest rates. Rate book free. Taylor's Advertising Service, Dept. F, Freeport, Ill.

25 WORDS—357 Rural Weeklies $14.20. Ad-Meyer Agency, 4112-M Hartford, St. Louis.

ADVERTISE, hundred magazines, three issues 10c word. Pennell, Covington, Ky.

25 WORDS, 75 Country Town Newspapers, only $3.40. Shaw, 221A Northeast, Washington, D. C.

ADVERTISING 222 Magazines, .08c word, $6.00 inch, Sample 10c. Diamond Advertiser, Norton, Mass.

28 WORDS 400 Rural Weeklies $12.50. Keator, Hartford Bldg., Chicago.

FOR ADVERTISERS

AGENTS' Names neatly typewritten from our one-day-old inquiry letters. Price right. H. World, 166 W. Washington, Chicago.

COVER United States—28-Words, 4,000 Country Newspapers, $95.00. Inch $300. Proof Guaranteed. Keator, Hartford Bldg., Chicago.

INCH Display—100 monthlies, 73 weeklies, combined, $12. Cope Agency, 233P, Champaign, Ill.

I WRITE letters, folders, booklets, complete followup for manufacturers, mail order dealers. Long experience. Write for details. L. Taylor, Box M44, Freeport, Ill.

28 WORDS 80 Country Newspapers $3.00. Inch $8.00. Keator, Hartford Bldg., Chicago.

25 WORDS 88 magazines $1.00; thrice $2.00. Smith's Service, 1194, Wenatchee, Wash.

CIRCULARIZE guaranteed Lists. Agents' names, $5.00, 1,000. Pennell, Covington, Ky.

YOUR 28-word ad 300 country newspapers $10; inch $30. Write for list. Keator, 7 Hartford Bldg., Chicago.

SALES PROMOTION

$50 to $50,000 Daily Sales developed during 36 years for clients by my direct-mail plans, copy, campaigns. A $25,000 annual volume increased ten-fold in twelve months. Another, from an initial expenditure of $720 developed in four years sales by mail of half million yearly. Ten years Sales Promotion Manager Larkin Co. Submit sales problems for Free diagnosis. James C. Johnson, 118A Woodbridge Ave., Buffalo.

QUEX Sales Letters Get More Business. Write him today. Quex, 4418 Michigan Ave., Chicago.

AUTOMOBILE SUPPLIES

RADIATORS—Purchase direct from manufacturer and eliminate middlemen's profits. Bargain prices on all standard makes of radiators. Satisfaction guaranteed. Independent Radiator Co., 1117-23 Wabash Ave., Chicago, Ill.

RECENTLY purchased large stock of Meseo Flush Connectors. Willing to sacrifice at 10c a piece. Hawkeye Clock Co., Muscatine, Iowa.

OLD spark plugs rebuilt. Guaranteed same as new. Standard makes. 30c each. We also buy old worn-out plugs. For particulars write. B. S. Salvage Co., 46 West Kinney St., Newark, N. J.

AUTO parts—Save 20% to 80%. Warshawsky & Co. See display ad on page 126.

MILLERITE-ETHYL-Super-Fuel Ingredient for Gasoline. Increases Power and Mileage—Saves Gas. Make it yourself by my simple Formula and clean up five to fifty thousand a year. This and eighteen other High Class Automobile Specialties described in the valuable literature I'll send you upon request—Hurry! Exclusive Territory!! Miller, Chemist, 1109-1111 Grand Central, Tampa, Fla.

MAKE Automobile Polish. Details for 4c stamps. H. Wuerch, 411 Main, Oshkosh, Wis.

"MISTLESS," Sheds rain. Convenient necessity for motorists. Sells 40 cents. Send 20 cents stamps for sample. Special discount to agents. Specialty Products Co., Dept. PM, Cedar St., Hillside, N. J.

START Profitable Business Operating "Outfits Furnished" For silvering mirrors, auto-parts, tableware, stoves. Plans Free. Sprinkle, Plater, 77, Marion, Ind.

GEARS — Guaranteed Steel Flywheel Starter Bands, $3.50 Postpaid. Westinghouse Micarta Timing Gears. Ring Gears and Pinions. Rifner's Auto Supply, Salina, Kans.

DISTRIBUTORS and Representatives Wanted everywhere. Exclusive necessity. Kelly Automatic Roadlite. Ford, Chevrolet, Overland and all others. John B. Kelly, 4617 W. Harrison St., Chicago, Ill.

USED Parts for Dodge Brothers Cars 50 to 75% from Factory List Price. All Parts Guaranteed A No. 1 Condition. Harris Motor Car Company, Cape Girardeau, Mo.

J. B. S. RIM Compound prevents tires slirking to rims, stops creeping and overheating—makes tires last longer. Also prevents rust. Two years' supply $1.00 postpaid. Circular free. J. B. Sesat Mfg. Co., Dept. P, Freeport, Ill.

VULCANIZING Auto Tires is a Paying Business. We have Plants near you from $100 up. We save you 50%. Catalog Free. Instruction Book $1. Equipment Exchange, 108 East 11, Los Angeles, Calif.

AUTOMATIC Air Compressor, complete with motor, only $16.50 monthly. Quickly builds your business. Send postal for particulars. Hobarth, Troy, Ohio.

AUTO Trailer $39.00, light weight, ½-ton capacity; over 300 in use in our home county. Catalogue free. Bower Mfg. Co., Box 6, Fowler, Ind.

AUTOISTS, Make sure your Head-Lights are on. Our "Is-It-Lit" Telltales at $1.25 will advise you. Out of Gas? Our Siphon Pump costing $2.50 will enable you to borrow gas from the next passing car and get home. Handy Specialty Co., Somerville, Mass.

LIGHTNING! Wonder Fluid! Charges batteries instantly! 20c charges dead battery. Guaranteed not to injure battery. Chance to clean up fortune selling to garages and agents. Formula and sales plan $5.00. Circular free. Murphy, Chemist, Tujunga, Calif.

$250.00 TO $300.00 profit monthly easily earned with One Day Battery Service. It costs only $20 monthly. Send postal to Wilhobart, Troy, Ohio.

AUTOMOBILE Parts—Used parts for most any car at half factory list prices. Allen, Briscoe, Buick, Cadillac, Chalmers, Chevrolet, Dodge, Dort, Grant, Hudson, Hupmobile, Oakland, Overland, Oldsmobile, Reo, Studebaker and many others. Send list of parts wanted. Century Auto Parts Co., 4106 Olive St., St. Louis, Mo.

MAGNETOS, Starters, Generators, Ignition Systems, Spark plugs, Parts, Repairing. Meinert Magneto Co., 1247 Prospect Ave., Cleveland, Ohio.

ETHYL Gas—Scientific marvel. Greatly increases power and mileage. Eliminates carbon. Easily made. Formula $3.00. Write for circular. Murphy, Chemist, Tujunga, Calif.

AUTOMOBILE SUPPLIES, ACCESSORIES AND HOUSEHOLD SPECIALTIES WANTED

PENNSYLVANIA Distributor reaching more than one million automobile owners will consider meritorious automobile supplies and accessories. If you desire such representation submit description, sample and best-rock prices. James C. Johnson, 118B Woodbridge Ave., Buffalo.

AUTOMOBILES

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 589B Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

AUTOMOBILE Owner's Handbook containing 286 ideas for making your car longer lived and more comfortable. Also tells how to make emergency repairs on the road. 221 illustrations. 50 cents. You should also have Automobile Tourist's Handbook which has dozens of ideas on auto camping and touring. 50 cents. Both books for $1. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

GET the Professional Trouble Shooter, showing how to locate and repair all mechanical and electrical Automobile troubles by sounds, effects and actions. $1.50 C.O.D. Plus shipping. Box 195, Ironton, Ohio.

$500.00 TO $500.00 profit monthly in One Day Battery Service. Easy monthly payments allowed. Hobburts brings particulars without obligation. Hobburts, Troy, Ohio.

DYKE'S Automobile Encyclopedia. 13th edition, new, greater than ever, entirely rewritten and rearranged. Contains greatest array of automobile facts ever published in one volume. Separate books containing same information cost $21. Over 1,200 pages and 4,100 illus. Cloth $6. Flex. Amer. Morocco $7.50 postpaid. Send no money. Simply write a postal, if you live in the U. S., saying you want "Dykes." When the postman hands you the book, give him the price plus the few cents postage. Popular Mechanics Press, 200 E. Ontario St., Room 806, Chicago, Ill.

FOR FORD OWNERS

FORD Owners who dislike motor "bucking" in traffic, who wish to take long steep hills on high, who perhaps desire extreme speed, should use Avaco Valve Action which scientifically and simply increases valve capacity on a Ford. Durable, easily installed, inexpensive. Honest money-back guarantee. Write. Auxiliary Valve Action Company, Fitchburg, Mass.

WARM gasoline improves ignition and saves fuel. Uniform gasoline pressure to carburetor at all times—no grades too steep. Install the famous Auxiliary Gasoline System. Better than a Vacuum at a mere fraction of the cost. Nothing to get out of order and will last as long as your Ford runs. Send $3.50 for outfit complete prepaid. Absolute and positive guarantee. 4 A Products Company, Mfrs., Department A, Denver, Colo.

HY-POWER Timer for Fords. Average life over 18,000 miles. Price $1.50. Guaranteed one year. Hy-Power Manufacturing Corporation, Dept. N, Mt. Vernon, N. Y.

FORDS Sedan beds. Two-door $7.00. Tudor $9.00. Milligan & Chrey, Bremerton, Wash.

TIGHT Valves Save Gas. Our outfit includes Instructions, Grinding Compound, and Tool. Nothing else to buy. $1.00 Mailed Anywhere. Vaclift Valve Grinder Co., Minterbrook, Wash.

Copyrighted material

2½ MORE volts than any ordinary Ford Timer. More power, more pep, better pick-up, and instant starting. Wipe Timer Brush—replaces roller in any standard Ford Timer. Smooths out worn timer shells. Positive contact—strong, steady spark—uses no oil or grease. Highest grade carbon steel lip, or wearing surface, is harder than glass. Helps keep spark plugs clean. Eliminates much carbon and coil trouble. Sent prepaid for 75c. Fully guaranteed. Order one today. 4 A Products Company, Mfrs., Department A, Denver, Colo.

USED Ford Parts Guaranteed. 65% Discount; write for prices. Tower Cycle Salvage Co., 4305 North Florissant Ave., St. Louis, Mo.

ONE Day Battery Service pays big in smaller Shops. Only $16.50 monthly. Hobartsco brings particulars. Hobartsco, Troy, Ohio.

FORD sport, speed bodies and specialties. See ad, page 147.

UNDERSLING with "RKO" Swing Lo Irons. See "Red-i-Kut" ad page 136.

MOTORCYCLES, BICYCLES AND SUPPLIES

SEND for our Bargain Bulletin and Money Saving Message. It will save you money on Motorcycles, Side Cars, Motor Wheels, Repair Parts and Accessories. Some used parts at less than half. Cleveland and Ace Motorcycles our specialty. See our ad on page 131. American Motor Cycle Co., 2045-5-7 W. Chicago Ave., Chicago.

OVERSTOCKED—200 Used Motorcycles. Must be sold at once. We have Harley-Davidsons, Indians, Hendersons, Excelsiors, Clevelands. Write for our Bargain List. Myerow Brothers, Dept. B, 15 Berkeley St., Boston, Mass.

1922 HARLEY-DAVIDSONS, $135; 1921, $115; 1920, $85; 1919, $65; 1917, $50; 1916, $45; 1915, $40; 1914, $35. Guaranteed. Money refunded if not satisfied. Circular free. Wisconsin Cycle Sales Co., 726 National Ave., Milwaukee, Wis.

DON'T buy a Bicycle Motor Attachment until you get our new catalogue and prices. Also runs washers, pumps, and shop machinery. Shaw Mfg. Co., Dept. 27, Galesburg, Kans.

SEND for Bargain Bulletin. All makes of rebuilt motorcycles at lowest prices. Used parts half-price. Ash Motor Corporation, Rochester, N. Y.

USED parts for all motorcycles, cheap. State wants. Schuck Cycle Co., 1922 Westlake, Seattle, Wash.

USED Harley-Davidson Parts 40% to 80% Discount. Tower Cycle Co., 4305 North Florissant, St. Louis, Mo.

AVIATION

COMPLETE Scale Plans, with Building-Flying Instructions for following 3-ft. Model Aeroplanes, 25c each postpaid; JN4D-2; DeHavilland; NC-4; Curtiss Tractor; Blériot, Nieuport or Taube Monoplanes; Cecil Peoli Racer. Complete 48 pp. catalog 5c, listing hundreds of parts and supplies for experimenters. Ideal Aeroplane Co., 165½ Spring St., New York.

I OWN the greatest flying Ford in the world. Official records prove this. Photographs, history, overall dimensions and particulars of the motor postpaid for $3.00. Excellent large photograph only 50c. C. C. Melton, 3507 E. 34, Kansas City, Mo.

AIRPLANE Wheels, 20x1 ball-bearing, wire type. Just right for small autos, wagons, or scooters. Only $2.50 each. Lincoln Standard Aircraft Corp., Lincoln, Nebr.

TEN lessons in the air, of twenty minutes each will make you a pilot, by our advanced method of training. This, together with our five week shop course at $100.00, makes America's oldest aircraft factory, the most popular flying school; also evening classes. Work after class hours guaranteed. Heath Airplane Co., Chicago, Ill.

AIRPLANES, propellers, leather coats. New 28 hp. motors $125.00. Weigh 135 lbs. Good for sleighs or airships. Smith Machinery Co., P. O. Box 153, Houston, Tex.

GREATEST Glider Airplane; Flies 300 Feet, Loops; 35c Postpaid. Big Model Catalog 5c. W. Phipps, 578 Knickerbocker Ave., Brooklyn, N. Y.

BOYS, get a three-foot model aeroplane free. Nothing to sell. Send stamp for particulars. Aero Shop, 3050 Hurlbut Ave., Detroit, Mich.

DICTIONARY of Aviation, $3.90. Languages Publishing Company, 8 West 40th Street, New York.

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5893 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

"SPORTFORD" Two-Seater, 25-50 horsepower, light plane. Knockdown and complete planes. Blueprints, $5. Propellers, $10. Flying and Shop Course $100. Aviation Engineering Co., Lawrence, Kans.

EARN $3,500 to $10,000 a year. Learn Airplane Engineering Now at Home. The World Flyers were Airplane Engineers. Write for free catalog. Western Airplane Corporation, Dept. K-7, Monadnock Block, Chicago.

BUILD Your Own Airplane—America's latest light Sport plane, raw material and blue prints now ready for builders. Write for particulars. Lincoln Standard Aircraft Corp., Lincoln, Nebr.

MOTORS: Curtiss OXX-6 Class A (under Fifty Hours) for Plane, Sea-Sled, Motor boat, etc., $140.00. All Motor and Plane Spares at Best Prices. Send for Catalogue. Monumental Aircraft Co., 329 N. St. Paul Place, Baltimore, Md.

SEND 10c for our latest aeronautical catalog listing a complete line of airplane goods at reduced prices; Propeller circular 4c, Ford Airplane, or Motorcycle Airplane circulars 4c each. Resistal goggles $2.90. Heath Airplane Co., Chicago, Ill.

LEARN to Fly Now at Chicago's big new Municipal Airport. Complete course in straight flying, Acrobatic flying, cross country, cloud and night flying. We prepare you for a pilot's license and guarantee to make you an expert Aviator. Spring classes now forming—first class April first—get in early. Write for folder. Chicago Aviation Co., 1811F Stevens Bldg., 17 N. State St., Chicago.

AVIATION Fans: Send one dollar for beautiful pair sterling silver wings, mounted on bar pin with safety catch, and identification card issued by National Flyers' Association. Thousands being worn by pilots, aviation mechanics, and aero enthusiasts. Wallace Aero Company, Bettendorf, Iowa.

THE American School of Aviation announces a new correspondence course in Mechanics of Aviation. A thorough training in Practical Aeronautics. American School of Aviation, Dept. 1861, 3601 Michigan Ave., Chicago, Ill.

FREE Flying Scholarships. Our new course prepares you for a big future in aviation. We give you a chance to learn to fly free. Write for our folder. Chicago Aviation Company, 73E Auditorium Building, Chicago, Ill.

BOOKS AND PERIODICALS

THE Personal Liberty Course (for men)—A happy combination of mirth, merriment and instruction for overcoming fear, timidity, nervousness, bashfulness and psychological "complexes." Quick results guaranteed. Full information gladly sent sealed. Harry Lawrence Juhnke, P. O. Box 854-C, Sacramento, Calif.

HYPNOTISM wins your wishes. Controls! Amuses! Astounds! Pays! 25 Easy Lessons $1.00. Mindreading?" (any distance). Wonderful! 50c (sealed). Popular Institute, 5183 North Green, Chicago.

HOW to Succeed in life. Send in your birth date and picture if handy. Science will help you. Inclose One Dollar. Science and Human Nature, 2783, Francis Pl., Dept. T, Chicago, Ill.

LATEST and Best in Magic Books—Personal Advancement. Popular Mechanics new magazine keeps you posted on the best books of magic. Helpful suggestions for making money with magic performances. Free for one year. No strings to this offer. Send your name and address to Popular Mechanics Press, Room 807, Popular Mechanics Building, Chicago, Ill.

KNOW How—Read "The Book of the Secret Word and the Higher Way to Fortune," by Adaros, $3.10; send 25c for illustrated catalogue of books, etc., with "How to Realize Any Desire." Far East Book Co., 4616 West Ohio, Chicago.

EDUCATIONAL books and correspondence courses, bargain prices, Catalogue 1,000 courses free. Courses bought. Students Exchange, 47A West 42d St., New York.

SWIMMING Devices are described in Popular Mechanics new book, Outdoor Sports the Year 'Round. The crystal-clear descriptions and illuminating pictures make it easy for any boy or man to make the dozens of fascinating devices. There are special devices for swimming, boating, tennis, baseball, football, golf, and winter sports, besides some new sports with which you may not be familiar. Send No Money. Simply write a postal, if you live in the U. S., and say you want "Outdoor Sports." When the postman hands you the book, give him $1 plus the few cents postage. Popular Mechanics Press, 200 East Ontario, Room 806, Chicago, Ill.

INDUSTRIAL Alcohol. Wright's book. Full directions for making drawings. $2.50. Spon & Chamberlain, 120 P. M. Liberty Street, New York, N. Y.

FREE—Send for my Newthought, Self-culture, Occult, Mystic and Scientific book literature. Martens Publisher, Burlington, Iowa.

"NATURE'S Finer Forces"; Vibrations; Lights; Colortones; Electromagnetons; Odicaurus; Radio; Coldlights; Inventions; Wonderful Opportunities; Fifty Lessons; Marvelous Cures; Illustrated. Satisfaction Guaranteed. 270 pages, $2.00. DeLuxe $3.00. M. Stevens, 242 Powell, San Francisco, Calif.

HYPNOTISM easily learned. Lessons guaranteed. Postpaid $1.10. Smith Pub. Co., Dept. 3, Springfield, Mass.

ENCYCLOPEDIA Britannica, India paper, Harvard Classics, half price. Dalton Riegs, Crilly Ride, Chicago.

BOOK, "How to Become Traveling Salesman," 25c. Chillicothe Publishing Co., Chillicothe, Ohio.

HANDICRAFT Magazine tells "How to Make Things." Copy, 10c. Printshop, Rockland, Wis.

"WHERE'D Cain Get Wife?" 15 pages 15c. Jabe Studio, Los Angeles.

PICTURES AND POSTCARDS

75 BEAUTIFUL Art Pictures and Bathing Beauties 25c (coin). Photo Sales Co., 6635 No. Rockwell, Chicago, Ill.

TRUE-BLUE. Established 1908. Exchange cards, letters, stamps. Year, $1; half, 50c; quarter, 25c; booklet, 10c. Ed Erikson, 725, Elroy, Wis.

FOOL your friends. 10 Maine cards 3 dimes. Return to me stamped, addressed to friends, for mailing here. Berntsen, Box 1081, Portland, Me.

JOIN Live Postcard Club; Membership lists including Catalog, 10c. Harvey Teeple, Decatur, Ind.

JOIN Hawaiian Correspondence Exchange. Membership $1.00. Box 2777, Honolulu, Hawaii.

36-PAGE illustrated catalogue of views and photographs 20c. Bert Hedspeth, 3021 California Street, Denver, Colo.

GAMES, ENTERTAINMENTS AND PLAYS

VENTRILOQUISM taught almost anyone at home. Small cost. Send 2c stamp today for particulars and proof. George W. Smith, Room S-15, 125 N. Jefferson Ave. Peoria, Ill.

100 LIGHTNING Chalk Talk Stunts $2.00. Cartoonist, 2925 Euclid, Kansas City, Mo.

POPULAR MECHANICS new illustrated Book Catalog lists books of entertainments and games. A copy is free. Address Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

100 LIGHTNING Chalk Talk Stunts $2.00, Cartoonist, 2925 Euclid, Kansas City, Mo.

WANTED—BUSINESSES FOR SALE

IF You Want to Sell Your Business for Cash quickly and privately, we take the prospective buyer directly to you at our expense, no matter where located. We specialize in selling out-of-town businesses. If your business is worth $5,000 or more, write us The Mutual Security System, 68 W. Washington St., Chicago.

MAGIC TRICKS, BOOKS AND JOKER NOVELTIES

FREE, Books, Mysteries, Magical Novelties, Catalogue. Particulars Free. Singer, 555 Hancock, Wis.

AMAZE and Mystify your friends! Easy to learn. New book, "33 Card Mysteries" and big 1925 Catalog Magic and Novelties, postpaid 10c. Lyle Douglas, Station A, Dallas, Texas.

MAGIC Goods. Catalog free. C. Fenner, 2401 Jefferson, Louisville, Ky.

Copyrighted material

MEXICAN Puzzle Rings. Hand made by Mexican workmen and called the Lovers' Knot. A novel and attractive ring of unusual design. Coin Silver, $2.00. Gold and Silver, $3.50. 14-Kt. Gold $6.50. Postpaid. State size wanted. Bennett Indian Trading Co., Albuquerque, New Mexico.

10 SNAPPY pocket cards and copy White Mule, America's greatest Magazine of Foolishness, all for 10c. Oliver Gandy, Crisfield, Md.

WORLD'S Smallest Receiving Set, 25c. It's a Wow! Satisfaction Guaranteed. Russell Johnson, Clarkfield, Minn.

BOOK of Magic and Illustrated Catalog 10c. Piedmont Novelty Shop, Box 631, Danville, Va.

MAGIC—Tricks, Books and Supplies. For Amateurs as well as the great professionals. Anyone can learn through our instructions. Feature Acts in Mind Reading, Spiritualism, Rope Ties, etc. Large illustrated Professional Catalog, 20c. Chicago Magic Co., 110 S. Dearborn St., Dept. B, Chicago, Ill.

FUN Creating Cards 10c a set. B. Zitka, Fairview, Mass.

FREE with $25 order die box. Send 20c for our large catalogue of tricks, wigs, sensational escapes. Oaks Magical Co., Dept. 548, Oshkosh, Wis.

SEVEN Magical Delusions and Catalogs—25c. Gilmagico, Morgan Park, Ill.

CHEMISTRY

CHEMICAL Catalogue for Experimenters, 5c. George Ott, 1218 Chestnut, Reading, Pa.

YOUR chemical problem solved and working process furnished Five Dollars. Write me. W. Stedman Richards, Consulting Chemist, address, Box 2302, Boston, Mass.

TECHNICAL information, analyses, formulas, trade secrets. Jacob Sluyter, Chemist, 2525 East St., Davenport, Iowa.

LITERARY SERVICE

SPEECHES, arguments and orations promptly prepared by experts confidentially. Reasonable rates. University Rhetorical Bureau, 21 Spalding Bldg., Lowell, Mass.

STAMP COLLECTING

POPULAR Packets—From Countries you Want in Your Album. These are selected from the largest packet list ever offered the American collector. Hundreds more equally good, equally low priced. No. 60, 150 all diff., 10c. No. 279, 25 diff., Egypt, 30c. No. 85, 20 diff., Madagascar, 50c. No. 297, Reunion, 20 diff., 50c. No. 152, Europe, 100 diff., 10c. No. 301, Ireland, 10 diff., 10c. No. 299, Saar, 25 diff., 50c. No. 278, Dutch Indies, 10 diff., 10c. No. 15, 300, all diff., 25c. No. 8, 1,000, all diff., $1.25. No. 248, 75 stamps from 75 diff. countries, 25c. No. 3, 2,000, all diff., $5.00. No. 223, 100 Africa only, all diff., 50c. No. 161, 100 Mexico, all diff., $2.00; No. 211, Honduras, all diff., 50c. No. 72, 100 Portuguese Colonies, all diff., 50c. Every one of these packets bears the Scott Sealed guarantee, which means that every stamp in every Scott packet is not only genuine, but listed in Scott's Stamp Catalogue. Scott Sealed packets contain no post cards, reprints, cut squares, foreign revenues or telegraphs such as are commonly found in packets of uncertain origin. If not exactly as represented we, or any of our dealers, will make good. Write for the Free 80-page price list of bargains in Scott Sealed packets, albums, sets and accessories. Scott Sealed packets are sold at your stamp dealers, or write, Scott Stamp and Coin Co., 33 West 44th Street, New York, N. Y.

ANCHER'S $$$ Outfit—only 12c! Fine triangle stamp; set German stamps with (pre-war) value forty million dollars (interesting!!); perforation gauge, mme. scale; small album; 2 approval sheets; airmail set; scarce stamp from smallest republic on earth; newspaper set; packet good stamps from Travancore, Johore, Dutch Indies, etc. Entire outfit for 12c to approval applicants! (Nice pocket stock book, value 25c, with every order!) Ancher Stamp Co., 148½ Clerk St., Jersey City, N. J.

MYSTIC'S "Mysterious" Packet! Contains stamps from the lands of cannibals, heathens, sun worshipers, and wild savages. Included are Kenya and Uganda, Persia, Africa, Dutch Indies, Gold Coast, Federated Malay States, Abyssinia, Nyassa, Travancore, Siam, Congo, etc. This wonderful packet containing 105 all different (mostly unused) for only 8 cents to approval applicants. Mystic Stamp Co., Dept. 8, Camden, New York.

100 RARE Stamps, all different; bargain lists, Stamp Magazine, everything only 7c. Stanton, Niantic, Conn.

PERSIA—ancient land of Arabs, massacres and mysteries! We offer Packet 25 different Persia, including scarce beautiful colored stamps, many high values; also set unused aeroplane stamps; also fine packet 50 all different, including Nyassa, Kenya, Uganda, Gold Coast. This entire big lot for 16 cents, but only to approval applicants furnishing references. Scout number O .K. Extra! Scarce Hayti stamp, catalogued $1, free with every order sent immediately. Act Quick! Send 6c for $20 Mexican Revolution bill and price list of stamps and coins. Russian coin 7 cents; Three different European coins 16c; Two different South American coins 15c. Reimers, 100 Flatiron Bldg., Fort Worth, Texas.

ROYAL Surprise Packet, 10 French Col., 10 British Col., 10 Post. Col., Small Album, 250 Hinges, Perforation Gauge and Millimetre Scale and a packet of 100 Diff. Stamps, all for 10c to new approval applicants. Royal Stamp Company, 6020 Broadway, Dept. P, San Antonio, Texas.

500 MIXED Stamps from 40 different Countries, Australia, North, Central, and South America, Russia, Africa, China, Japan, British, French, Colonies, War Issues, etc.; also 500 stamp hinges, pocket Stock Book, perforation gauge, and 3 United States stamps issued before 1872, all for 25c. Biggest bargain ever offered. Satisfaction guaranteed or money back. Hussman Stamp Co., Dept. P. M., St. Louis, Mo.

FAMOUS Fenway Outfit, All for 12c; triangle stamp; small album; 250 hinges; 5 large French Colonials; 2 special deliveries; Airmail set; Red Cross set; Fantastic Fenway Packet containing 55 different, including Abyssinia, Azores, Cape of Good Hope, Bosnia, Crete, Congo, etc. This wonderful outfit and 16-page price list only 12c; to new approval applicants. Fenway Stamp Co., 161 Massachusetts Ave., Boston, Mass.

START a Stamp Collection—70 different stamps from 70 different foreign countries, including Africa, Asia, Australia, Europe, West Indies, etc. Our pamphlet which tells "How to make a collection properly," and price list of albums, packets and sets all for only 16 cents. Queen City Stamp Co., Room 36, 604 Race St., Cincinnati, Ohio.

BEST one-cent approvals in America. P. P. Hand, 1117 So. 60th St., Philadelphia, Pa.

BREAKING up dealer's stock, $10.00 catalogue value, all different, $1.00. Passmore, 126 So. Beachwood Dr., Los Angeles, Calif.

FREE Packet Containing stamps from Turkey, Newfoundland, Canada, etc., to new applicants for our 50 and 60% sheets. Enclose postage 2c. 1,000 best hinges 10c. George Flagg, Box 2991, Boston, Mass.

SEND 30c for my special PM packets and free premium. My 1c net and 50% approvals always please. References please. Cedric W. Lemont, Delaware, Ohio.

HAWAIIAN Stamps. Rare Packet $1.00. Hawaiian Exchange, Box 2777, Honolulu, Hawaii.

$20.00 FOR $1.00. Selected assortment of 1,000 different stamps guaranteed to catalogue over $20.00, for only $1.00 to approval applicants. Edgewood Stamp Company, Milford, Conn.

100 DIFF. Stamps to approval applicants, for 2c. Free Bymor Bargain Lists. We Want Collections. Bymor Stamp Co., Dept. P, St. Louis, Mo.

105 CHINA, etc., stamp dictionary, list, 2c. Album (500 illustrations), 5c. Bullard, Sta. A, Boston.

DANZIG Stamps — Splendid assortment Independent State Danzig free for 2c. Fifty British Colonies, 15c. Midland Stamp Company, Toronto, Can.

TEN Large and Showy stamps Free. Postage 2c. Payn Stamp Co., 945 Vista Drive, Los Angeles, Calif.

FREE! Dandy foreign packet, 2c postage. Hart's, Mayberry Ave., Medford, Mass.

PENNY Approvals that Satisfy. Neil Grosberg, Box 5441, Philadelphia, Pa.

207 DIFFERENT Stamps, pocket wallet—10c, to approval applicants. Panhandle Stamp Co., Perryton, Texas.

FINEST One Cent Approvals in the United States. Stanton, Niantic, Conn.

24 VARIETIES Cuban stamps, 10 cents. List of 6,000 low-priced stamps free. Address Chambers Stamp Co., 111P, Nassau St., New York City, N. Y.

STAMPS, 100 all different. Postage 2c. Lists free. P. M. Quaker Stamp Co., Toledo, O.

STAMPS! Big Bargains! 50 diff. Nyassa, Fiume triangle, etc., and Perf. gauge only 5c; 15 Uruguay 12c; 8 Nyassa, beauties, 8c; 25 French Cols. 10c; 50 Br. Cols. 10c; 40 Africa 12c; 10 Iceland 12c; 500 diff. foreign 30c; 1,000 diff. $1. All above, cataloging about $50, only $1.70. My choice 50% approvals with all orders. List free! L. B. Dover, Clayton, Mo.

500 MIXED U. S. and Foreign stamps 11c. R. H. Carlton, 366 W. So. Temple, Salt Lake, Utah.

SELF-CLEANING Stamp Hinge Moistener. $1.25 postpaid. Agents wanted. Rempe Mfg. Co., 2827 Myrtle St., Oakland, Calif.

FREE—50 varieties to approval applicants sending 2c. Richard P. Lamprecht, Valparaiso, Ind.

BORNEO Rhinoceros, Australian Kangaroos and 101 Differnet Foreign, Hinges, 13c., to Approval Applicants for 10c; 50 Different U. S. 10c. Moseley, Bloomfield, Mo.

THREE Irish stamps free to Approval buyers. 300 different stamps 25c. C. H. Hollister, Mukwonago, Wis.

COVERTCO Packet, 250 varieties unused and used stamps 15 cents. Covert Stamp, 39 State, Rochester, N. Y.

200 DIFFERENT stamps from many countries, catalog value about $4.00; only eight cents to approval appliants. H. W. Myers & Co., 2931 Acton St., Berkeley, Calif.

FOREIGN Stamp Collection Sent Free. Cornish Co., Schenectady, N. Y.

STAMPS sent on approval at 70% discount. Reference required. Emory Benoli, Hanover, Pa.

500 DIFFERENT 25c; 1,000 Different 85c. Grossman, 1568 First Ave., New York City.

CURIOSITY Packet, 101 unused in blocks 12c. Big 20-page List, set Air Mails Free. Rueger, 31 Cumbridge, Dayton, Ohio.

FREE, Hungary Charity No. 565 to 567 and a surprise packet given to those requesting for my 1, 2 and 3c approvals and also my 50% discount and better. Chas. W. Schmidt, 3227 Benner St., Wissinoming, Philadelphia, Pa.

300 DIFFERENT $.25; 500, $.50; 1,000, $1.00; 2,000, $4.00. Fred Onken, 630 79th Street, Brooklyn.

FREE! Loose Leaf Postage Stamp Album at rate of 8 pages each month given with subscription to monthly Journal. Send 2c stamp for prospectus. United Stamp Co., Marquette Bldg., Chicago, Ill.

STAMPS, 50 varieties, Africa, Brazil, Peru, Cuba, Mexico, etc., 10c. 50 different U. S., 25c; 1,000 mixed, 40c; 1,000 hinges, 10c. List free. C. Stegman, 5948 Cote Brilliante, St. Louis, Mo.

ZAMBESIA, Zanzibar, Abyssinia, Herzegovina, Allenstein stamps, menagerie collection, album, 10c. Liberty, 3974 Arsenal, St. Louis, Mo.

PACKET of 23 stamps, no two countries alike. Packet hinges. Set of $1 and $2 U. S. Rev., all for 5c. P. M. Miami Stamp Co., Toledo, Ohio.

20 UNUSED stamps free. All different. Postage, 2c. P. M. Fisk Stamp Co., Toledo, Ohio.

STAMPS on approval—½c up. Free Premium. Herbert Keigwin, Middletown, N. Y.

25 PRECANCELS—and copy "Badger's Precancel Partner," 4c to approval applicants. Badger's Partner, Brooksville, Fla.

FIVE unused sets, including "War Prisoners," Airmail, Eagles, Dues, Pictures; 5 French, 5 British, 5 Portuguese Colonies; 4 Salvador, including triangle; 100 different, only 15c to approval applicants. Deering, 17 Newton, Marlborough, Mass.

110 DIFFERENT Stamps, many unused, high values, free to collectors requesting our Net Approvals. Postage 2 cents. Christensen, Milwaukee, Wis.

1,000 U. S. AND Foreign Stamps 25c. Phil. Lundsted, Cape Cottage, Maine.

110 NEW Europe, All Different, a wonderful collection cataloguing several dollars, free to collectors requesting our Net Approvals. Postage 2 cents. Badger Stamp Co., Milwaukee, Wis.

100 DIFFERENT stamps free to applicants for low-priced approvals. Westland Stamp Co., 70 Westland Ave., Boston, Mass.

1,000 UNITED STATES and Foreign Postage Stamps for Stamp Collectors. 25 Cents. C. W. Parker, 77 Kensington Heights, Meriden, Conn.

Copyrighted material

RARE COINS

OLD Money Wanted. Will pay Fifty Dollars for nickel of 1913 with Liberty Head (not Buffalo). We pay cash premiums for all rare coins. Send 4c for large Coin Circular. May mean much profit to you. Numismatic Bank, Dept. H, Fort Worth, Tex.

GET Profit and Pleasure in collecting Old Coins. Send 10c for Sample Old Coin, together with my Large Illustrated Coin Catalogue. You'll be delighted with it. Send for it right now. B. Max Mehl, Professional Numismatist, Mehl Bldg., Dept. P, Fort Worth, Texas. Largest Rare Coin Firm in U. S.

CALIFORNIA gold, $\frac{1}{4}$ size, 27c; $\frac{1}{10}$ size, 53c; three-cent-piece and catalogue, 10c. Norman Shultz, Colorado Springs, Colo.

40 OLD coins, all different, $1.00. 10 Different date, Large cents, 60c. 100 different Austria City Bills, 25c. List Free. Claud Denney, Box 315, Dallas, Texas.

PRICE Lists Wild Cat Bill and Confederate 10c. 10 Foreign Copper Coins and German Bill 25c. California Gold $\frac{1}{4}$, 27c; $\frac{1}{2}$, 53c. 100,000 German Mark, 10c. Al. E. Bonsall, Richmond, Ind.

SELL European Bonds, Money, Coins, by mail, and agents. Tremendous Profits! Circulars free. $1.00 brings big bundle samples everything. Hirschex, 70 Wall St., N. Y.

UNITED STATES 2c Bronze and bargain Price List 10c. M. Arey, Box 483, Muskogee, Okla.

OLD Coins, Large Spring Selling catalogue of coins for sale free. Catalogue quoting prices paid for coins, ten cents. William Hesslein, 101A Tremont Street, Boston, Mass.

3c NICKEL 10c. Villa Bill and price list 10c. Joseph Brango, 440 19th Street, West New York, N. J.

SCENERY TO RENT

SETTINGS for Opera, Plays, Minstrels. Plush drops. Address Amelia Grain, Philadelphia.

FOR BOYS

MOUTH-ORGAN Instructor, 25c. Sixteen big pages; eighteen musical selections. G. Elsea, Bowling Green, Ohio.

KITES. Eight kinds of kites are fully described in Outdoor Sports the Year 'Round, Popular Mechanics new book. The descriptions are so clear and so well illustrated that any boy can make the kites by following the simple instructions. The following kites are described: box kite, boy kite, girl kite, festooned kite, butterfly kite, Chinese kite, combined kite, eight-pointed star kite, and other articles such as parachute drop for kite. This book contains over 200 other articles on outdoor sports. Send No Money. Simply write a postal, if you live in the U. S. When the postman hands you the book, give him $1 plus the few cents postage. Popular Mechanics Press, 200 East Ontario St., Room 806, Chicago, Ill.

CAMERAS AND PHOTO SUPPLIES

PHOTOGRAPHIC equipments and accessories of every description are listed and illustrated in our 228-page catalogue. It will pay you to secure a copy which is issued free, as our prices are low. We also deal in used goods which are sold under the same guarantee as new goods. Ask for our Bargain Book. Central Camera Co., Dept., E-95, 112 S. Wabash Ave., Chicago, Ill.

GET Acquainted Price. Send Roll, and 10c for six beautiful glossy prints. Only one roll to a customer at this price. This offer expires July first 1925. Young's Studio, Versailles, Mo.

SUPERIOR quality finishing. Trial offer: Any size 6 exposure roll developed and printed, 25 cents. One only 8x10 enlargement unmounted from negative, 35 cents. Carkhuff Photo Finishing Co., 2129 W. Van Buren St., Chicago.

PHOTOGRAPH taken easily without films. New discovery. Save money. Original photograph in colors and complete instructions $1. W. Wilkinson, Clarkson, N. Y.

TRADE AZ-U-LYK-M Mark. Send your next Roll Film and 25c. Will make Six Prints, one hand-tinted Free. AZ-U-LYK-M Photo Service, Bristol, Vt.

SPECIAL, Souvenir album of wartime pictures free with one developing and printing order of any six exposure roll with 35c coin. Photogram Laboratories, Box 185, Newark, N. J.

BIG Money Saved on Photographic Lenses and Apparatus—goods exchanged; repairing done. Ralph J. Golsen, 1128 Argyle St., Chicago, Dept. P.

HAVE You a Camera? Write for Free sample of our big magazine, showing how to make better pictures and earn money. American Photography, 116 Camera House, Boston, 17, Mass.

FILMS Developed. Special Trial Offer. Any Size Kodak film developed 5c, prints 3c each. Trial 6x10 Enlargement in handsome folder 40c. Overnight Service. Roanoke Photo Finishing Co., 209 Bell Ave., Roanoke, Va.

KODAK Films—Special trial offer; your next kodak film developed, 5c—prints, 2c each. Moser & Son, 1917 St. James Ave., Cincinnati.

MODERN Photography in all its branches now taught by mail. New Successful Method. Students earning $300.00 while learning. Big opportunity. Write for particulars and unusual offer open for short time. Dept. 1351, International Studios, Inc., 3601 Michigan Ave., Chicago.

VELOX Glossy Prints. Don't confound with those made on cheap papers. 30 cents for developing 6 exposure roll, 2¼x3¼, including 6 prints. 35 cents 2½ or 3¼x4¼. 40 cents for Vest Pocket or Postcard size. Twelve exposures Double price. W. L. Champlin & Son, 6950 S. Carpenter St., Chicago, Ill.

BETTER Photo Finishing. Send one roll film and 15c for trial offer. Moore's Photo Studio, Alstead, N. H.

MOTION PICTURES

FILM—Film—Film. You will find what you want at the lowest prices on our new big list—it's free. Monarch Theatre Supply Co., Dept. P. M., 724 So. Wabash Ave., Chicago, Ill.

COMPLETE moving-picture outfits, everything for the theatre, school, church and traveling show, sold on easy payments. Free catalog. Monarch Theatre Supply Co., Dept. M.A., 724 So. Wabash Ave., Chicago, Ill.

MOVIE films. 1,000 ft. reels. Complete stories, $2.50 each; shipped anywhere on receipt of remittance with order. Independent Films, 177 Golden Gate Ave., San Francisco, Calif.

MOVIE Camera $40; Panorama and Tilt Tripod $22; Automatic Spring Worked Movie Camera, $50. Home Projector, 1,000 foot, $37.50. Films, 800 feet, $30. Movie Printer $25. New Theatre Projector, $50. Kodaks $5. Ray, 296 5th Ave., New York.

TOY Film $3.00 per reel. Delux Film Service, 2529 August St., Chicago, Ill.

NEW and Rebuilt Machines for Big Theatres — Schools — Churches — Traveling Shows. Also Films—Supplies and Complete Theatre Equipments. Bargain List Free. Monarch Theatre Supply Co., Dept. P, Memphis, Tenn.

MAKE money writing photoplays; details free to beginners. No correspondence course. Producers League, 230 Wainwright, St. Louis.

$35.00 PROFIT nightly. Small capital starts you. No experience needed. Our machines are used and endorsed by government institutions. Catalog free. Atlas Moving Picture Company, 482 Morton Bldg., Chicago.

BIG Money Nightly—Good assortment, Complete Outfits, installment plan. Splendid Home Outfit, $25.00. Good Movie Camera, $37.00. Ralph J. Golsen, Dept. M, 1128 Argyle St., Chicago.

FILM—Million Feet for Sale. Cowboy—Drama—Comedy and Feature Specials. Mix—Hart—Chaplin and best Movie Stars. $3.00 per reel up. Genuine List Free. We Supply the World. Dept. G, Monarch Films, Memphis, Tenn.

DON'T fail to send for the big Free Bass Book of Cinema Apparatus. The Cyclopedia of M. P. Cameras and Projectors. Get in the game that has made thousands independent. Write or wire for your copy. Bass Camera Company, 105 N. Dearborn St., Chicago, Ill.

$$$ FOR Ideas. Photoplay plots accepted any form; revised, criticised, copyrighted, marketed. Advice free. Universal Scenario Corporation, 206 Security Bldg., Santa Monica and Western, Hollywood, Calif.

EVERYTHING for "Movie Man" including Film Service, lowest prices, bulletin Free. "Grobarick," Dept. P, Trenton, N. J.

EDUCATIONAL AND INSTRUCTION

BE a Laboratory Expert. Earn $300 to $500 monthly. Study Microbiology, Sanitation. Day, Evening Classes. Diplomas, Degrees Granted. Free 71-piece outfit to Students. Write for free Prospectus Today. International College of Microbiology, 2126 Lincoln Ave., Chicago.

WORLD-ROMIC System, Masterkey 5,000 languages. Primers, $1.98. Alphagams, 50c. Arabic, Chinese, Danish, Dutch, French, German, Greek, Hindustani, Italian, Japanese, Latin, Norwegian, Polish, Portuguese, Russian, Sanskrit, Spanish, Swedish. Languages Publishing Company, 8 West 40th, New York.

LEARN a Trade That Pays 75c-90c an Hour. Suitable for Either Sex. Particulars Free. Interstate Spec. Co., 117-119 E. 8th St., Lawrence, Kans.

USED Educational Matter; save over half. Bargain catalogue 1,000 courses free. Used courses bought. Students' Exchange, Dept. A, 47 West 42nd St., New York.

PRACTICAL Psychology Teaches Hypnotism, Personal Magnetism, Magnetic Healing, Auto-Suggestion, Cure Habits and Disease. Easy Lessons. Send for Booklet. 4 cents stamps. Fernando, Dept. M, Springfield, Mass.

LOOK! Improve your handwriting! Instructions 25c (silver). Prince, 130 W. 104th, New York.

"TRICKS of Trades" Drawing, Lettering. $1.00. Free particulars. Freeburn, Artist, Hicksville, Ohio.

SELF-INSTRUCTORS, complete, easy—Spanish, Italian, French, Square Dancing, Boxing, Baseball Pitching, Etiquette, Violin, Piano, Drums, Accordion, Harmonica, Ocarina, Ukulele, Saxophone—25c each; any five, 97c. G. Elsea, Bowling Green, Ohio.

ROPP'S Calculator and Short-Cut Arithmetic shows the answer as quickly as a watch shows the time to all problems likely to occur in office, store, shop, bank, farm or factory. Price, pocket size, leatherette $1. Desk size, cloth, $1.50 postpaid. Send No Money. Simply write your order on a postal, if you live in the U. S. When the postman hands you the book, give him the price plus the few cents postage. Popular Mechanics Press, 200 E. Ontario St., Room 806, Chicago, Ill.

RAILROAD Postal Clerks start $155 month, railroad pass. Send stamps for questions. Columbus Institute, E-2, Columbus, Ohio.

EARN $25 weekly, spare time, writing for newspapers, magazines. Experience unnecessary. Copyright book free. Press Syndicate, 981-A, St. Louis, Mo.

USED educational matter. Lowest prices; terms; Catalog free. Mention Subject. Economy Educator Service, 440-A Sansome, San Francisco.

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 311 A. B. E. Building, Grand Rapids, Mich.

USED educational matter bought, sold, exchanged. Hamfling, 799 Broadway, New York.

USED educational matter, books, etc., bought, sold, rented and exchanged. Big list free. Lee Mountain, East Chattanooga, Tenn.

ARTIFICIAL Marble sanitary flooring instructions, ornamental casting, concrete, plaster, papier-mache decorations, garden furniture, statuary, Rubber-moulds. 15 years' instruction the public, particulars and 200 illustrations free. Chris Mahler, Huntington, N. Y.

"WHAT to Invent for Profit" free. Patent News-N, Washington, D. C.

DOUBLE Entry Bookkeeping mastered in 60 hours with 8 keys; guaranteed; diplomas. International Bookkeeping Institute, Dept. 8, Springfield, Mo.

YOU can have a business profession of your own and earn big income in service fees. A new system of foot correction; readily learned by anyone at home in a few weeks. Easy terms for training; openings everywhere with all the trade you can attend to. No capital required or goods to buy, no agency or soliciting. Address Stephenson Laboratory, 1 Back Bay, Boston, Mass.

TELEGRAPHY

TELEGRAPHY—Both Morse and Wireless—taught thoroughly and quickly. Tremendous demand. Big salaries. Wonderful opportunities. Expenses low; chance to earn part. School established fifty years. Catalog free. Dodge's Institute, H St., Valparaiso, Ind.

RADIO OUTFITS AND SUPPLIES

SET builders and experimenters—Cash in under our system. One Dollar gives option on territory and complete deatils. Write at once before your territory is allotted. National Radio Service System, Box 17, Haverhill, Mass.

Copyrighted material

RADIO Receiving Sets easily built by anyone—it is inexpensive and takes but two hours of your time. No experience necessary. Under the free personal guidance and instruction of our experts you can build your own radio receiver and can hear music, lectures, news; also weather, market and foreign reports from thousands of miles away. Our bargain list, diagrams, hook-ups, illustrations and a wealth of other information while they last, sent to you for a two-cent stamp. Address the Radio Shack, 55 Vesey St., Dept. G281, New York City.

BUILD Radio Sets. Many fans are earning money building our high-grade Super-Selector set. We provide apparatus, blue prints and expert advice. Very profitable. Address The Langheim-Kaufman Radio Co. (Dept. N.), 511 Chapel St., New Haven, Conn.

A REAL Buy while they last. Fortunate purchases from the government and other large users of the un-acid Edison Storage batteries, at a real fraction of their original cost. The only storage battery that has none of the common diseases, does not sulphate or lose charge standing idle. The ideal battery for motor-boats, farm lighting and radio. Fully guaranteed and sold further on a 30-day trial of complete satisfaction or your money refunded without any ifs, and or buts. All voltages and amperages. State size desired. Not a glass or rubber cell, but nickel-plated steel container—built like a watch. For complete information and guarantee address B. P. Smith, 31 Washington Avenue, Danbury, Conn.

LOUD Speaking Crystal Set. Broadcastings, heard throughout house. Easily constructed. Book diagram, 25c. Catalog free. Steinmetz Wireless Mfg. Co., Eastend, Pittsburgh, Pa.

200,000 SATISFIED customers hear distant stations on Lambert Crystal Sets. Copyrighted plans $1.00. Complete kit and plans $5.00. Leon Lambert, 539, Wichita, Kans.

CABINET sets $4.00. Nolte Mfg. Co., 61-A Gautier Ave., Jersey City, N. J.

TUBES—new. Regular $3.00 value, all types, $1.75. Postpaid. Ohio Radio Sales, 3311-A Superior, Cleveland, Ohio.

DEMONSTRATORS, Radio, wanted, Amateurs, professionals, see Radio Shack advertisement, page 127.

2,650 MILES Distance with one tube. Any Novice understands our Simplified Instructions, including Panel Layout and Photo 25c. Vesco Radio Co., Box 117-PM, Oakland, Calif.

EARN money at home building Radios. Any one can. No extensive technical experience necessary. Send for free booklet "Radio Builders Guide," with popular hook-ups and parts needed priced at wholesale. Sertin & Co., 1417 Broadway, Detroit, Mich.

BIG profits recharging radio and auto batteries. Outfit, easy payments. Hobbarts, Troy, Ohio.

RADIO outfit, complete, $7.50 prepaid. Durso, 25 Mulberry, New York City.

TRADE AND TECHNICAL SCHOOLS

LEARN How To Earn More Money. Find out how to read blue prints in your trade and become a Foreman. Now is the time to prepare for one of these big jobs. Write now, tell me your trade. Find out how to get to the top in your trade. Be a Draftsman—Earn $35-$100 a week. I furnish you with books and tools. Write for information. C. L. Rumsey, 160 Drexel Bldg., Philadelphia.

ENROLL in the Greatest School of its kind in the United States, and get a training in a few weeks that other tradesmen have spent years to learn. Our instructors are experts in their lines and impart their years of experience to you in such a short time that it seems almost impossible. Complete practical courses in Sign, Scenic and Pictorial Painting—Interior Decorating—House Painting — Auto Painting — Paperhanging—Graining and Marbling and Show Card Writing. New Catalogue just out and free. Chicago Painting School, Dept. A 936, 148 W. Austin Ave., Chicago.

MEN Wanted—Pay $8 to $16 per day—Electricians, Plumbers, Bricklayers, Plasterers, Auto Mechanics, Ignition Experts, Auto Trimmers and Upholsterers. You can qualify for one of these jobs after a few weeks of "Standard" training. Jobs found for students while training. Write today. Standard Trade School, 416 Woodward Ave., Detroit, Mich.

CHICAGO Technical College offers short, intensely practical courses in Drafting and Engineering—civil, mechanical, electrical, structural—Architecture, Building, Construction, Plan Reading, etc. Courses fitted to your needs. No time wasted. Instructors are experts. Graduates in demand at big salaries. Opportunities for part-time work while studying. Day and evening classes, 22nd year. Enter any time. No special preliminary training required. Low tuition—easy terms. Write for 52-page illustrated Blue Book, describing opportunities open to our graduates. Chicago Technical College, 25 Chicago Tech. Building, Chicago.

PLUMBING is quickly, thoroughly and easily mastered under our practical "Shop Methods" system. Big demand. Fine wages. Day and night sessions. Write today for details and amazing offer. Kansas City School of Plumbing, 1714 Baltimore Ave., Kansas City, Mo.

NO Matter What Trade you are interested in, you can get help from Personal Advancement magazine, published by Popular Mechanics and sent free to all who request it. Will help you decide upon a vocation. Send your name and address on a postal to Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 312 A. B. E. Building, Grand Rapids, Mich.

BUSINESS OPPORTUNITIES

IMPORT Your Own Goods. Big German export magazine, published in English, offers thousands of bargains latest novelties. Sample copy, 50c. P. Abea Specialty Co., 263 Fifth Ave., New York.

LEARN Purcraft—Big Profits Waiting In Every Community. Easily Learned at Home in Your Spare Time. Get into a High-Grade Business for Yourself. Uncrowded Field. No Peddling nor Soliciting. We Teach You How. Be First. Write Today for Illustrated Booklet. It Is Free. No Obligation. Northwestern Fur Co., Suite R, Sunderland Building, Omaha, Nebr.

AGENTS—$12 daily easy, taking orders for Largest Line New Style Guaranteed Hosiery. Cotton, Lisle, heather, silk. All latest shades and colors. Mode, Airedale, Windsor Tan, Russian, Congo. Prices greatly reduced. Special premiums to purchasers make sales easy. Send for Proof of Profits—Free. Macochee Company, Station 2587, Cincinnati, Ohio.

SCHEMER, Alliance, Ohio, prints Big profit schemes, one subscriber making $25,000 from three; another $10,000 from one. Try your luck. Three months, 30c; copy 10c.

$3,000 TO $6,000 Yearly. Want it? Others are making it. Send check or money order today for our invaluable books "How to Sell Real Estate." $3.00—and "How to Conduct Real Estate and Insurance Business," $1.50. Absolute satisfaction guaranteed. Free circulars. Realty Book Co., Dept. 52, Cleveland, Ohio.

GREAT Big Mail 10c. M. Casden, Box 432, Muskogee, Okla.

DISTRICT Managers Wanted in Every City in the World to Organize Groups of Agents to Sell our Fountain Pens. International Advertisements now going to Press; Managers' Profits Exceptionally Lucrative. One Dollar Brings Samples and Prospectus. Desk A, Famous Pen Company, 551 Harvard St., Rochester, N. Y.

START Mail Order or Agency business. Costs 5c. Sells for $1. Particulars free. Write Merry A, Box 817, Somerville, N. J.

FREE Booklet describes 52 plans for making $20.00 to $100.00 weekly in home or office busines of your own. Downs Co., 2227 Myrtle, St. Paul, Minn.

DOLLARS by mail! We will show you how we get them. Royal Sales Service, Canisteo, N. Y.

NEW Business—Nothing like it—Prefer men familiar with Radio. One Dollar secures option and instructions. National Radio Service System, Haverhill, Mass.

SPLENDID New Business. Manufacture Tiffnay Radio Crystals; sell dealers; demand enormous; profits unequalled. Make $10 to $20 day spare time. We supply everything; build can make them. Opportunity you have dreamed about. Write quick. Chapman Radio Co., Phelan Bldg., San Francisco, Calif.

START Mail Order Business—We Tell How. Mail Order News, 500 Fifth Ave., New York.

MANUFACTURER requires thoroughly reliable manager to open office and supervise salesmen. We protect you in territory. $500 to $1,000 necessary. Expenses paid to Los Angeles if you qualify. Address Manager, Suite 677, 124 W. 4th St., Los Angeles, Calif.

PATENTS Procured; Trade Marks Registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 30 Owen Bldg., Washington, D. C., or 41-R Park Row, New York.

FOR Workers. Here's a New, Different, Superior, Money-Getting Plan that Wins! Clean, sure, quick, unlimited. Your investment for this plan only $2.00. Every detail given. Get it today. Guaranteed. Or send for big circular which tells the facts fully. Pacific Publishing Co., Prineville, Oreg.

INVENTOR'S Universal Educator contains 900 mechanical movements; 40 perpetual motions. Tells how to obtain and sell patents. Suggests new ideas. Explains how to select your attorney and avoid patent sharks. Special price (for a limited time) $1.00 postpaid. Albert E. Dieterich, 621-C Ouray Bldg., Washington, D. C.

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5833 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

INCREASE Your Earning Capacity. Write for my Plan that makes the Discontented, Unhappy Failure a Success. I can Show You How to Get the Position You Want. Information Free. Craig Maxwell, 128 W. 75th St., New York City.

WHY work for others? Mirror Resilvering Simplified. Book of instructions $1.00 prepaid. C. W. Steene, Mirrors and Glass, 230 East Water St., Syracuse, N. Y.

MEN, Women, make big money. Free particulars, write, Advertiser, 61 Pulaski, Buffalo, N. Y.

INCREASE Your Business! Send 10c today for Sample Suggestions; Get Posted and Make More Money. Satisfaction or Dime Refunded. Edward Harrison, "Attractive Labels," Baltimore.

BE the first in your territory. One Dollar gives option and instructions. Don't delay. National Radio Service System, Box 17, Haverhill, Mass.

WANT Money? — Selected Opportunities Tells How. $1.00. Mitchell, 145 Chestnut, Red Bank, N. J.

EASY Money! Silvering mirrors, auto parts, tableware. Outfits; Plans Free. Sprinkle, Plater 127, Marion, Ind.

SAWDUST and Chemicals make Sanitary flooring. Profitable business. Directions $1.00. Universal Supply Co., Auburn, N. Y.

TEN Supply sources, 10c coin or stamps. Valuable mail order information. Circulars. Demuth Company, Englewood, N. J.

MAKE-Sell Your Own Goods—Formulas, Processes, Trade-Secrets. Modern master methods. Catalog free. B. Thaxly Co., Washington, D. C.

20 GUARANTEED money making plans, $1. West, Box 105, Columbus, Ind.

PUBLISH a Magazine of your own and start a Mail Order business on $1.00 capital. Sample magazine and plan 25c. Robert Cohen, Box 483, Muskogee, Okla.

START Mail Order Business. Watch yourself Grow. List 5c. Sells by Mail for $1. Particulars 10c. Lyle Kelso, 948 Alpha St., Inglewood, Calif.

I WILL START you in mail-order business. Particulars Free. Dept. 101-Realine Co., 58 W. Washington, Chicago.

YOU can receive 25 letters daily, each containing $1.00. Wonderful legitimate plan. Particulars free. Tick, 2338 Arkansas St., Oakland, Calif.

BUY—Exchange—Sell! Many of our readers have for sale or exchange the article you are looking for—and lots of them are looking for the very items you want to turn into cash. Get together! Let our two million readers know your wishes—they'll help you! Send your ad today to Geo. F. Baker, Manager Classified Advertising, Popular Mechanics Magazine, Chicago.

Copyrighted material

GET Money in Your Mail. "Lambert's Mail Order Secrets" contains successful methods never before published. $1.00 postpaid. Particulars free. Leon Lambert, Wichita, Kans.

INCREASE Your Earnings. Operate a collection agency. Large income; quick returns. Learn how from one who did it. Write George H. Cole, Gurney Bldg., Syracuse, N. Y.

"COPYRIGHT 1925" by Surety Service, 551 Harvard St., Rochester, N. Y. $1-Brings Proposition.

"COPYRIGHT 1925" by Surety Service, 551 Harvard St., Rochester, N. Y. $1 Brings Proposition.

GET Money in Your Mail. Quick Profit, Honest Guaranteed workable Mail Order Plans and complete instructions $1. E. Noon, 131-A, Windsor, Va.

MAIL Order Booklet, where to buy Books, Novelties, Specialties, 10c. Harvey Teeple, Decatur, Ind.

NEW Mail Order Plan Brings quick, steady income, spare time or full time. Permanent, positive and profitable. Details complete $2. Circular telling all about it free. W. H. Blair, Box 5, Lamoni, Iowa.

BY Our Sales Plan Salesman's Commission was $4,000.00 in 60 Days! Plan Free with Yearly Subscription to Magazine at $1.00. Home Magazine, Nashville, Tenn.

ANY Desired Formula $1.00, guaranteed. Central Laboratories, 233P, Champaign, Ill.

EARN Big Pay—Be an Expert Interior Decorator. Repaint, Retrim, Clean automobiles quickly. Learn at Home. Many steady positions open. Particulars Free. Auterence, Sheboygan, Wis.

QUICK Money, sell everywhere. Writing Device patented, beautiful $1 article. Fortune for Canvasser or Mailorder. Box 527, Wallace, Idaho.

YOUR Own Profitable New Business. No competition. No capital. Easy terms for few weeks training by mail. Crosskey Protection System, 1595P, Richmond, Calif.

SELL Copyrighted Information By Mail. 700% profit. Printed Matter Furnished. Fascinating Business. Big Possibilities. Particulars Free. G. R. Hinds, Monticello, Ill.

ARE you old at forty? See our advertisement on page 147 of this issue. The Electro Thermal Company, 2137 Main St., Steubenville, Ohio.

BEFORE trying any "Start your own business" plan, investigate our offer. R. Goods Co., St. Louis, Mo.

INVENTIONS fully protected two years $15 total cost. Particulars free. Patent News-K, Washington, D. C.

BUILD splendid business making chipped glass number and name plates, signs, medallions. Write for particulars. Simplex Utility Co., 1133 Broadway, New York.

SPARE-TIME Workers—67 plans with instructions to make money in spare time. Also 29 trade secrets, all for 25c. Astrolite Company, Dept. 24, Sharpsburg, Pa.

SEAL Rupture with a Quarter. Amazing invention, weighing less than one-twenty-fifth of an ounce, banishes old-fashioned trusses, harnesses, so-called cushions, and other heavy make-shift devices. For particulars see ad on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

FINANCIAL success can only be obtained in the manufacturing business. It is easy. We show you how. Trade and Professional list free. Lancos National, Syracuse, N. Y.

BEVERAGES Our Specialty; Formulas, Everything; Syrups, Extracts, etc. Other processes. Free information. The Formula Co., Western Dep't: 122 West Howe St., Seattle, Wash.

LEARN to Paint Your Own Pictures any size, from snapshots, photographs, scenes, animals, anything in one hour's time. No knowledge of painting or drawing required. Easy, fascinating, profitable. Travel, make big money teaching others. Full $5 instructions for $1.00. American Sales Company, Box 1278, San Francisco.

ATTENTION!! You can have a business of your own. Establish and operate New System Real Estate Business, brokerage and insurance agency in your community. Office at home. Earn $5,000 year. Representatives wanted everywhere. Send stamp free booklet. Hayes Realty Association, Cincinnati, Ohio.

MANUFACTURE Millerite! Ethyl-Super-Fuel Ingredient for Gasoline. Increases Power, Mileage—saves gas—easily mixed—profits great—valuable Formula Literature of this, Lightning Electrolyte, Kor-Kit, Pro-Tex-U, Amazon Rubber Repair, and fifty other Biggest selling Specialties in all lines will be sent on request. Miller, Chemist, 1115 Grand Central Ave., Tampa, Fla.

MAIL Order Business, No part time, or house to house methods. Particulars on request. Hugh Allison, Box 6, Station A, San Diego, California.

GOLD, Silver, and Colored Sign Letters for windows, automobiles, trucks. Make them yourself with our Process and Letter Patterns. Fast Sellers. Big Profits. No Experience. Stamp brings actual sample. Wilterding, 1144 Pleasant Street, Oak Park, Ill.

INVESTIGATE how $100 quickly developed $2,500 assets. Legitimate. Your buyer pays you cash. Kerr & Company, Monadnock Bldg., San Francisco, Calif.

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 313 A. B. E. Building, Grand Rapids, Mich.

CHEMICAL Expert will furnish Formulas and Trade Secrets. All lines. Lists Free. W. L. Cummings, Ph. D., 228 Gordon Ave., Syracuse, N. Y.

EARN $25 weekly, spare time, writing for newspapers, magazines. Experience unnecessary. Copyright book free. Press Syndicate, 981-B, St. Louis, Mo.

WANTED, Patent Finance. Address W. C., Patent News, Washington, D. C.

INCH Display Advertisement 166 Magazines Year $50. Wood's Popular Services, Atlantic City, (N. J.)

START your own moneymaking business recharging auto and radio batteries. No experience needed. Outfit, easy payments. Hobart, Troy, Ohio.

UNPATENTED Ideas Can Be Sold. I tell you how and help you make the sale. Free particulars (Copyrighted). Write W. T. Greene, 810 Jenifer Building, Washington, D. C.

I MADE $30 a Week Home. French Breadmaking. 15 years' experience; Free Booklet tells. Ashbrook 67, Marengo, O.

LEARN the collection business. Good income, quick results. Interesting booklet, "Skillful Collecting" free. National Collectors Assn., Long St., Newark, O.

"WHAT to Invent for Profit" free. Patent News-C, Washington, D. C.

SIGNS and Showcards Easily painted with Letter Patterns. Large variety of Styles and Sizes. Sample for stamp. John Rahn, A2433 Greenview Ave., Chicago.

INVENTORS—Write for our Guide Book, "How to Get Your Patent" and Evidence of Invention Blank. Send model or sketch of your invention for our free Examination and Instructions. Randolph & Co., Dept. 435, Washington, D. C.

WE Start You in Business, furnishing everything; men and women, $30.00 to $100.00 weekly operating our "New System Specialty Candy Factories" anywhere. Opportunity lifetime; booklet free. W. Hillyer Ragsdale, Drawer 4, East Orange, N. J.

DOLLARS Yearly in your Backyard. No mushroom dope. Particulars free. Metz, 313 East 89th, New York.

EARN $10 daily silvering mirrors, plating and refinishing metalware, autos, chandeliers, bedsteads, headlights. Outfits furnished. E. Decie Laboratories, 1133 Broadway, New York.

MAKE Money at Home—making toys. We show you how. Send $1 for complete working drawings and instructions. Dekalb Designing Co., Decatur, Ga.

GO Into the Crispette business. Everybody likes Crispettes. You can make a lot of money. We start you. Write for facts. Long Eakins, 1959 High St., Springfield, Ohio.

GOOD Money easily earned at home spare time Silvering Mirrors. Glass Embossing, Chipping, Frosting, Gold Leafing, etc. Patterson & Co., Brooksville, Ky.

MARBLE mixing instructions, covering wood or cement flooring ½ in. thick, fireproof, waterproof, low cost, sanitary, all colors. Particulars, 200 illustrations free. Chris Mahler, Box 122, Huntington, N. Y.

COST $5.00, your profit $704.75. Transferring decalcomania letters on autos, trunks, bags, etc. Send today for outfit or free samples. World Monogram Co., Dept. 73, Newark, N. J.

ENTER a new business. Earn $3,000 to $5,000 yearly in professional fees making and fitting a foot specialty, openings everywhere, with all the trade you can attend to; easily learned by anyone at home in a few weeks, at small expense; no further capital required, no goods to buy, job hunting, soliciting or agency. Address Stephenson Laboratory, (1) Back Bay, Boston, Mass.

3,384 MONEYMAKING Plans, Formulas, Trade-Secrets, "Encyclopedia Business Opportunities," 3 Volumes 98c. "Ideal," 5501-PM, North Robey, Chicago.

ADVERTISE, hundred magazines, three issues 10c word. Pennell, Covington, Ky.

POPCORN Poppers—All kinds. Northsides Co., 1306 Fifth, Des Moines, Iowa.

"HOW to Sell Patents" free. Patent News-H, Washington, D. C.

MAKE toys and novelties at home. Big profits. Instructions and 200 illustrations, 25c. Astrolite Company, Sharpsburg, Pa.

FREE Book. Start your own little Mail Order business; home employment evenings. Beginner's Outfit furnished, including 500 circulars, samples, things to sell; you deal with Manufacturers. Also tell easy way to get Agents by mail to sell your novelties. Instructive Book free. Pier, 978 Cortland Street, New York.

RUPTURE Sufferers. Amazing new kind of truss with dot lock makes old-fashioned straps, cushions, heavy cumbersome devices unnecessary. Read announcement on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

YOUR ship will never come in unless you send it out. European Bonds, "The Venture of a Century," bought, sold, cash or installments. Information without obligation. Frank O. Everett & Co., 35 Wall Street, New York.

FORMULAS AND TRADE SECRETS

BEVERAGES Our Specialty. Formulas, Everything. Syrups, Extracts, Flavors. Other processes. Free information. The Formula Co., 122 West Howe, Seattle, Wash.

1,000,000 FORMULAS, 1,016 pages, $1.98. 500 Formulas Free if you order quick. Ideal Book Shop, 5501-PM, North Robey, Chicago.

FORMULAS, processes, in all useful arts, especially Home industries, $1.00 each. North Pacific Distributing Co., Box 167, Seattle, Wash.

MAKE Money; Auto Cleaner Polish. One operation. Cleans, Polishes anything. Positively Guaranteed. Formula, One Dollar. Fiandt & Co., Weslaco, Texas.

50 MAIL-ORDER plans and 450 formulas, 50 cts. Pentland Service, Norwalk, Conn.

250 GOOD formulas 15c; 700 40c. Rodgers Company, 843 Locust, Cincinnati.

500 VALUABLE Formulas 25c. Circulars free. Harvey Teeple, Decatur, Ind.

EXPERT information on Manufacture of Rubber Articles. Ideas, Formulas and Processes Furnished and developed. Chemist, 373 Buckingham St., Akron, Ohio.

FORMULAS that win. Catalogue Free. Pacific Publishing Co., Prineville, Oreg.

MANUFACTURE your own goods. Immense profit. Up to the minute Formulas and Trade Secrets for any line. List free. Lancos National, Syracuse, N. Y.

500 FORMULAS, including Luminous Paint—Renewing Dry Batteries—Mechanics' Soap—Gas Tonic—25c. Catalog Free. Ideal Book Shop, 5501-PM, North Robey, Chicago.

FORMULAS The best Chemical Science can devise—Guaranteed Reliable Processes in all lines. Stamp brings big bunch valuable literature, interesting lists. Don't buy till you see what I can give you. 27 years supplying the best. Miller, Chemist, 1133 Grand Central, Tampa, Fla.

10,000 SELECTED chemical, technological and practical recipes and processes, including hundreds of so-called trade secrets for every business, alphabetically arranged in one large volume of 800 pages. Price $4 postpaid. Send No Money. Simply write a postal, if you live in the U. S., saying that you want Henley's 20th Century Book of Formulas. When the postman hands you the book, give him the $4 plus a few cents postage. Popular Mechanics Press, 200 E. Ontario St., Room 806, Chicago, Ill.

176 PRACTICAL Subjects, how to master any of them. A New booklet giving reliable advice on how to study 176 subjects at home is free. Write your name and address on a postal and say, Send me "An Easy Way to Master 176 Practical Subjects" and mail to Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

Copyrighted material

AGENTS WANTED

MILLERITE: Here it is! You've read about this New Wonderful Ethyl-Super-Fuel Ingredient for Gasoline—Increases Mileage—Saves Gas — Knocks Carbon — Easily Mixed from my simple Formula—profits great—$5,000.00 to $50,000.00 for you if you hurry!! Don't pass this by you'll be sorry—but send today for full descriptive literature of this and other valuable Formula Lists describing latest, biggest selling specialties in all lines as Mendit, Fabric Mending Cement, Marcel Permanent Hair Curling Fluid; Denta-perl Tooth Whitener; Balloons and other thin dipped rubber goods; Flynox—few drops kills roomful flies; Amazon Self Vulcanizing Repair; Pro-Tex-U only Guaranteed Fire Extinguisher; Pure Food Products; Toilet, Medical, Household, Automobile Office Specialties—latest in all lines. 27 years supplying the best in Formulas and manufacturing Information. Highest References. Miller, Chemist, Tampa, Fla.

$125 WEEKLY selling finest, most complete line of men's $12.50 suits, boys' two pants suits $10.95. Guaranteed Union made to measure. Four latest patterns. Also topcoats, vests, caps, riding breeches. Big commissions advanced. Free attractive outfit. Double Service Manufacturers, 1327-35 Y. Washington, Chicago.

$8.50 TO $20.00 daily easy. Introducing New Insured Hosiery for men, women, children. 57 styles, 40 colors. Must wear or replaced free. Repeat orders sure. Nyland made $595 one month. Edwards, $460.60. Mrs. Rose, $445.25. Why not you? Even spare-time work should pay you $3 per hour. Your Pay Daily in Advance. We deliver and collect. You spend all your time writing orders. No experience or capital needed. We furnish samples. All grades, colors including silks. No matter what you are now selling, it will pay you to get our offer. Macochee Textile Company, Station 2567, Cincinnati, Ohio.

AT Last Diamond Rival Discovered! To prove that the Rajah Diamond equals the genuine diamond in all its brilliancy, we will send for ten cents a perfect cut 32 facet One Carat unmounted Rajah Gem. We want 500 Additional Sales Representatives. Send dime or stamps today. "One look is worth 10,000 words." Catalogue Free. Rajah Company, Dept. F7, Salisbury, N. C.

EARN $10 daily with "Miracle," the new, better, different polishing cloth that instantly cleans and polishes all metals without liquid, powder or paste. Saves money, labor, time. Sells on sight at 25c; reorders come quick; big profits; free sample; our free folder tells how to start money coming fast. Oliver P. Gandy Co., Crisfield, Md.

AGENTS, Men and Women, to Sell Our New White Gold-Filled Lingerie Chain. Holds Straps on Shoulders So They Can Not Slip Off. Every Woman Your Sure Prospect. Fast Seller, Big Profit. Agents Make $9 Daily Easy. Wonderful Side Line Item. Write Factory for Full Particulars. Agent's Sample 55 Cents Post Paid. Lingerie V. Company, Box 17, North Windham, Conn.

$15 TO $25 daily is easy with our distinctive, big-selling line of hosiery. Extraordinary values. Extra bonus paid monthly. No experience or capital necessary. Sales kit free. Write Horsey-Bassett Co., 710 Main St., Crisfield, Md.

27,000 RECORDS guaranteed with one Everplay phonograph needle. Preserves records. Abolishes scratching. Day's supply in pocket. $20 daily. Sample on approval if requested. Everplay, Desk T-7, McClurg Bldg., Chicago.

AGENTS, Salesmen, Demonstrators, you will have the devil's own time trying to find a better seller than "Zippo." If there was such a thing we'd have it. Splendid profit on 50c "Go Getter" repeat article that sells on ten second demonstration. Works While You Watch It. Demonstrates value, while others waste time making claims. New discovery! Greatest Scientific Triumph of the age. It's the berries. Haven't room to tell our story here. Write immediately. Karam-Smith Co., 607 Boran St., Ft. Wayne, Ind.

SEAL Rupture with a Quarter. Amazing invention, weighing less than one-twenty-fifth of an ounce, banishes old-fashioned trusses, harnesses, so-called cushions, and other heavy make-shift devices. For particulars see ad on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

$75 PER week demonstrating household necessity. Free Sample. Magic Products Co., 615 New York Life Bldg., Kansas City, Mo.

MYSTOLA, The National Health Drink. Tastes like Grape Juice. Big summer seller at homes, road stands, circuses, carnivals, etc. Everyone likes it. $6.00 can make 128 gallons. Or divide it into 32 bottles and sell for 50c. Each bottle will make four gallons. Four cans for $20, sufficient for 512 gallons, or 128 four-gallon bottles. Prepaid with labels for bottles, etc. Mystol Co., Glen Falls, N. Y.

MARVELOUS New Invention — 400% Profit. Johnson's Liquid Quick Mend. Tremendous demand. Plan Unique. Act quick. Over hundred other fast-selling specialties. J. E. Johnson & Co., Dept. 431, 321 W. Chicago Ave., Chicago, Ill.

AGENTS—At Last a Practical Fire Alarm for the Home. The Automatic Fire Alarm Rings Door Bell when Fire gets near it. So simple anyone can install. $1.00 brings one with instructions. Automatic Fire Alarm Co., Box 195, Duluth, Minn.

AGENTS—$35 cash weekly and a free suit to each agent for taking orders for our high-class made-to-measure tailoring—suits from $14.95 to $39.50 and no experience needed. Write for our big Free Sample Outfit. Progress Tailoring Co., Dept. G-217, Chicago.

MAKE $75.00 A Week and Up, selling our line made-to-measure, all-wool suits—Direct to wearer—all one price, $31.50. Biggest values. Commissions in advance. We deliver and collect. 6x9 swatch samples furnished. Write today. W. Z. Gibson, Inc., Dept. G-157, 161 W. Harrison St., Chicago, Ill.

BIG Profits, New $3.50 Automatic Adding Machine. Quick Sales. No competition. Ten daily easy. Absolutely accurate. Fully guaranteed. Pocket size. Business people everywhere positive customers. Exclusive territory to workers. Act quick. Bassett Company, 1458-G Hollywood Ave., Chicago.

$75 A WEEK Easy! Our toilet articles, perfumes, soaps, extracts, sell on sight, repeat fast. We offer sample case, free goods, premiums, trade stimulators—and big profits. Write for territory today. Sterling Laboratories, 5252 N. Second, St. Louis, Mo.

ANY man handy with paint brush can start furniture refinishing, job painting, handyman shop on nearly nothing; mostly all profit. John Braceland, 1457 So. Ninth, Philadelphia, Pa.

AGENTS: Sell two shirts for price of one. Walton Duplex Shirts are reversible. Make $15-$25 daily. We deliver, collect. Write for "Your Opportunity." Walton-Duplex Co., 537 Brooks Bldg., Chicago.

AGENTS, Salesmen—Sell New Thermostatic Automatic Carburetor Control Attachment for Fords. Big Profit, full or part time. Burns 95% air. Doubles Mileage. Attached in 2 minutes. No drilling. Does automatically exactly what Ford manual says do by hand. Cadillac now using Thermostatic Carburetor Control under Blanche license. Write today. A. C. Blanche & Co., Dept. 805LX, 602 Lake St., Chicago.

WHY work for others? Sell by mail. Let Uncle Sam work for you. Particulars Free. National Enterprises, Box 1174-PM, Omaha, Nebr.

"KKK" Sample pocketpiece 10c. Katalog Kluxer jewelry free. Agents wanted. Morris, Box 1174-PM, Omaha, Nebr.

NEW Silver Cleaner. Instant Action. No rubbing. Sample 25c. Northern Products Co., 505 Superior Bldg., Cleveland, Ohio.

SELL American made Gillette type razor blades at 65c per package. Make 22½c per package. Large repeat business. Sample Free. Fenimore Co., Dept. B, Rm 801, 20 E. Jackson, Chicago.

$50 WEEKLY Selling Greatest Line Silk Knitted Ties Direct to Wearer. De Luxe Neckwear, Oshkosh, Wis.

AGENTS—Best seller; Jem Rubber Repair for tires and tubes; supersedes vulcanization at a saving of over 800 per cent; put it on cold, it vulcanizes itself in two minutes, and is guaranteed to last the life of the tire or tube; sells to every auto owner and accessory dealer. For particulars how to make big money and free sample, address Amazon Rubber Co., Philadelphia, Pa., Dept. 505.

FREE Booklet describes 52 plans for making $20.00 to $100.00 weekly in home or office business of your own. Downs Co., 2123A Myrtle, St. Paul, Minn.

AMAZING new invention duplicates anything typewritten, hand written, drawn or ruled. Sells every office, store and restaurant. Big commission. Duplicopy, 624 Jones, San Francisco, Calif.

$50,000. PICTURE Man Friedman made canvassing. Beginners can make $100.00 weekly with my sales talk. Experienced men make more. Free book "Profits in Portraits" explains. Samples Free. Picture Man Friedman, Dept. 8-J, 541 W. Lake, Chicago.

FREE Sample Outfit. No Deposit. New Plan, making tremendous hit. Fit-to-measure $6.45 Shoes. Experience unnecessary. No competition. Big Money. Quick Repeat Business. Large Income appointing subagents. Satis-Factory Co., Dept. PM-3, 215 Randolph, Chicago.

MAKE $100 Weekly in Spare Time. Sell what the public wants—long distance radio receiving sets. Two sales weekly pays $100 profit. No big investment, no canvassing. Sharpe of Colorado made $955 in one month. Representatives wanted at once. This plan is sweeping the country—write today before your county is gone. Ozarka, 802 Washington Blvd., Chicago.

$60-$200 A WEEK. Genuine Gold Letters for store windows. Easily applied. Free samples. Liberal offer to general agents. Metallic Letter Co., 438-D North Clark, Chicago.

GREAT Seller. "Magic Polishing Cloth." Polishes all metals instantly. No polish needed. Real Moneymaker. Enormous Profit. "Sample Free." Bestever Products, 1947E. Irving Park, Chicago.

SELL Guaranteed Shoes—earn $250 to $500 a month. Exclusive territory, complete sales outfit. We deliver and collect. No capital or previous experience needed. Write today. Style-Plus Shoe Co., 417 New Nelson Bldg., Kansas City, Mo.

SELL Guaranteed Paint—$10 to $20 daily profit. Freight Prepaid—Exclusive territory—sales come easy. Free sales outfit. We deliver and collect. Experience unnecessary. No capital needed. Write today. Universal Paint Co., 272 Baltimore Bldg., Kansas City, Mo.

AGENTS—Be manufacturers. Make and sell your own products. Big profits. Permanent repeat business. Information free. Jos. D. Carney, 5425 Lake Park Ave., Chicago.

NEW camera takes and finishes photos in one minute. Make money selling cameras or taking photos. Exclusive territory. Crown Co., Dept. 951, Norwalk, Conn.

WANTED several hundred men to represent manufacturer taking orders for shirts, raincoats, topcoats, sweaters, overalls. Big commissions daily. Send for free sample outfit. Northern Sales Co., 305 Northern Office Bldg., Chicago.

WE pay $48 a week, furnish auto and expenses to introduce our Soap and Washing Powder. Buss-Beach Company, Dept. A42, Chippewa Falls, Wis.

MEN—70c Profit on $1.00 Sale. New, Different. Automobile Cleaner and Polish. Sells Itself on Demonstration. Your Name on Label. Appoint Agents. Exclusive Rights. C. Lab., 213 Griswold, Detroit, Mich.

SKAT Sales Agents Wanted. All or Part Time for Skat Hand Soap, Metal Polish, etc. Strictly Commission. The Skat Company, Hartford, Conn.

MAKE Money in your Spare Time. Easy to make $1 to $2 an Hour by following our instructions. No Money or Experience Necessary. Write today for particulars. Costs nothing to investigate. American Products Co., 2534 American Bldg., Cincinnati, Ohio.

SENSATION. Big Money Selling New Camera that Takes and Finishes Picture in 2 Minutes. Great Repeaters. Write Quick. Keystone Specialty Company, Dept. B, Altoona, Pa.

AUTOMOBILE Accessory Salesmen secure exclusive territory for practical quick-selling Motor Temperature Indicator, side line. Write for particulars to Dowell Indicator Corporation, 163 East 35th Street, New York.

AGENTS, 250% profit selling latest novelty sign. Storekeepers buy ½ to 2 doz. Free sample. National Cards Co., 124 G W. 18th St., New York.

CAN you sell Colored people? $10 to $25 daily profits. Local and general sales agents now being appointed all over the United States, Central and South America, West Indies, and Africa. Write for particulars today. Perma Chemical Laboratories, 416 Woodward Ave., Detroit, Mich.

BASCO Mending Fluid mends hosiery and all fabrics, sells fast, repeats quickly. Reserve territory now. Basco Products Co., 21 Lincoln St., Boston, Mass.

AGENTS—Success—$1.00 Book—Tells you How. Mitchell, 145 Chestnut, Red Bank, N. J.

Copyrighted material

AGENTS make $15—$20 daily; household and toilet articles; also wonderful combination sets; easy sellers; great repeaters. Write Variety Products, 69 Front Street, New York. Dept. A. G.

BIG money selling Luster Groom. The Perfection Hair Dressing. Everybody wants smooth, shining hair. Send 10 cts. for 50 ct. jar. Write quick. The Duoform Co., LG 1, Attica, N. Y.

AGENTS—I want hustling young men to take charge of my business in their home neighborhoods. $1.25 an hour for spare time. Permanent positions. Dignified work. No experience or capital required. Costs nothing to start—I furnish everything. Answer quick. Harley Co., G-2011 Harley Bldg., Dayton, Ohio.

MEN and women wanted as exclusive representatives, all localities, taking orders for beautiful low priced house, porch and street dresses. I deliver, collect and pay you every Saturday. Carol Lee, 1080 Gateway Station, Kansas City, Mo.

DARN E-Z, the guaranteed mending cement for hosiery, fabrics, auto tops and tires. District and State managers wanted. Protection in exclusive territory. Darn E-Z Laboratories, Dept. 204, Dayton, Ohio.

AGENTS Wanted: "Mistless" Rain Pad for windshields. Practical safety device every motorist needs. Send $1.00 for demonstrating outfit. No Stamps. Specialty Products Co., Dept. PM., Cedar St., Hillside, N. J.

AGENTS—Make $75 to $100 a Week. "Fixit" Rubber Repair seals punctures and blowouts. Sample free. Marquette Rubber Company, 2325BB Wolfram St., Chicago.

AGENTS: Dealers, Successful Salesman Magazine gives "Inside Tips" on Successful Merchandising. Three Months 25c; One Year 50c; Three Years $1.00. 10-M Winthrop, Newton, Mass.

AGENTS—Earn $150 weekly. Sell Battery Radium for storage batteries. Millions prospects. Sensational opportunity. Great repeater. No room to tell story here. Write quick. G. J. Age & Company, Muscatine, Iowa.

WALL and Auto Emblems—all lodges. $10.00 daily easy. Every member buys. Absolutely new. No competition. Big fall-spare time money maker. Write for free sample plan. Crafts, 3314-3312-A Lawrence, Chicago.

MILLIONS want marvelous hand cleaner in tubes; removes dirt, grease, without water; demonstration sells motorist, mechanics, workers. Security Mfg. Co., Dept. 31, Toledo, Ohio.

300% PROFIT selling Michell's Magic Marvel Washing Compound. Men and Women clearing hundreds weekly. Wonderful seller. Big repeater. Nature's mightiest cleanser. Free sample. L. Mitchell, C1308 E. 61st Street, Chicago.

NEW household invention, ends window washing drudgery, eliminates ladders, buckets, sponges; 75% quicker; Keeps hands dry. Low price. Lady Jane Mfg. Co., Dept. M, Toledo, Ohio.

EASY Money! Silvering mirrors, Auto-parts, Tableware, Outfits; Plans Free. Sprinkle, Plater 128, Marion, Ind.

PORTRAITS, photo pillow tops, frames, sheet pictures, medallions, merchants' signs, food products, rubber aprons, guaranteed hose, toilet requisites, luminous crucifixes. Catalog 50 specialties free. 30 days credit. Jas. C. Bailey Co., Desk A-7, Chicago.

GOODYEAR Mfg. Co., 174Z Goodyear Bldg., Kansas City, Mo., is making an offer to send a handsome raincoat free to one person in each locality who will recommend it to friends. Write today.

WONDERFUL invention eliminates needles for phonographs. Preserves records. Abolishes scratching. Day's supply in pocket. $20 daily. Sample on approval if requested. Everyplay, Desk B-7, McClurg Bldg., Chicago.

AGENTS Wanted—for Red Dog Tube Patch. Repairs largest blow-outs or punctures without heat or cement. Startling demonstration sells it. 300% profit. If you can't stand "big money," don't answer. Exclusive territory. Samples Free. Auto Products Company, Marion, Ind.

MORE Agents Needed: Our famous Food Products, Soaps, Beauty Creams, now sold on credit. Get new plan quick. Blair Laboratories, Dept. 54, Lynchburg, Va.

START a business of your own with Yu-Chu Vending Machine. New idea empties machine three times faster than others. Sure-fire money maker. Extraordinary profits. Write Yu-Chu Company, 329a Broad Street, Newark, N. J.

AGENTS—good, steady income. Exceptionally useful household article. The Handycap Company, Newark, N. J.

ADVANTAGEOUSLY Productive chipped glass numbers; particulars free. Beveridge, 160-22 Locust Avenue, Jamaica, N. Y.

THE Marvel 12 in 1 Tool. Nothing like it. Sells fast as ice cream for 50c. Price to agents and dealers, 25c—Service Sales Co., Drawer 1824, Washington, D. C.

SELL articles of unusual merit. Marvelous Convenience, absolute necessities. Real Agents make $75.00 to $125.00 weekly—unlimited demand. Exclusive territory. Master Jewelers, Sheboygan, Wis.

10c PUTS your name on mailing list year. Hundreds latest money makers from manufacturers, wholesalers. Kentucky Agency, Box 164, Covington, Kentucky.

AGENTS, Men or Women. Are you looking for a steady income? Silk City Hosiery will bring it to you. Write us, we will help you get it. Silk City Hosiery Co., Box 300 Hackensack, N. J.

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5893 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

ARE you old at forty? See our advertisement on page 147 of this issue. The Electro Thermal Company, 2137 Main St., Steubenville Ohio.

AMERICAN Woolen Mills Co., Dept. 6041, Chicago, are making a free suit for one agent in each community to introduce their fine tailored to order suits at $18 and up. Write them today for their offer.

WE'LL make a classy suit for well dressed man over 25 who will wear and show to friends and help us introduce. Write for order blanks, etc. Chicago Tailors' Ass'n, Dept. 699, Sta. C, Chicago.

GET posted—Good prices paid for butterflies, insects. See Sinclair display advertisement, page 14.

AGENTS—Uneek Utilities, the best dollar sellers on the market, offer you an opportunity to make a bigger income than any other household item. A two-minute demonstration makes the sale and good profit for you. Don't fail to get the facts on these whirl-wind money makers. E. Reich Co., 224-230 W. Huron St., Chicago.

LONG Handled Paint and Scrub Brushes. New Line. Greatest Time and Back Savers Known. Easy Sellers—Big Profits. Easiwayco, 1302 McCulloh, Baltimore, Md.

AGENTS—(Iriscopic) Violet rays Glare Shields. Best item ever produced. For every Motorist. Emerald Glare Shield Company, Freeport, Pa.

AGENTS—Make $1 to $5 an hour selling the Famous Bamboo Self-filling Fountain Pens. Write for offer. Agent's sample 65c. Bennett Sales Co., Aurelle, Ark.

AGENTS coining money selling Automatic Mucilage Pencils. Greatest utility known. Big demand everywhere. Write quick. Regal Co., 4154 Hyde Park, Kansas City, Mo.

BIG money and fast sales; every owner buys gold initials for his auto. You charge $1.50, make $1.44. Ten orders daily easy. Samples and information free. World Monogram, Dept. 16, Newark, N. J.

BUILD splendid business making chipped glass number and name plates, signs, medallions. Write for particulars. Simplex Utility Co., 1133 Broadway, New York.

$1.00 HOUR paid appointing local agents. Household necessity. No experience necessary. Zippo, 3583 East 116, Cleveland, Ohio.

AGENTS—Just Out! New Improved "Perfect" Knife, Scissor Sharpener! Retails $1.00. Guaranteed lifetime. Easy fast seller. Big profits. Exclusive territory. Write today. Conaway Co., Dept. O75, Champaign, Ill.

RAZORITE—Stropless Razor blade sharpener. Demonstrator 25c. Claus, 1864 Harman Street, Brooklyn, N. Y.

AGENTS—For sample and particulars on selling something new—big profit—send 10 cents to Charles Thomsen, 1076 Lincoln Place, Brooklyn, N. Y.

ORIENTAL perfumes selling bigger and better. Good repeaters. 100% profit, as we pay all expenses. Opening for live agents who sell highest grade articles only. Romola Parfumerie, Inc., Woodlawn, 10, Chicago.

NO Boiling, No Freezing. Winter or Summer. Ten Million Ford owner prospects. Agents making big money distributing our products. Airlock Products, Box 503A, Willow Street, Long Beach, Calif.

AGENTS: Sign letters for windows. Scripts and fourteen other styles. Prices right. World Signs, M-166 W. Washington, Chicago.

AGENTS—No experience; Making $100 week. Gold Leaf Letters and Script. Consolidated Company, 636 S. Dearborn, Chicago.

RADIO agents wanted by large manufacturer. 61-A Gautier Ave., Jersey City, N. J.

50 "WINNERS" for Agents and Mail Dealers. K. Rothe, 3949 Metropolitan, Chicago.

"COPYRIGHT 1925" by Surety Service, 551 Harvard St., Rochester, N. Y. $1 Brings Complete Mail Order Plans.

EVERYBODY uses Extracts. Sell Duo Double Strength Extracts. Complete line of household necessities. Big repeaters. Write today. Duo Co., Dept. E1, Attica, N. Y.

MEN Wanted—To earn $5 to $100 per week introducing a fast selling auto accessory. $2.00 profit on every $4.00 sale. Will send a sample at our risk. Write Stransky Co., Dept. J15, Pukwana, S. Dak.

McDONALD Silver Polish sells fast. Large 1-ounce package and terms 10c silver. Daniel McDonald, 18 Agawam St., Lowell, Mass.

SOMETHING new—Presto Rubber Repair for tires, tubes; all rubber goods put on cold, no heat, acid or tools; vulcanizes itself in few minutes. Sells to auto owners and dealers, sample free. Pioneer Products Co., Dep't A, Roebling, N. J.

HERE it is! Skeeter-Skat, biggest summer seller. Enormous demand. Big profit. Sure winner. Write quick. Quality Products, 2712-A Elliott Ave., Minneapolis, Minn.

AT Last A Lifetime Job. Our agents making $50.00 to $150.00 a week selling our "Factory-to-Family" House and Street dresses. No Samples to carry. We deliver, collect and you get your commission at once. Peggy Ann Dress Co., Dept. 38, 414 E. 8th St., Cincinnati, Ohio.

$100.00 WEEKLY earnings; every agent write for full particulars on How To Be a Successful Agent. Box 1382, Detroit, Mich.

JIFFIE Stain Remover. 19c profit on 25c sale. Sample 12c. Bigelow, Box 673, St. Louis.

MAKE-Sell Your Own Goods—Formulas, Processes, Trade-Secrets. Modern master methods. Catalog free. B. Thaxly Co., Washington, D. C.

NEW Marvelous Discovery "Bestever Powdered Hand Soap" Works like Magic. Removes grease, grime, paint, stains without harm to hands. Sells like wildfire to Stores, Factories, Garages. Quick Repeater. "Sample Free." Write immediately. Bestever Products Co., 1945 E. Irving Park, Chicago.

AGENTS—magic movie maker will make money for you. Wonderful new invention. Samples and particulars for 25 cts. Hansen Bros., 259 North Second St., San Jose, Calif.

ARTICLE costs 5c, sells quickly for dollar. Particulars free. Baggs, 3239 Archer Ave., Chicago, Ill.

MARVELOUS Radio Gas Lighter sells instantly to every user of gas. Good for 10,000 lights. Retails only 25c; cost $10 a gross. Your profit 18c on each sale, $26 on gross. Send $1.00 for sample dozen with self-selling plans. M. I. Masterlite Co., 110 East 23rd St., New York.

CHANGEABLE letter show window signs. Every merchant a prospect. Large profits. Send for free sample offer. Maze Manufacturing Co., 7653 Osceola Ave., Chicago.

SHOW Us the Housekeeper who likes to clean stair corners; Ideal Dust Shields keep corners clean; match woodwork; quick cash sales; big profits; sample and agents proposition free; Ideal Stairway Equipment Co., Canton, Ohio.

AGENTS—big profits gold sign letters, easily applied. Sample free. Liberal offer to General Agents. Interstate Sign, 2953 Armitage Ave., Chicago.

AGENTS San-I-Germ will make $20 a day for you; sell at 30c; repeater; big profits. San-I-Germ, 535B, Port Huron, Mich.

$5 STARTED me earning $200 weekly Selling By Mail. Anyone can do same. Everything furnished. Get my offer today. Peerless Service, 447 Waterville, Me.

Copyrighted material

RUPTURE Sufferers. Amazing new kind of truss with dot lock makes old-fashioned straps, cushions, heavy cumbersome devices unnecessary. Read announcement on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

AGENTS—new invention. $15.00 daily easy. "IAMA," knife and scissor sharpener is absolutely guaranteed; sells on sight. K. F. Novelty Co., Medinah Bldg., Chicago.

10,000,000 FORDS need "Greater Grip" Fan Belts. Big Profit selling Dealers. Write quick. Teuscher Belting Co., St. Louis.

ORANGEADE, in powder—just add cold water—most delicious drink you ever tasted. Fine for home, parties, picnics, dances, etc. Start in this business—big money easily made. Send dime for ten glass package, postpaid. 7 kinds, Cherry, Grape, Lemon, Strawberry, etc., for 70 glasses only 50c, postpaid. Morrissey Company, 4417-25 Madison St., Chicago.

YOUR photo painted on Ivorette Novelties. Black Studio, D-40, Los Angeles.

AGENTS. New Selling Plan! $1.25 premium free to every customer on a $2.00 sale, consisting of 8-oz. Vanilla, 6-oz. Shampoo, 4-oz. Lemon Lotion. A big hit everywhere. Complete details free. Territory going fast. Write today. The C. I. Togstad Company, Dept. 6, 29 South Clinton St., Chicago, Ill.

SELL Books by Mail! Big Profits! Particulars Free! Elfco, 523 S. Dearborn, Chicago.

EASY Money Applying Gold Initials, Monograms on automobiles. Anyone can do it. Simply transferred from paper; takes 5 minutes. Make $1.50, cost 5c. Samples free. "Raleo," 325 Harrison, Boston, Mass.

AGENTS, $20 daily easy selling household necessity every woman wants. New invention reduces price. Big profit. Fagley & Halpen, 37 No. 2nd St., Dept. 5, Philadelphia, Pa.

SELL Ford Owners most efficient timer on market. Agents everywhere coining money—$50 to $75 weekly. Haines sold forty first week. Wonderful side line. Write Dept. 30, Auto Sun Products Co., 855 West 6th St., Cincinnati, Ohio.

CALIFORNIA Roseheads selling like hot cakes. Agents coining money; new stuff. Big profits. Catalog free. Mission Factory PM, 519 No. Halsted, Chicago, Ill.

AGENTS—$60 to $200 weekly putting up our Burnished Genuine Gold window letters, scripts. Experience unnecessary. Free samples. Premier Letter Co., 121 N. Francisco, Chicago.

DUSTLESS Sponge Cloth. New Invention. (1) Rub—Dusts, Cleans and Polishes Automobiles, Furniture, Pianos. Retails (50c)—Costs (16c). "Sample Free." NuLife Sponge, Hartford, Conn.

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 314 A. B. E. Building, Grand Rapids, Mich.

AGENTS Wanted to represent our guaranteed 100,000 mile puncture proof auto tire. Tire Demonstrator free. Write for particulars. Everlasting Tire Co., 6225 S. Halsted St., Chicago.

AGENTS. Monogram Automobiles. 15 Million prospects. $1.40 profit every $1.50 sale. Wilbar made $29.50 first day. Free samples. Worrester Monogram Co., M45, Worrester, Mass.

AGENTS: Gingham House Dresses $8.50 dozen. Retails $1.50. Sample $1. Write for free 200 sure seller catalog. Economy Sales Co., Dept. 304, Boston, Mass.

AGENTS $1. Retail $3. Your Profit $2. Wonderful, pocket Adding Machine with Magic Writing Pad. Particulars Free. Typewriter Supply, 905 Hersch Bldg., Pittsburgh, Pa.

AGENTS. 100% profit selling Hold-tite Ironing Board covers the year 'round in every home. Ideal, Dept. M, 281 Fulton Street, Brooklyn, N. Y.

NEW Marvelous Self-lighting Gas lighter. Sells on demonstration. Sample 25c. Gross $10. Rapid Mfg. Co., 799a Broadway, New York.

IF you want good live agents—fellows who can get the business—ask me how others are doing it. I'll gladly render the necessary assistance. Geo. F. Baker, Mgr. Classified Advertising, Popular Mechanics Magazine, Chicago.

$300 FIRST Two Weeks—made by Weigand, Johnstown, Pa., selling "Slide-O-Graf Jr." Novel, effective—sidewalk advertisement projector. Sells fast, big non-competitive field. $14 Profit every sale. Standard Slide Corp., 207 W. 48th St., New York.

AGENTS—Men and Women. 35 Million women are anxiously waiting to buy the 3-In-1 Hot Water Bottle—Icebag—Fountain Syringe combination. Commissions daily. No delivering. Write for startling money making plan. Lobl Manufacturing Corporation, Middleboro, Mass.

SELF - THREADING Needles, Needle Books, Machine needles, find sales in every home. Fine side lines, easily carried, big profits, sample and catalogues free. Prentice Lee, 145 East 23rd St., New York.

GENUINE Gold Leaf Letters anyone can put on Store windows. Guaranteed to never tarnish. Large Profits. Enormous Demand. Free Samples. Write today. Metallic Letter Co., 438-A North Clark, Chicago.

NEW Marvelous Pocket Cigar Lighter. No friction. Sample 25c. Rapid Mfg. Co., 799b Broadway, New York.

WANT Information on thousands fast-selling articles? Write Institute, 15 Moore, New York.

AGENTS, Crew Managers, make big money. Postal brings particulars. Over 200% profit. Guaranteed line. County Representatives wanted. Midwest Drug Company, 191 E. Nachren St., Columbus, Ohio.

AGENTS, Distributors, Crew Men average $60-$100 with Harker Products; 10c brings sample of leader; money back if you wish; free folder shows how to start small and grow big. Act; Send today; big surprise awaits you. Harker Co, Bridgeport, Conn.

AGENTS—N-R-G Laundry Tablets, the old reliable money-maker for live agents. Millions sold—200% profit—sales waiting for you. Clothes washed spotlessly clean in 10 minutes without rubbing. Free samples. N-R-G Company, B 732 N. Franklin, Chicago.

AGENTS—Write for Free Samples. Sell Madison "Better-Made" Shirts for large Manufacturer direct to wearer. No capital or experience required. Many earn $100 weekly and bonus. Madison Mfgrs., 511 Broadway, New York.

NEW Specialty. Costs 16c, Sells for 50c. Real $1 value. 30 other wonderful sellers. New inventions, all necessities. Agent's Outfit Free. Write Quick. General Products Company, Dept. 7, Newark, N. J.

AGENTS—It's easy to sell our patent fibre house brooms. Halston made $114 one week, 100% profit. Great repeater. Protected territory. Write quick. Wearever Broom Company, Box A, Jonesville, Mich.

AGENTS, both sexes, we manufacture and control new household article. Fast seller. Big profits. Exclusive territory. Write Now. Connelly, 123 Liberty St., New York.

POLMET—The Wonderful Polishing Cloth that cleans all metals without liquid, paste or powder. Approved by "Good Housekeeping" and "Modern Priscilla"—sells fast at 25c. Sample free. Gale & Co., Inc., 15 Edinboro St., Boston.

AGENTS make $100 Week placing Advertising Cigar Lighters with glass front. Every dealer wants one. Average profit $25 each. Write for free plan. Drake Mfg. Co., Dept. M, Milwaukee, Wis.

$20 PROFIT daily selling needlebooks; costs 3c-5c each; sells 25c, value 50c; Three samples 25c. Catalogue Free. Needlebook Specialty Co., 661 Broadway, New York.

AGENTS, sell guaranteed shirts and hosiery. 60 styles. Large advance commissions. Make big money without investing a nickel. Write A. Helix Hosiery, 596 Broadway, New York.

ROBT. H. INGERSOLL of $1 Watch fame wants good men to sell his Dollar Stropping outfit, an ingenious invention for sharpening all makes of safety razor blades. Great economic value. Meeting with nation-wide approval. Easy to sell. Big repeat business. Agents having remarkable success. Full particulars. Robt. H. Ingersoll, 476-D Broadway, New York City.

300% PROFIT—Quick, easy seller, Klean-Rite, New Clothes Washing Compound. No rubbing. Women simply amazed. Free premiums makes sales easy. Fast repeater. Distributing samples free. Everybody grabbing for territory. Write quick. Bestever Products Co., 19478, Irving Park, Chicago.

AGENTS—Make a dollar an hour. Sell Mendets, a patent patch for instantly mending leaks in all utensils. Sample package free. Collette Mfg. Co., Dept. 404, Amsterdam, N. Y.

MOST Wonderful Seller. 98c profit every dollar. No stock to carry. License unnecessary. Sample free. Mission Factory PM. 519 No. Halsted, Chicago, Ill.

EVERYBODY Needs and Buys the "Business Guide." Wells cleared $1,150 in 25 days. Send for sample. It's Free. Nichols Co., Dept. 4B, Naperville, Ill.

AUTO owner tire agent wanted each locality to use and take orders for handmade Mellinger fabric and cord tires; guarantee bond 8,000 and 12,000 miles (no seconds); shipped prepaid on approval; get your tires free; no capital or experience required; make $100 to $300 weekly. Write for wholesale prices and sample kit. Address, Mellinger Tire Co., Dept. 300, Kansas City, Mo. or Dept. 300, Philadelphia, Pa.

MAKE $25 to $50 Week, representing Clow's Famous Philadelphia Hosiery, direct from mill—for men, women, children. Every pair guaranteed. Prices that win. Free book "How to Start" tells the story. George Clows Company, Desk 31, Philadelphia, Pa.

GREATEST Sensation—11-piece toilet goods assortment selling like blazes at $2.00 with $1.25 Dressmaker's Shears Free to each customer. Winner for 15 years. Davis Products Co., Dept. 56, Chicago.

AGENTS: Our gold-eyed needle cases are wonderful sellers; immense profits; $50 to $300 weekly; proof and particulars free; sample outfit 15c. Factory prices. Paty Needle Co., 231 Davis Square, Somerville, Mass.

200% PROFIT selling Gem kettle bottoms. "The article with a dozen uses." Housekeepers buy on sight. Columbia Specialty Co., Box 73D, East Liverpool, Ohio.

MILLIONS lost by forgery. Wonderful new $5.00 Check Writer perforates, inks in three colors. Equals work of $60.00 machine. Five-year guarantee. Full or side line. Protected territory. Write quick for details and free trial. Safety Devices Corporation, Dept. P, Grand Rapids, Mich.

AGENTS—Good salary and commission selling "Ratskyll," new rat and mouse exterminator; ready for use; no bait required; non-poisonous; rodents die outside premises; no odor. Empire Specialties Co., 1549 N. Wells, Dept. 301, Chicago, Ill.

AT Last—World's Greatest Adding Machine. Almost human. Retails $15; work equals $300 machine. $500 monthly easily made, demonstrating to stores, offices, garages, factories. Simple, easy; adds, subtracts, multiplies, divides automatically. Speedy, accurate, durable, handsome. Five year guarantee. Tremendous demand, amazing profits. Liberal trial offer. Protected territory. Write quick. Lightning Calculator Corp., Dept. P, Grand Rapids, Mich.

$100.00 WEEKLY and over. Selling our newly patented auto specialties. Free sample and particulars. Jackson Mfg. Co., 1331 16th St., Denver, Colo.

WANT distributing agent for Hanslick, powdered handsoap; removes anything from the hands without injury to skin; everybody a customer; great opportunity for hustler to get in business; sample free. Solar Products Co., G 124 West Lake, Chicago.

WONDERFUL! Startling! Amazing! Our Ex-Cel Luminous Crucifix and Magical (Luminous) Necklace shine brilliantly in the dark. Sell on first demonstration. Big profits to you. Write for further particulars, or better still, send for sample and territory protection immediately. Crucifix $1.50, Necklace $1.00, postpaid. W. G. Hannan Co., Dept. B, 57 E. 18th St., Chicago.

YOU can be your own boss with our Key-Check outfit. Good for $5 a day stamping names on pocket key checks, fobs, etc. Sample check with your name and address, 20 cents. Pease Die Works, Dept M, Winchester, N. H.

INSTANT Weld. Repairs largest punctures without cement or heat. Lenn's profit one day, $56. Write quick. Free sample; territory going fast. Tourists' Pride Mfg. Co., Desk T, Minneapolis, Minn.

EARN $10 daily silvering mirrors, plating and refinishing metalware, autos, chandeliers, bedsteads, headlights. Outfits furnished. E. Decie Laboratories, 1133 Broadway, New York.

AGENTS—Clever Invention! Inkspoon makes every pen a fountain pen. Fast office seller; big profit, demand increasing everywhere. Exclusive territory offered. Sample free. H. Marut Company, Tribune Bldg., New York, N. Y.

AGENTS—Stamping names on Pocket Key Protectors; sample Check with your name and address, 25c. Stamping Outfits, Emblem Checks, Check Fobs, Name Plates. Hart Mfg. Co., Desk 2, 303 Degraw St., Brooklyn, N. Y.

AGENTS: Big Money Monogramming by Transfer Method. Catalog Showing Over 50 Styles and Particulars Free. Motorists' Accessories Co., Mansfield, Ohio.

WE Start You Without a Dollar. Soaps, Extracts, Perfumes, Toilet Goods. Experience unnecessary. Carnation Co., Dept. 201, St. Louis.

Copyrighted material

MAN in each town to plate auto parts, reflectors, bathroom fixtures, refinish beds, mirrors, chandeliers; by new method. No capital or experience required. Simple plan of manufacturing at home starts you in big money-making business. Outfit furnished. Free particulars and proofs. Gun Metal Co., Ave. H, Decatur, Ill.

AGENTS: Big Profits. Best and cheapest window letters made. Easily applied. Dime brings fire samples. Particulars free. Stalbsite Co., 1115 Second Ave., New York.

TO secure agents or salesmen or for selling (want) ads in largest newspapers and magazines. Price list No. 30 sent free. Ankrum Advertising Agency, 20 W. Jackson Blvd., Chicago, Ill. The largest classified advertising agency in the U. S.

WASH Clothes the new way. Use the Torrent Automatic Washer. You will be delighted. Special offer to one in each locality. Storm Royalty Co., 3610 Enright Ave., St. Louis, Mo.

A BUSINESS of Your Own—Make and Sell Chipped Glass Name and Number Plates, Checkerboards, Signs. Large Booklet Free. E. Palmer, 512, Wooster, Ohio.

TURN your spare time into dollars selling Polmet Polishing Cloth that cleans all metals without liquid, paste or powder. Retails 25c. Our agents say it sells like "hot-cakes." Prove it yourself with free sample sent on request. F. C. Gale Co., 122 Edinboro St., Boston.

GET Our Free Sample Case—Toilet articles, perfumes and specialties. Wonderfully profitable. La Derma Co., Dept. A, St. Louis, Mo.

LIVE Agents Make $10 Day selling Eureka Strainer and Splash Preventer for every water faucet. Takes on sight. Widely advertised and known. Get details today. A. B. Seed Filter & Mfg. Company, 73 Franklin, New York.

AGENTS: 500% profit. "Happy Home Maker Shampoo" builds your own big business. Martin of Indiana made $75.00 in one day. Missouri man made $750.00 one month. Exclusive territory. Geo. A. Schmidt & Co., 236 W. North Ave., Chicago.

EASY, pleasant work for Mechanics, Shop Men, Clerks, during spare hours; will add many dollars to their salaries. Also want persons who can give full time. Big wages assured. Novelty Cutlery Co., 67 Bar St., Canton, Ohio.

SELL Shirts and Overalls direct to wearer. Big profits. Work full or spare time. No experience required. Big variety dress shirts with splendid line Union-made work and flannel shirts, overalls, coveralls and khaki pants. Write today for free selling outfit. The Nimrod Shirt Co., Dept. S, 4712 N. Kedzie Ave., Chicago.

AGENTS make 500% profit handling auto monograms, window letters, transfers, novelty signs. Catalog free. Hinton Co., 1153 N. Wells St., Chicago.

CAN you sell to colored people? Write, Eston Co., Dept. 101, 2300 Second Ave., Birmingham, Ala.

EARN big money fast applying gold initials to autos. Every owner buys—$1.35 profit on $1.50 sale—particulars and samples free. Write quick. Lithogram Co., Dept. 17, East Orange, N. J.

MAIL-ORDER Houses and Distributors: We pack French made beauty creams, face powders, perfumes, toilet preparations with your label. Chemist, 944A North Clark, Chicago.

SELL the Livest, Quickest Selling Specialties Ever Known—Famous "Hahwax" self-lighting pocket Cigar Lighters and Gas Lighters. Low Prices. Easily Demonstrated. Sell to Dealers. Employ Sub Agents. Exclusive Territory. Make over 100% Profit. P. Bernhardt, 148 Chambers Street, New York.

AGENTS—Send for free sample "Fretnot"—washday wonder. You can clear at least $20 to $100 weekly, according to spare or whole time. You don't have to talk; if she doesn't buy at sight, leave sample; she will be looking for you long before you are able to make the rounds again. Samples furnished free. Premiums for your customers. Exclusive territory. Credit given. Empire Specialties Co., 1549 N. Wells, Dept. 101, Chicago.

BIG Money and Fast Sales. Every owner buys Gold Initials for his auto. You charge $1.50; make $1.35. Ten orders a day easy. Write for particulars and free samples. American Monogram Co., Dept. 40, East Orange, N. J.

BIG Money Selling Gold Initials. Quick Sales. Every Car Owner Buys. You Charge $1.50—Make $1.44 Every Sale. Your Profit $20 Daily. No License. No Experience. Samples Free." NuLife Monogram Company, Hartford, Conn.

TAILORING Salesmen: Our guaranteed $21.50 and $31.50 all wool tailored to order suits are $10 to $20 cheaper than store prices. Commission in advance. Protected territory. Beautiful assortment 6x9 swatches free. Manager, Dept. 1060, 843 Adams, Chicago.

150% PROFIT selling our mysterious stain remover for clothing, leather, etc. Fulgentine Co., 801 Farragut, Bay City, Mich.

"HOW to Sell Patents" free. Patent News-O, Washington, D. C.

AGENTS—Millions of women will buy the New Sharp-Easy. Write today for particulars about the big profits made selling this quick moneymaker. Premier Mfg. Company, Dept. 813, Detroit, Mich.

SALESMEN—Make $300 to $500 monthly selling Morey Rim Tool to trade and car owners. Quick, easy sales. Best season just starting. Write for special offer. Morey Rim Tool Co., Sect. P, Blissfield, Mich.

LIGHTNING Battery Charging Fluid! Make it yourself! See my ad under "Automobile Supplies." Murphy, Chemist.

HIGH GRADE SALESMEN WANTED

GET into the tailoring business. It's one of the most profitable of all lines in the selling field—particularly when you are handling a good line of goods at a price that meets and beats competition. Our line does it. It offers an exceedingly fine line of men's tailored-to-measure clothes at a very attractive price, with a liberal profit to the salesman and a liberal cash bonus besides for good work. Back of the line is a house of unquestioned reputation and responsibility, giving unequalled service and real co-operation to the salesman. We can use a few more good men this season, but they must be good. This does not necessarily mean that they must be experienced, but they must be honest, ambitious and willing to work hard to make the most of the opportunity we'll give them. If you know yourself to be such a man we'll be glad to hear from you and we know you'll be glad to hear from us when you get our reply, which you will promptly. When you write address Dept. 680, Goodwear Chicago, Inc., West Adams Street at Peoria, Chicago.

QUICK Selling Side Line Sells the Year around. New ideas. Pays big profit. Live wire salesmen calling on retail trade wanted to handle unusual line oil processed Novelties and Framed Oil Paintings. Easy to sell. Liberal commission. Requires very little time. Can be handled in connection with nearly any other line. Don't pass up this opportunity for extra earnings. Write stating present connections and experience. The New Process Corporation, High St., Fort Wayne, Ind.

AGENTS—KoverKwicK is Back—Wanted, Salesmen to sell KoverKwicK Combination Coat-Overalls. Sells at sight. Every man a customer. Liberal commissions. We deliver and collect. You keep deposit. Write for territory. KoverKwicK Mfg. Corp., House Bldg., Pittsburgh, Pa.

AUTO Shop Tool Salesmen Wanted; Commission. A. D. Alexander, Fredericksburg, Va.

SALESMEN and Agents—The Fairmont Anti-Glare Shield is the greatest selling automobile specialty ever put on the market. The driver can look into an approaching glaring headlight and clearly see either side of the road. Retails at $1.00. Sells to Drug, Hardware, Automobile Accessory, Cigar, Stationery and most any line of business. Also a wonderful thing for agents to sell direct to automobile owners. You can make big profits handling same. Write for full particulars to Department E, Fairmont Opt. Mfg. Co., 35 Kneeland St., Boston, Mass.

SALESMEN wanted to sell a glued label to stick in the windshields of automobiles. It is the drawing of a girl in a dancing pose. Samples and instructions 25 cents. R. Chalifoux, 959 Dorion St., Montreal, P. Q., Canada.

SALESMEN experienced in disinfectant, sheep dip and sanitary specialties trade; big profit proposition for right man. Chemical Supply Co., 2450 Canal Road, Cleveland, O.

SALESBOARD Salesmen Wanted. Make $75.00 daily selling our Flashy Salesboard Assortments. One sale brings in $41.50. Call on Dealers everywhere. Wonderful opportunity. Big Commissions. Write today for Catalogue and Jobber's Prices. Central Mfg. Co. Dept G, 2627 W. Walton St., Chicago.

"COPYRIGHT 1923" by Surety Service, 551 Harrard St., Rochester, N. Y. $1 Brings Complete Mail Order Plans.

DISTRIBUTORS: Sell absolutely needed $1.00 and $2.50 Ford Specialties, to owners and all accessory dealers. 75% buy on sight. 150% profit. We finance your dealer accounts. Wonderful repeater. Easy-Fill Cap Company, 2303-C Ogden Ave., Chicago.

GARAGE Tool Salesman. New Valve Spring Tools, no competition, easy, quick sales run to volume. Big commissions paid weekly. Clark-Feather Mfg. Co., No. 427 Charles Bldg., Denver, Colo.

SELL Vari-Tint Airbrushed Display Cards. Big assortment of snappy subjects. Natural colors. Komik Advertising Co., Cambridge, Ohio.

NO Competition—Big Profits—for salesmen selling reliable established line of unusual sanitary products. Zef-ir Fly Incense—a big sensation. Nip-and-Tuck—absolutely kills roaches. Silk Floss Shampoo—the biggest value on the market for 50c retail. Many other unusual quick selling items. Write for catalog of complete line, prices and salesman's proposition. Want side line men calling on retail trade, house-to-house salesmen, specialty sales organizations, etc. Write at once before your territory is taken. Silk Floss Shampoo Co., Huntington, Ind.

VENDING machine salesmen, sensational new plan sells newly invented combination gum machines by hundreds; six machines in one; new slug-proof device; $50 to $250 weekly. Hurd, Wholesale Dept., New York Life Building, Kansas City, Mo.

SALESMEN — Sell Four Square Suits, $12.50; guaranteed two years. Five patterns. Profit in advance $3 to $5.50. Coat, vest, pants, riding pants, slip-ons, caps. Women's knickers, Jiffy Snap-ons. One-day delivery. Stone-Field, DA 2556 Wabash, Chicago.

EASY to Sell Groceries, Paints, Lubricating Oils, from samples to consumers in towns and country. Prices meet all competition. No capital or experience necessary. Profitable, steady work. Commission advanced. Satisfaction guaranteed; 53 years in business. Write Loverin & Browne Co., Wholesale Grocers, 1775 So. State, Chicago, Ill.

$60-$200 A WEEK. Genuine Gold Letters for store windows. Easily applied. Free samples. Liberal offer to general agents. Metallic Letter Co., 438-B North Clark, Chicago.

$14 COMMISSION on smallest order. Our salesmen make $5,000 per year and over selling advertising pocket knives. Easy to sell. High-grade regular and sideline men wanted. Whitsett Co., Dept. B, 212 N. Sheldon, Chicago.

$2,000 TO $10,000 per year selling salesboards to merchants on liberal credit plan. Easy to sell from beautifully illustrated catalog. Big repeats. Quick commissions. Write now. Kay Dee Co., Dept. B, 212 N. Sheldon, Chicago.

SALESMEN—Agents—Big Cash Profits Paid Daily for demonstrating and selling Save-M Fire Extinguishers to auto and truck owners, garages, filling stations, stores, homes and farms. A real liquid fire extinguisher—only $3.75. Sells on sight. Big Commissions to agents working all time or spare time—no capital or experience required—you sell them—we deliver and collect. Write for territory, full particulars and actual photographs of fires put out by Save-M fire extinguishers. Tom Bateman, Salesmanager, 701 Save-M Bldg., Cincinnati, Ohio.

SALESMEN, A Salesboard that takes the place of a slot machine. Something new. Write for particulars of this interesting and profitable business of operating and selling Salesboards. Square Hole Board Co., 120 Scheerer Ave., Newark, N. J.

SELL Paint—Earn $50.00 to $100.00 per week. Direct from factory to user. No experience necessary—we deliver and collect—you receive your pay weekly. Send Post Card today for full particulars. Mack Paint Company, 30 E. 6th St., Kansas City, Mo.

IF you can sell, don't waste time reading these advertisements. Sell Collection Service. Four sales daily net you $32.00 profit. $2.00 brings sample and facts. Waters Association, Swank Bldg., Johnstown, Pa.

REPRESENTATIVES Wanted—Commissions 30%. Merchandise having exclusive patented features. Write for liberal proposition. National Manufacturers' Service, 16 West 22nd St., New York City.

SALESMEN: Something new, sideline or mainline. Wholesale, Retail, Hardware Accessory, Tire Shops, Gas Stations, Notion, Mercantile. Value seen instantly. Retails 25c. Worthwhile comm. Burgan-Byerson Co., 216 E. Ontario, Chicago.

Copyrighted material

COULD You Sell a $40.00 Suit for $23.50? You don't have to have experience in selling clothes or any other selling experience, for that matter. We'll give you a powerful, impressive selling outfit and careful and complete instructions. We'll train you in a way that will assure you earnings of $75.00 to $150.00 a week or more right from the start, provided you're honest, thoroughly dependable and willing to work hard. We're an old established house of unquestioned reliability. We're particular about the men we take. If you too are particular about the house you work for, let us hear from you and tell us all about yourself. Address Dept. 432, William C. Hartlett, Inc., 850 West Adams Street, Chicago.

SALESMEN — Every automobile owner needs this new Attachment. Dealers buy on sight. Splendid side line. Write today. Raff, 31 William St., Newark, N. J.

SELL key checks, Sample with name, address stamped on, 25c; good profit. Box 2003, Bridgeport, Conn.

DISTRIBUTE: New entirely different automobile fuel saver. Easy Quick Sales. Tremendous profits, write today! Schrieber's Auto Service, Nashville, Ill.

SELL advertising pencils. Big profits. Lauber Pencil Works, 740 Hodapp, Dayton, Ohio.

STARTLING New Invention for the Lawn, medicine bottle for the lawn and garden. Turns water to medicine for the lawn yet uses only water. Attach it to a hose, turn on the water and watch the crowds gather to see what's going on, makes water roll up like a smoke bank. Gets 'em all. Takes the place of sprinkler, everybody buys. Sells for only $2.00. Agents make half and more. Selling by the thousands. Nothing like it. Write for our proposition. Lawn Inventions Company, La Crosse, Wis.

REPRESENTATIVE wanted for this territory. Wonderful value Men's, Women's, Children's Shoes direct, saving Wearer over 40%. 72 Styles. Experience unnecessary. Permanent, steadily increasing income. Write today. Tanners Shoe Mfg. Co., 6-410 C St., Boston.

SALESMAN Wanted—Side or full time. Fast sellers, wonderful repeaters, enormous profits; merchant pays $2.00, retail for $3.50. Box 32, Mansfield, Ohio.

SALESMAN: If You Think in Terms of $6,000 the First Year, Write Us. Strong line for retail stores. Nationally advertised. Established concern has unusual opportunity. Liberal weekly advance to producer. Continental Co., 1922 Euclid Avenue, Cleveland, Ohio. Dept. 200.

SALESMEN—Soldering Irons and Cigarlighters for automobiles and radio. Samples 75c each. Kelly Specialty Co., 4619 Harrison St., Chicago.

BEST Seller. Jess Rubber Repair for tires and tubes; supersedes vulcanization at saving of over 800%; put in on cold, vulcanizes itself in two minutes; guaranteed to last life of tire or tube; sells to every auto owner and accessory dealer. Get particulars how to make big money and free sample. Amazon Rubber Co., Philadelphia, Pa. Dept. 510.

SALESMEN — Become Independent—Own Your business; experience unnecessary selling our $7,500 accidental death, $50.00 accident, $25.00 sick weekly benefit. $12.50 yearly. Other amounts proportionate. Guaranteed steady income from renewals. $250,000 deposited Insurance Department. Universal Policy, Dept. A, Newark, N. J.

NEWEST invention! Automatically takes slack and kinks from cords on telephones, electric irons, etc. $25 daily. Sample on approval if requested. Neverknot, Dept. 71, McClurg Bldg., Chicago.

TAILORING Salesmen: Our guaranteed $21.50 and $31.50 all wool tailored to order suits are $10 to $20 cheaper than store prices. Commission in advance. Protected territory. Beautiful assortment 6 x 9 swatches free. Manager, Dept. 1059, 843 Adams, Chicago.

$15.00 DAILY Easy. Sensation of 1925. It's new, just out. "Fixit" Rubber Repair for Tires and Tubes. Fastest seller, and biggest money maker in America. Act quick. Sample free. Marquette Rubber Co., 2323A Wolfram St., Chicago.

TAKE orders for shoes direct from manufacturer to wearer. Experience unnecessary. Full or part time. Mason Shoe Mfg. Co., 12th Ave., Chippewa Falls, Wis.

SALESMEN to sell complete line of Advertising Thermometers; liberal commission. The Ohio Thermometer Company, 521 East Pleasant Street, Springfield, Ohio.

CALIFORNIA Rosebeads selling like hot cakes. Agents coining money. Absolutely new. Big profits. Catalog free. Mission Factory SP, 519 No. Halsted, Chicago, Ill.

WERE You Ever Offered a Grocery Store? Our proposition is better. You can handle flour, canned goods, dried fruit, coffee and entire line of groceries as well as radio sets, paints, roofing and automobile oils and tires with no rent to pay; no money invested, take large orders from samples. Goods are guaranteed and proven quality. Selling experience not necessary. Steady, profitable work for "workers." Address Hitchcock-Hill Co., Dept. 226, Chicago, Ill. Reference: Any bank or Express company.

TAILORING Salesman $100-$150 week selling Union hand-tailored made-to-measure suits and overcoats $23.50-$29.50. Liberal commissions advanced. Wood & Co., 651 So. Wells, Chicago.

$50 DAILY Selling Salesboards—Make up to $33 on single sale, selling largest, lowest priced line; no samples to carry; write for 3-color catalogue and full particulars. Lincoln Sales Co., Dept. E, 212 N. Sheldon, Chicago.

TRAVELING Salesmen calling on retail stores wanted by large manufacturer to sell unique line of business-boosting articles. Year round, fast selling, main or side line. If not earning $150 weekly, address Elsaser Works, 222 Charles St., Bonneville, N. Y.

WANTED—Tailoring Salesmen, make $60 to $125 per week. Biggest merchants in many towns have started with our line. We are the largest made-to-measure tailoring house in the country, furnishing elaborate sample equipments, including 500 all-wool fabrics. You make your own profits from $8.00 to $15.00 on each order. Guaranteed absolute satisfaction, perfect fit, best workmanship, or no sale. Write for line and all accessories to be sent free. Tell us all about yourself. Address N. O. Perry, Sales Manager, Box 483, Chicago, Ill.

SALESMEN Can make $5.00 a day selling our Calendars, Pencils, Signs, Advertising Novelties, Yardsticks, Whistles, etc. Liberal terms. Sells entire year. Fine side line. Local and traveling agents. Model Calendar Co., Dept. 226, South Bend, Ind.

FOUR $7.50 sales to merchants net you $20.00 daily. Sayers Systems, 2803 Sheffield Ave., Chicago, Ill.

HELP WANTED

U. S. GOVERNMENT wants men. $1,700—$1,900 and up at start. Railway Mail clerk examination coming. Let our expert (former Government examiner) prepare you for this and also Rural Carrier, Post Office, Customs, Internal Revenue, and other branches. Write today for free booklet, Dept. 8, Patterson Civil Service School, Rochester, N. Y.

MEN, 18 to 35. Become Railway Mail Clerks. Commence $1,900 year. Common education sufficient. Sample examination coaching—free. Write today. Franklin Institute, Dept. E-18, Rochester, N. Y.

RUPTURE Sufferers. Amazing new kind of truss with dot lock makes old-fashioned straps, cushions, heavy cumbersome devices unnecessary. Read announcement on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

MEN wanting forest ranger positions, $1,500—$2,400 year. Write for free particulars of exams. Mokane, B-21, Denver, Colo.

HOTELS Need Trained Men. Nation-wide demand for high-salaried men; past experience unnecessary. We train you by mail and put you in touch with big opportunities. Big pay, fine living, interesting work, quick advancement; permanent. Write for Free Book "Your Big Opportunity." Lewis Hotel Training Schools, Suite T-351, Washington, D. C.

FIREMEN, Brakemen, Baggagemen, Sleeping car, train porters (colored) $140—$200. Experience unnecessary. 810 Railway Bureau, East St. Louis, Ill.

MEN, Women, 18 Up. Get U. S. Government Life Jobs. $1,140 to $3,000 year. Steady work. Thousands Railway Mail Clerks — Clerks — Carriers appointed every year. Postal Salaries just raised. Experience unnecessary. Common education sufficient. List positions and full particulars —Free. Write today sure. Franklin Institute, Dept. E-3, Rochester, N. Y.

BECOME a Landscape Architect. Uncrowded profession of wonderful opportunity for money-making. Easily mastered by mail. Earn while you learn. Write for book. American Landscape School, 56-E, Newark, N. Y.

FINGER Print Experts—Excellent paying positions; particulars free. Finger Print Headquarters, 188 East 79th, New York.

BOYS—Men Wanted. Learn Auto Repairing. $30.00 week. Sample Lessons Free. Franklin Institute, Dept. E-400, Rochester, N. Y.

MR. BRUSH Salesmen—Old established New York Brush Manufacturers require the service of men in all territories to sell their extensive line of Sanitary Twisted-in Wire Brushes. We pay larger commissions than any other Brush House in the country. Write immediately for our proposition. Wire Grip Sanitary Brush Corporation, 15 Mercer St., New York.

SEAL Rupture with a Quarter. Amazing invention, weighing less than one-twenty-fifth of an ounce, banishes old-fashioned trusses, harnesses, so-called cushions, and other heavy make-shift devices. For particulars see ad on Page 151. New Science Institute, 2114 Clay Street, Steubenville, Ohio.

RAILWAY Mail Clerks. Pay raised. $158—$225 month. Steady. Particulars free. Write today. Franklin Institute, Dept. E-18, Rochester, N. Y.

EASY Money! Silvering mirrors, Autoparts, tableware, Outfits; Plans Free. Sprinkle, Plater 287, Marion, Ind.

GET posted—Good prices paid for butterflies, insects. See Sinclair display advertisement, page 14.

MEN, women, Boys and Girls, write for Bargain Catalogue Watches, Jewelry, Radios, etc. Louisiana Distributing Service, Harmon, La.

RAILWAY Postal Clerks, $1900-$2700 Postoffice Clerks, Carriers, $1700-$2300 annually. Thousands appointments annually. Many other lifetime openings. Common education sufficient. Experience unnecessary. Particulars free. Chicago Civil Service College, A-41 Kesner, Chicago.

MEN—Women, 18 up. $95.00—$250.00 month. U. S. Government Jobs. List positions free. Write today. Franklin Institute, Dept. E-18, Rochester, N. Y.

BOYS, Earn easy money by making beautiful pocket Photo-Mirrors. No machinery necessity. Ready to slip in any picture Send 10c for sample (worth 50c) and particulars. Patent Picture Frame Co., 170 Sands St., Brooklyn, N. Y.

MEN operate Watch-Jewelry Repairing Business. No experience. We teach and furnish everything. Standard Watchmakers, 252 W. 14th, New York.

$170-$225 MONTHLY, Railway Postal Clerks, Postoffice Clerks, Carriers, $145-$192 month. Customs, Internal Revenue, Departmental Clerks, $1,500 up. Information free. Chicago Civil Service College, A-141 Kesner, Chicago.

BUILD splendid business making chipped glass number and name plates, signs, medallions. Write for particulars. Simplex Utility Co., 1133 Broadway, New York.

MEN, 18 up. Railway Mail Clerks. $158 month. Particulars free. Franklin Institute, Dept. E-18, Rochester, N. Y.

MEN wanting forest ranger, railway mail clerk and other Gov't positions, write for free particulars of exams. Mokane, Dept. B-27, Denver, Colo.

MEN to build radio sets in spare time. Leon Lambert, 539-H, Wichita, Kans.

MEN—Age 18-40, wanting Railway Station-Office positions, $115-$250 month, free transportation, experience unnecessary. Write Baker, Supt., 41 Wainwright, St. Louis.

EARN $10 daily silvering mirrors, plating and refinishing metalware, autos, chandeliers, bedsteads, headlights. Outfits furnished. E. Decie Laboratories, 1133 Broadway, New York.

SILVERING Mirrors, French plate. Easily learned; immense profits. Plans free. Address, Wear Mirror Works, Excelsior Springs, Mo.

OUR genuine gold window sign letters are an excellent money-making proposition for handy men. Slann Sign System, Bethune Ave. E., Detroit, Mich.

ALL men, women, boys, girls, 17 to 65, willing to accept Government Positions, $117-$250 traveling or stationary. Write Mr. Ozment, 101 St. Louis, Mo., immediately.

STORIES, poems, plays, etc., are wanted for publication. Good ideas bring big money. Submit manuscripts or write Literary Bureau, 522, Hannibal, Mo.

MAKE money writing Photo-plays; details free to beginners. No correspondence course. Producers' League, 230 Wainwright, St. Louis.

INVENTORS desiring to secure patents should write for our book "How to Get Your Patent," tells our terms and methods. Send sketch for our examination and Instructions without charge. Randolph & Co., Dept. 418, Washington, D. C.

SEEKING Home Work? Write Institute, 11 Water, New York.

Copyrighted material

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 315 A. H. E. Building, Grand Rapids, Mich.

INFORMATION

NEW YORK City! Coming? Work or play? We help you. Street directory, map, information guide, transportation systems, hotels, theatres, interesting places, etc., 30c. List employment bureaus 10c. Guides, 326 Sixth Street, Brooklyn, N. Y.

COMPLETE, Accurate, Information on any subject $2. Prompt Service. National Information Bureau, 1429A Milton St., Grand Rapids, Mich.

ARTS-CRAFTS Library—How to make lamps, decorative lamp shades, metal etched articles, and many other useful art objects. Three cloth-bound pocket-size books. Send No Money. Just write a postal, if you live in the U. S. When the books arrive, examine them, and if you are more than pleased, pay the postman $1.50 and the few cents postage. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

WHAT Is Your Problem? Expert information, advice. Any subject, $1.00. Also formulae, supply sources. International Information Institute, 15 Moore, New York.

AUTO Tourist's Handbook—An indispensable help for those who wish to make a motor trip. Tells how to prepare your car for the long grind to avoid trouble, how to make and use camp equipment, how to cook on the road and how to make comfortable sleeping quarters. Will reduce your touring bill many dollars if you follow the ideas presented. With this we give "Auto Owner's Handbook" filled with helpful ideas for drivers. Send no money. Pay the postman $1 plus postage when he delivers the two books. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

ADVICE on any subject $1.00. Universal Bureau, 3610 Enright, St. Louis, Mo.

JUST Out—A New Boy Mechanic Book No. 4—1,289 Articles, 1,220 Pictures. Tells how to make such things as Radio Receivers, Toy Airplanes, Pushcycle, Canoe Pontoons, Diving Rafts, Electromagnets, Wind Wagon and Ice Boat, Catamaran, Motion-Picture Camera, Sidewheel Motorboat, Motor-Driven Sleds, Camp Equipment, and hundreds of other interesting devices. Price $2 postpaid. Send No Money. Simply write a postal, if you live in the U. S., saying you want Boy Mechanic Book 4. When the postman hands you the book, give him $2 plus the few cents postage. Popular Mechanics Press, 200 E. Ontario St., Room 806, Chicago, Ill.

BUSINESS SERVICE

FORMING a company? Look into the Common Law plan of organizing under a Declaration of Trust. Its economies and advantages are outlined fully in pamphlet (C-53) mailed free upon request. C. S. Demaree, publisher standard legal blanks, 708 Walnut, Kansas City, Mo.

DELAWARE Incorporator. Charters; Fees Small; forms. Chas. G. Guyer, 901 Orange St., Wilmington, Del.

SEATTLE Mail Address $5.00 Up. Forwarding Commissions executed. North Pacific Advertising & Distributing Co., R167, Seattle, Wash.

MAILING LISTS

NAMES—postcards—cuts. Ben Meyer, 35 West 31st, New York.

500 ADDRESSES of buying housewives $2.00. 200 West Main St., Manchester, Iowa.

GUARANTEED Women's Names. Send for Rates. French, 1903 E. Chase, Baltimore Md.

TYPEWRITERS AND SUPPLIES

UNDERWOOD Typewriters—only $3.00 down. Easy monthly payments. Low prices at less than manufacturers. 10 days' free trial. Rebuilt, all worn parts replaced. Just like a new machine. 5-year guarantee. Write for big free catalogue R 151. Shipman-Ward Mfg. Co., 1515 Shipman Bldg., Chicago, Ill.

TYPEWRITERS All Makes. Save One-half. Thoroughly rebuilt in our factory by the famous "Young Process." Fully guaranteed. Free trial. We handle all standard makes. Cash or sold on easy terms. Write for catalog. Young Typewriter Co., Dept. 57-57, Chicago, Ill.

TYPEWRITERS, all standard makes, $10 up. Fully guaranteed. Free trial. Write for complete illustrated lists. Northwestern Typewriter Exchange, 121 N. Francisco Ave., Chicago.

PRINTING, ENGRAVING AND MULTIGRAPHING

100 EXCELLENT Envelopes printed your return corner card, postpaid, 50c. Samples free. Howie Printers, Beebeplain, Vt.

500 THREE line gummed labels, three dimes. Wash Moore, Martinsville, Ind.

PRINTING. Lowest prices in America. Samples free. A. Pitz, Amana, Iowa.

PRINTING—100 full size Bond Letterheads and 100 White Wove Envelopes for $1.00 postpaid. Leo J. Taylor, Box 211P, Ware, Mass.

$3.00 DELIVERED, 300 Watermarked Bond Letterheads, 8½x11, and 250 envelopes, money with order. Job Printing Specialty. National Printing Company, Goshen, Ind.

225 BOND letterheads, envelopes, billheads, cards, $1.25 each. Combination, $4.00. Economic Press, Leonia, N. J.

QUALITY Printing! Reasonable Prices! Send for Free Standardized samples and prices. Folders, Circulars, Catalogs our specialty. Ernest Pantus, 525 South Dearborn, Chicago.

250 LETTERHEADS, 250 white envelopes printed and mailed $3.00. Samples printing free. Sunco, Mohawk, N. Y.

125 BUSINESS Cards $1.00; 500 $1.65. 100 Calling Cards 50c. 500 Hamermill letter heads or envelopes, raised printing, $5.50. Cash with order. Samples. Woods Printing Co., 719 St. Charles, St. Louis, Mo.

150 EACH—Letterheads, Envelopes, Business Cards, $2.00. Amos Sullivan, Printer, Fairport, N. Y.

MULTIGRAPHING, form letters. Lowest prices. Neat work. Ace Letter Shop, 721 21 Street "A," Moline, Ill.

1,000 LETTERHEADS or Envelopes, $3.00. Sent Prepaid. Samples Free. Monitor Press, Morrisville, Pa.

$2.00 FOR 125 Letter Heads, 8½x11 and 125 Envelopes. Bond paper. Delivered for cash. Pershing & Co., South Bend, Ind.

GUMMED Labels, Name and Address, 500, 2 lines 30c, 3 lines 50c. Catalogue. Eastern Label Co., A, Clintonville, Conn.

WE print Stationery, Booklets, Catalogs, Circulars. Samples. Commercial Press, Batavia, Ohio.

GUMMED Labels—3,000 $1.00. Catalog 2c. MacTaggart, 1235 Arch, Philadelphia, Penna.

DISTINCTIVE Printing! Write Requirements. Samples. Franklinpress, B-32, Milford, N. H.

LITHOPRINT Letterheads and Envelopes, 500 each, $4.50; $1,000 each $7.00. Stamp brings Samples. Lithoprint Process Company, 933-A New York Avenue, Washington, D. C.

100 BUSINESS or Calling Cards, 50c; 500, $2.00; 250 Bond Letterheads and Envelopes, $2.50. Penart Studio, Portland, Ind.

PRINTING OUTFITS AND SUPPLIES

PRINT your own cards, stationery, circulars, paper, etc. Complete outfits $8.85; Job Presses $12, $35; Rotary $150. Print for others; big profit. All easy, rules sent. Write for catalog presses, type, paper, etc. Press Company, A-11, Meriden, Conn.

MULTIGRAPH — Model 36 all attachments used once; also Multicolor Press with Autofeed. E. B. Mason, 604 Olive St., St. Louis, Mo.

PRINTING Outfits, Presses, Type, Supplies. Stamp for information. Nicholas, M-110 High St., Boston.

PRE-USED Printing Presses, Type supplies. List for 2c stamp. Popular Bargains, Richland, Pa.

USED Printing Presses, Type, Supplies. List. Norfolk Press Works, Ballentine, Norfolk, Va.

PRINTING Outfits—Presses, type supplies, type novelties. Send stamp for catalogue. Model Press, York, Penna.

DUPLICATOR AND DEVICES

STENCIL Duplicating Outfit — $2.50, $3.00, $4.00 Complete. Typewriting, Handwriting. Returnable. Primos Specialty Co., 3-M, Primos, Pa.

YOU can make 50 to 100 copies of a letter, notice, etc., at a cost of three cents on a Heyer Quality Duplicator. Write for free trial offer. The Heyer Duplicator Co., 14 S. Wells St., Chicago, Ill.

ADDING MACHINES

NEW $3.50 Automatic Adding Machine. Adds, Subtracts, Multiplies. Absolutely accurate. Capacity $999,999.99. Fully guaranteed. 75,000 pleased users. Makes adding easy, positive, quick. Eliminates Mistakes. Saves Time. Postpaid $3.50. Bassett Co., 1458-E Hollywood Ave., Chicago.

VEST Pocket Adding Machine—You Need One—accurate—handy—dependable—hundreds of satisfied users—$3.50. Erie Calculator Co., Scott Block, Erie, Pa.

FREE Trial. Marvelous new Adding Machine. Adds, Subtracts, Multiplies, Divides, automatically. Work equals $250.00 machine. Price only $15.00. Speedy, durable, handsome. Five-year guarantee. Used by largest corporations. Write today for catalog and free trial offer. Lightning Calculator Co. Dept. E, Grand Rapids, Mich.

FOR SMOKERS

TEN Pounds fine old Ky. Tobacco, sweet with age, at the following prices, plus postage: Hand picked chewing, $3.00; Selected Smoking, $2.00; Mild Sweet Smoking, $1.50. First order means your future orders; let us prove it. Van Zant Leaf Tobacco Association, Van Zant, Ky., J. W. Soraer, Agt.

NICKEL Cigars finest quality, guaranteed, union-made, $2.00 per 50 postpaid. Big reduction in quantities. Beats any dime smoke. Peoples Cigar Factory, 2232 S. Kedzie Ave., Chicago, Ill.

BOATS AND LAUNCHES

MAKE 16' Rowboat — Blueprint 30c. Weesho-Uco, 31st Office, Detroit.

BOAT Building Plans for amateurs. Rowing, sailing, speed, cruising. Free catalog. The Rudder, 9 Murray Street, New York.

BOATS that always go are propelled by Ford Engines. Ford engine booklet free to boat owners. Harry Rider, 201B East Avenue, South Norwalk, Conn.

NEW Boat Book telling how to make 21 kinds of boats. Also many other helpful ideas on boating. Profusely illustrated. With this we include the big book, "Outdoor Sports the Year 'Round." Directions for making all sorts of devices for outdoor recreation. Send No Money, if you live in the U. S. Simply pay the postman $1.50 plus the few cents postage when the books are delivered. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

RAZORS AND BLADES

SAVE Your Blades. Get 100 shaves from each Blade with my Automatic Stropper. You can do it. Price One Dollar (State Razor Used). Satisfaction Guaranteed. Geo. Stewart, 157 W. Santa Barbara Ave., Los Angeles, Calif.

36 BLADES for Gillette Razor $1.00 postpaid. Agents wanted. Rachanic Yarrington, Box 560, LaCrosse, Wis.

BLADES for Gillette razor 35c per dozen. Brand new. Live agents wanted. Razoblade Co., 2743K Broadway, New York.

DIAMONDS, WATCHES AND JEWELRY

SPECIAL! Manufacturers direct sale of guaranteed 10K solid gold cufflinks only $2.50 postpaid while they last, eliminating dealers saves half. Illustrated circular free. Theander Novelty Co., 246 Fulton St., Brooklyn, N. Y.

ANTIQUES, WAR RELICS AND INDIAN GOODS

FOR dens, exhibitions, etc. Relics from Europe's battlefields. Illustrated catalogue and sample War Photographs, 25c. International, 1889 Albany Ave., Brooklyn, N. Y.

SEND 5c for fine, new list Indian relics, antique firearms. F. E. Ellis, Webster Groves, Mo.

INDIAN Made Baskets, Blankets, Wampum, Curios. Catalog. Gilham, Kelseyville, Calif.

OPTICAL GOODS

BINOCULARS, Binoculars, Binoculars! A glass for every use and every pocketbook, 58 styles, 4 to 24 power, $2.50 to $105.00. Guarantee of absolute satisfaction or money back. Get the Geneva price list first. Send for descriptive circular today. Geneva Optical Co., 41 Linden St., Geneva, N. Y.

Copyrighted material

FOR THE HOME

GRANDFATHER'S Clock Works, $5.00. Build your own case; Instructions free; make good profits selling your friends. Clock works with chimes for old or new cases. Write for full particulars. Clock Co., Ruffner St., Philadelphia.

CONCRETE Handbook, describing 173 ways of using concrete in the home, shop and on the farm, with full directions for doing these things yourself with ordinary tools. 138 illustrations. It is "written so you can understand it." Price 50 cents, postpaid. Popular Mechanics Press, 200 East Ontario, Room 806, Chicago, Ill.

LOOMS—Only $9.90 and up. Big money in weaving Colonial Rugs, carpets, etc., from rags and waste material. Weavers are rushed with orders. Send for free Loom Book; It tells all about home weaving and quotes reduced prices and easy terms on our wonderful new looms. Union Loom Works, 480 Factory St., Boonville, N. Y.

HOME Mechanics—A new Popular Mechanics Handbook containing 329 discoveries that will be of value to anyone who has a home. 96 pages—200 illustrations. With this, we include our helpful new book "Handbook for Women." Send No Money—Pay for the books after you see them. When the postman delivers the books and you find that you are delighted with them, pay him $1 plus postage. Popular Mechanics Press, Popular Mechanics Building, Room 806, Chicago, Ill.

HOME-MADE Furniture — Popular Mechanics Mission Furniture Library tells how to make all kinds of furniture in the easiest way. It is not only cheaper to make your own, but you have a lot of fun doing it. The library consists of three cloth-bound volumes. Send No Money. Simply pay postman $1.50, plus postage, when he hands you the books. Money refunded if not delighted. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

MUSIC AND MUSICAL INSTRUMENTS

EVERYTHING Sold For Band and Orchestra — Saxophones, Banjos, Trumpets, Violins, Reeds—All accessories. Salesmen Wanted. Jay, Conns, Buescher & Kink Instruments sold. Easy Payments. Write for Prices. Sternberg's Music Shoppe, 59 East Adams Street, Chicago.

BAND and Orchestra Instruments—All makes of new and used instruments sold, exchanged and repaired. Standard and popular music sold. Write today for catalog and Free subscription to "Musical Booster" magazine. "Deal with the Professional House." Crawford-Rutan Co., 1051 Grand Ave., Kansas City, Mo.

I WANT Song Poems. Casper Nathan, 3544 N. Racine, Chicago.

$27 CHROMATIC Scale Dulcimers—$19. Played with beaters. Easy to Learn. Wonderful Instrument. Great testimonials. $1 With Order. Balance 3 days' trial. F. Rehfuss Co., LaCrosse, Wis.

PLAY piano by Ear. A Sound System. Postal brings full particulars and Free Booklet. No obligation. Boucher's Harmony Studio, 127 Metcalfe St., Ottawa, Can.

SONG Poem Writers—Have Proposition. Ray Hibbeler, D1, 4040 Dickens Ave., Chicago.

CORNETISTS—Trombonists—Saxophonists—Clarinetists. Get "Free Pointers." Name instrument. Virtuosi School, Concord, Mass.

VIOLINS — Genuine hand-made; sweet, soulful, mellow, yet powerful. Instruments of finest tonal quality. Free trial. John Lebto, 935 14th St., San Pedro, Calif.

WRITE Songs. Big money and reputation. Write for information. J. Gordon Pub. Co., 201 N. Hoyne Ave., Chicago.

"MUSIC Composed" to words. Bauer Bros., (formerly of Sousa's Band), Oshkosh, Wis.

VIOLINS, Deep, Mellow, Soulful—on credit. Easy terms for wonderful instrument. Get details today. Gustav F. Henning, 2424 Gaylord St., Denver, Colo.

PHONOGRAPHS AND RECORDS

OPPORTUNITY, get Table Phonographs, Ten Dollars Each. Catalogue. Sheafer Mfg. Co., Station E, Box 2051, Cleveland, Ohio.

PHONOGRAPH owners, agents and dealers: Would you like to hear the champion fiddler and banjo picker of North Carolina on your phonograph? Six of their best selections on three regular ten-inch, double-faced records, $1.95 postpaid. Special price in dozen lots to agents and dealers. Send for circular. J. D. Jackson, Candler, N. C.

BUILD your own Phonograph. Write for catalog and free Blue-print offer. American Phonograph Co., 3752 Belmont, Chicago.

BUILD Your Phonograph. Spring Motors, Electric Motors, Tonearms, Amplifiers, Accessories. Latest Equipment also in Radio Mechanism and Cabinets. Catalog mailed for ten cents. Hoosier Mfg. & Supply Co., 313 Baldwin Block, Indianapolis, Ind.

PATENT ATTORNEYS

PATENTS Procured; Trade Marks Registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 30 Owen Bldg., Washington, D. C., or 41-R Park Row, New York.

PATENTS and Trade-Marks obtained. Prompt service. Write for our new book on patents. Established in 1889. D. Swift & Co., 369 7th St., Washington, D. C.

PATENTS, Trade-Marks, Designs. This firm has 27 years' experience and gives expert personal service at reasonable rates. We properly protect your invention. Write for free information and exact cost of procuring patent before proceeding. John B. Thomas & Co., 902 F St., N. W., Washington, D. C.

INVENTORS—Send for form "Evidence of Conception" to be signed and witnessed. Form, fee schedule, information free. Lancaster and Allwine, Registered Patent Attorneys in United States and Canada, 221 Ouray Bldg., Washington, D. C.

MILLIONS spent annually for ideas! Hundreds now wanted! Patent yours and profit! Write today for free book—tells how to protect yourself, how to invent, ideas wanted, how we help you sell, etc. American Industries, Inc., 500 Kresge Bldg., Washington, D. C.

INVENTOR'S Universal Educator contains 900 mechanical movements; 40 perpetual motions. Tells how to obtain and sell patents. Suggests new ideas. Explains how to select your attorney and avoid patent sharks. Special price (for a limited time) $1.00 postpaid. Albert E. Dieterich, 621-B Ouray Bldg., Washington, D. C.

ESTABLISHED 1864. Milo B. Stevens Company, Free Booklet, Patents, Trade-Marks, Copyrights. Offices, Monadnock Block, Chicago; Barrister Building, Washington, D. C.

MONROE MILLER, Ouray Bldg., Washington, D. C. Patent Attorney; Mechanical, Electrical Expert. Free Blue Book gives candid advice.

PATENTS—Our book "How to Obtain a Patent" sent free upon request. Contains full information about patents, trade-marks and designs. If you will send us a sketch of your invention we will promptly make search of the Patent Office records and advise you as to patentability, our charge for the service being $5.00. Prompt, efficient service with moderate charges. Over twenty years experience. Bank and commercial references. Talbert & Talbert, Registered Patent Lawyers, 597 McGill Bldg., Washington, D. C.

COOPERATIVE Plan for safe-guarding and commercializing inventions before patenting. Write for free booklet. Ralph Burch, Patent Lawyer, Jenifer Building, Washington, D. C.

PATENTS—Write for our Guide Books and "Record of Invention Blank" before disclosing inventions. Send model or sketch of your invention for Free Inspection and Instructions. Terms Reasonable. See advertisement on pages 142 and 143. Victor J. Evans & Co., 934 Ninth, Washington, D. C.

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5893 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

PATENTS obtained by experts. Alan Franklin, Patent Attorney, 639 Cotton Exchange Building, Los Angeles, Calif.

PATENT Procured. Prompt Service, Personal, careful and efficient service. Highest references. Moderate fees. Send sketch or model for actual search and advice. George P. Kimmel, Master of Patent Law, 54 H, Loan and Trust Bldg., Washington, D. C.

McNAIER, 291 Broadway, New York. Inventions protected. Patents obtained. Moderate installment payments. Prompt, efficient, reliable service.

PATENTS—Trademarks — All countries; Engineering Dept. maintained for designing and perfecting inventions; Free patentability opinion; Booklet upon request. Graves Griffiths, Registered Patent Attorney, U. S. and Canada, 518 Pacific Bldg., San Francisco.

LAW—Advice—Fifty Cents. Reliable, Thoroughly Experienced Lawyers, Civil, Criminal, Domestic Matters. Confidential. Explanation-Blanks Free! Emmons and Emmons, Lawyers, Canton, Ohio.

STRONG, protective, moderately priced patents secured through cooperation. Booklet free. Chartered Association of American Inventors, Barrister Building, Washington, D. C.

FRED H. HAYN, M. E., formerly First Assistant Examiner U. S. Patent Office, 23 years' exp. I. W. Hellman Building, Los Angeles, Calif.

PATENTS. Trade marks, copyrights. Prompt, personal, reliable service. Over 36 years' active practice. Write for terms. Book free. Address E. G. Siggers, N. U. Bldg., 918 F. St., Washington, D. C.

"INVENTORS' Guide" sent free on request; this book contains illustrations of patented inventions and gives valuable information and advice for all who have original ideas or improvements. Frank Ledermann, Registered Attorney and Engineer, Woolworth Bldg., 1712, New York.

A FORTUNE may be yours if your idea is commercially usable. Find out before paying for patent. I tell you how and help you make the sale. Particulars free. Write W. T. Greene, 806-A Jenifer Bldg., Washing. D. C.

INVENTORS: Send sketch or model for advice and exact cost of patent. Ask for our Free book: "How to Obtain a Patent." Tells what every inventor should know. Established twenty-eight years. Highest references. Prompt service. Reasonable charges. Chandlee & Chandlee, 474 Seventh, Washington, D. C.

PATENT Application Blanks free to inventors. Patent News-D, Washington, D. C.

PERCY S. WEBSTER, Savings and Loan Building, Stockton, California. Long established organization. Send for free book on Patents.

PATENTS. My fees in installments. Advice book free. Frank Fuller, Washington, D. C.

UNPATENTED Ideas Can Be Sold. I tell you how and help you make the sale. Free particulars (Copyrighted). Write W. T. Greene, 806 Jenifer Building, Washington, D. C.

TRADEMARKS $35; Design patents $35; Copyrights $5; Booklet Free; 20 years' experience. Sanders, Registered Patent Attorney, 7 Rand-McNally Building, Chicago.

INVENTORS—Write for our Guide Book, "How to Get Your Patent" and Evidence of Invention Blank. Send model or sketch of your invention for our prompt examination and instructions free. Randolph & Co., Dept. 430, Washington, D. C.

PATENTS. Booklet free. Highest references. Best results. Promptness assured. Send model or drawing for preliminary examination. Watson E. Coleman, Patent Lawyer, 644 G Street, Washington, D. C.

HERBERT JENNER, patent attorney and mechanical expert, 606 F Street, Washington, D. C. I report if patent obtainable and exact cost. Send for circular.

FOR INVENTORS

PATENTS Procured; Trade Marks Registered—A comprehensive, experienced, prompt service for the protection and development of your ideas. Preliminary advice gladly furnished without charge. Booklet of information and form for disclosing idea free on request. Richard B. Owen, 30 Owen Bldg., Washington, D. C., or 41-R Park Row, New York.

MONROE MILLER, Ouray Bldg., Washington, D. C. Patent Attorney; Mechanical, Electrical Expert. Before proceeding, read free Blue Book.

INVENTOR'S Universal Educator contains 900 mechanical movements; 40 perpetual motions. Tells how to obtain and sell patents. Suggests new ideas. Explains how to select your attorney and avoid patent sharks. Special price (for a limited time) $1.00 postpaid. Albert E. Dieterich, 621 Ouray Bldg., Washington, D. C.

Copyrighted material

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communications strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5893 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

INVENTORS — Write for our Guide Books and "Record of Invention Blank" before disclosing inventions. Send model or sketch of your invention for our free inspection and instructions. Terms reasonable. See advertisement on pages 142 and 143. Victor J. Evans & Co., 157 Ninth, Washington, D. C.

NEW Ideas Wanted. Well-known Radio Manufacturer whose products are nationally advertised and sold everywhere wants new Radio device to sell. Will pay outright or royalty for idea or invention which is really new and salable. Address: Mr. R. F. Dexine, Room 1101, 116 West 32nd St., New York, N. Y.

PATENT Engineer, advisory, sales service, particulars free. Clardy, 356 So. Broad, Mobile, Ala.

MECHANICAL or Electrical Drawings from Sketches. Archie Stuhlfaut, 913 East 6th St., Erie, Pa.

INVENTIONS fully protected two years, $15 total cost. Particulars free. Patent News-G, Washington, D. C.

WANT Patent or Patent pending, for Manufacturers. W. F. Young, Bremerton, Wash.

PATENTS—Our book "How to Obtain a Patent" sent free upon request. Contains full information about patents, trade-marks and designs. If you will send us a sketch of your invention we will promptly make a search of the Patent Office records and advise you as to patentability, our charge for the service being $5.00. Prompt, efficient service with moderate charges. Over twenty years' experience. Bank and commercial references. Talbert & Talbert, Registered Patent Lawyers, 582 McGill Bldg., Washington, D. C.

WANTED, partner to pay fee on invention, for carpenter's half interest. J. A. Plourde, Val Diamour, N. B., Canada.

IF you have a practical, useful invention to sell, write promptly. American Patents Corporation, Barrister Building, Washington, D. C.

WE solve problems confronting you in perfecting inventions, namely — mechanical movements, materials of construction, and buying information. Send sketch. $1.00. Technical Research Bureau, 377 National Ave., Milwaukee, Wis.

INVENTORS: Sell your ideas quickly. Our booklet tells how. Sent free. The Plan Bureau, 1929 McCausland Ave., St. Louis, Mo.

PATENTS wanted for manufacturing purposes, cash or royalty. Ray Lee, Dowagiac, Mich.

MECHANICAL drawing. Difficult designs. Your ideas developed safely. Write Baskerville Engineers Co., Farley Bldg., Birmingham, Ala.

INVENTIONS Commercialized on Cash or Royalty Basis. Send us your ideas on anything built of wood, wood and glass, or all glass. In business 20 years. Complete facilities. Send sketch or model. Specialty Display Case Co., Dept. 11, Kendallville, Ind.

GET your own patents. Legal blanks, complete instructions $1. Cutting Sons, Campbell, Calif.

A FORTUNE may be yours if your idea is commercially usable. Find out before paying for patent. I tell you how and help you make the sale. Particulars free. Write W. T. Greene, 807-A Jenifer Bldg., Washington, D. C.

I SELL Patents: Established in 1900. Charles A. Scott, 773PM, Garson Avenue, Rochester, N. Y.

PATENTS Sold or placed on Royalties, both U. S. and Canadian. Patented or Pending. For immediate action, write Arthur S. Billings, Suite 401 Deknm Bldg., Portland, Oreg.

UNPATENTED Ideas Can Be Sold. I tell you how and help you make the sale. Free particulars (Copyrighted). Write W. T. Greene, 807 Jenifer Building, Washington, D. C.

PATENTS. If you have an invention which you wish to patent you can write fully and freely to Munn & Co., for advice in regard to the best way of obtaining protection. Please send sketches, or a model of your invention and a description of the device, explaining its operation. All communications are strictly confidential. Our Hand-Book on Patents is sent free on request. This explains our methods, terms, etc., in regard to Patents, Trade Marks, Foreign Patents, etc. "Scientific American" contains Patent Office Notes, Decisions of interest to inventors and particulars of recently patented inventions. Munn & Company, Solicitors of Patents, 623 Woolworth Building, New York; 524 Scientific American Bldg., Washington, D. C.; 413 Tower Bldg., Chicago, Ill.; 366 Hobart Bldg., 582 Market St., San Francisco, Calif.; 221 Van Nuys Building, Los Angeles, Calif.

WILL finance patent (good invention) for interest. F. A., % Patent News, Washington, D. C.

RESPONSIBLE established electrical manufacturer will buy outright or manufacture on royalty new inventions of household utilities or appliances. Details necessary. L. J. Efferth, 6545 Carnegie Ave., Cleveland, Ohio.

HAVE You an Invention? If so, write for our free book, "How to Get Your Patent," tells our terms and methods. Send model or sketch for our free examination and instructions. Randolph & Co., Dept. 144, Washington, D. C.

PATENTS FOR SALE

FOR Sale—Patent on seed-covering attachment for agricultural implements. A valuable invention which could be manufactured at a minimum cost. Will sell outright or on royalty. For particulars address F. H. Grams, Stewart, Minn.

TWO sensational inventions, boxing and bag punching Kangaroos. Patented April 21, 1925, United States and Canada. Human in action, mechanical, no motors or springs, amazing street sellers Toys, always in action. B. Baker, 224 Kasota Building, Minneapolis, Minn.

PATENTED Indicators. Stamped parts. Outright or royalty. Tyson T. Ferree, Asheboro, N. C.

$4,000.00 BUYS my United States and Canadian Patents rights—Cotter Pin Expander and Puller. Particulars Address, Joseph Ledlver, May, Idaho.

WANTED manufacturers to manufacture a 2-groove drive pulley for Fords or patent for sale. Write J. J. Barry, 1720 S. Bloomington St., Streator, Ill.

PATENT No. 1,491,319: Fastener for collars. Outright only. Very simple to manufacture. Safe, Economical, Durable. Walter J. Soth, Submarine Base, Pearl Harbor, T. H.

FOR Sale, U. S. and Canadian Patent, Pneumatic Tire Protector. Goes between shoe and inner tube, in sections, made of thin pressed steel. Puncture impossible. Big Money maker. C. Taylor, 15 Cross St., Newport, R. I.

OUTRIGHT or Royalty—Tin Toy miniature refinery. Easily manufactured at low cost. Patent pending. Geo. Miller Box 83, St. Louis Park, Minn.

JIMMY proof mortise door lock without projecting bolt while door is open; snaps automatically when door is closed. H. Rein, 239 West 91st St., New York.

OUTRIGHT or royalty, patent on "The Radio Pipe." Exact resemblance of a miniature Loudspeaker. D. L. Stronach, 1066 Price Ave., Columbia, S. C.

FOR Sale—Outright or royalty; Patent on New Ford accessory, Automatic Spotlight Bracket; moves the spotlight with the steering gear. Fine mail order proposition; costs 16c to make, sells $1.50. G. W. Human, 1401 Weller Ave., Laporte, Ind.

OUTRIGHT or Royalty, newly patented "Spring Shoes," a fascinating amusement for boys and girls. Elmer Menefee, P. O. Box 562, Zanesville, Ohio.

FOR Sale—Patent No. 1,533,483, also applied in Canada, on Exhaust Gas Remover. New device removes gases outwardly of garages. Associated with electric fan. Wonderful possibilities. Jack Voss, Boyden, Iowa.

PATENT Pending—Automobile gasoline gauge. Gives reading in gallons on the gasoline tank, also on a meter mounted on driver's dashboard. Electrically operated from the car's storage battery. Absolutely fireproof and positive in action. Advertiser, Box 574, Sta. "C," Los Angeles, Calif.

ATTENTION, Manufacturers: Have patented comb. For Sale or Royalty. Chas. F. McCoy, Versailles Ave., McKeesport, Penna.

PATENT—Only practical Stop Direction Signal on automobiles. Sale or royalty. P. Cox, 820 Cass St., Chicago.

MR. INVENTOR: If you have a patent or invention for sale, write Hartely, 44 Central St., Bangor, Me.

PATENTS — No. 1,534,335 — Automatic Label Pasting Machine. No. 1,521,936—Adjustable Molder's flask. Will sell outright or arrange for manufacture on royalty basis. Write Clarence P. Hartman, 354 South 4th St., Reading, Pa.

PATENTS For Sale: To sell, buy or obtain patents, write Patent News-P, Washington, D. C.

MR. MANUFACTURER, Layman or veteran—Side Dump Scraper Hoist, loads wagons, does ditching. E. B. Hawkins, Applegate, Oreg.

UNITED STATES and Canada Patents for Sale. Boltless Rail Joint. Superior to anything invented. For full particulars write to William Depew, Pequaming, Mich.

PATENT for Sale on greatly improved stop and signal light for automobiles. Indicates direction of turn, etc. Exceedingly attractive and efficient. Rings bell to attract attention of pedestrians and other autos. Will sell for best offer. Write for particulars. Geo. W. Michael, 29 Stark St., Wilkes-Barre, Pa.

FOR Sale, Patent, Improved Flour Sifter, Outright or Royalty Basis. Harry Nakagawa, Tanana, Alaska.

PATENT Book Free. Charles W. Lovett, Patent Attorney, Lynn, Mass.

YOU have a worth-while patent, haven't you? Why don't you tell our two million readers about it? Most of them are specially interested in patents and new inventions. Ask me to tell you how other inventors successfully sold their patents. Geo. F. Baker, Manager Classified Advertising, Popular Mechanics Magazine, Chicago, Ill.

DRAWING INSTRUMENTS AND DRAFTING SUPPLIES

MECHANICAL Drawing — A Practical Course in Mechanical Drawing has helped thousands. It is simple enough for a boy, yet advanced enough for a trained mechanic. Cloth bound, pocket size, illustrated. Only 50 cents. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

SURVEYING INSTRUMENTS

LARGEST stock of new and used surveying instruments in the country direct from factory. Satisfaction guaranteed or money refunded. Wissler, 619 N. Broadway, St. Louis.

MODELS AND MODEL SUPPLIES

PATENTS. Time counts in applying for patents. Don't risk delay in protecting your ideas. Send sketch or model for instructions or write for Free book, "How to Obtain a Patent" and "Record of Invention" form. No charge for information on how to proceed. Communication strictly confidential. Prompt, careful, efficient service. Clarence A. O'Brien, Registered Patent Attorney, 5893 Security Bank Building (directly across street from Patent Office), Washington, D. C. See pages 140 and 141.

SEND 5c for catalog of Plans, Parts and Suplies for Model Aeroplanes; also special parts and models made to order. Ideal Aeroplane Co., 167½ Spring St., New York.

COMPLETE instructions and detail working drawings for building Ship's models. $2.00. W. Fritsche, 511 Chapel St., New Haven, Conn.

THE Modelmaker. For those interested in making working models. Send 10 cents. Address P. M. 120 Liberty Street, New York.

WE make working models for inventors and do experimental work and carry a complete stock of brass gears and model supplies. Send for catalogue. The Pierce Model Works, Tinley Park, Ill.

SPECIAL machinery, experimental work, tools, jigs, fixtures, and dies for all kinds of metal stampings. C-P Tool Co., Precision Toolmakers, 1313 Lake View Place, Seattle, Wash.

DIES, Tools and General Manufacturing. Models and Manufacturing of new inventions our specialty. Logan Machine Co., 126 S. Clinton St., Chicago, Ill.

Copyrighted material

WE make models, dies, tools. All kinds of light manufacturing. Design and build special machinery. Badger Tool & Mfg. Co., 134 So. Clinton St., Chicago, Ill.

MANUFACTURING

METAL-CRAFT — Eventually — Metal-Craft. Competent Engineers, Designers and Producing Organization await your commands on dies, stampings, die-casting, deep pressing, screw-machine and wire products. Plating. Enameling. Burnishing. Assembling. Wrapping and Packing to your specifications. Large completely equipped plant which guarantees prompt, efficient service. It is not the quality of raw materials alone, nor the precision in manufacture, and not just the service rendered that has given Metal-Craft the good reputation they bear—but all of these, as a constant certainty, in Combination. Estimates promptly furnished. Metal-Craft Manufacturing Company, Box 239-W, Chicago.

METAL Stampings, Dies and Special Machinery. Mail us your drawing or sample for estimate. Send for our free catalogue of Model Supplies. The Pierce Model Works, Tinley Park, Ill.

WANTED: Patents wanted for manufacturing. Reference Dun or Bradstreet. Efficiency Engineering Company, Keenan Bldg., Pittsburgh, Pa.

PATENTED Articles, Models, Brass Work, Machine Construction; Dies Made. Baum's Metal Specialties, Kansas City, Mo.

IRON, Brass, Aluminum Castings, Models, Patterns, Light Manufacturing. Welch Brothers Co., North Chicago, Ill.

Our factory will make your models, manufacture your articles as well as build your tools, dies and fixtures. Standard Die & Specialty Co., 1932 W. Austin Ave., Chicago, Ill.

WIRE goods made to order. Cooley Mfg. Co., 530 N. Western Ave., Chicago.

WANTED—Meritorious articles to manufacture. Dependable Mfg. Co., Streator, Ill.

PATTERNS, wood and metal. Models, tools and dies. Brass, bronze, aluminum and iron castings. Screw machine work, production work of all kinds. Write Modern Machine & Pattern Co., Terre Haute, Ind.

FOR MECHANICS

SHOP Notes—The standard handbook for shopmen of all kinds and for amateurs. Has been published yearly for 20 years. 15 volumes still available. The complete library of 15 volumes, $7.00. Odd volumes 50 cents each. 1925 issue now ready. Send No Money. Simply write a postal saying, "Send me the Shop Notes Library." When the postman delivers the books, pay him $7 plus the few cents postage. Popular Mechanics Press, Room 805, Popular Mechanics Building, Chicago, Ill.

CARPENTER'S Handbook. The newest of Popular Mechanics useful books. For amateurs or professionals. 366 ideas on short cut methods of using wood-working tools. Tells how to do the many types of carpenter work needed about your home. Articles on veneering, mitering, siding, shingling, cabinet work, planing, stair building, routing, drilling, furniture making, lathing, milling, roofing, flooring, and all the other phases of carpenter work. Send No Money. Simply write a postal, if you live in the U. S., and say you want the New "Carpenter's Handbook." When the postman hands you the book, give him $1 and the few cents postage. Popular Mechanics Press, 200 E. Ontario St., Room 806, Chicago, Ill.

MACHINERY, TOOLS AND SUPPLIES

NO. 60 Heald auto cylinder grinder, $750. One U. S. Milling Machine $125. 20" Silver drill press $55. 15" Hendy shaper $215. 16"x6' Porter engine lathe $175. 20"x16' Lodge and Davis engine lathe, taper attachment, $550. Terms to suit on single machine or complete shop. Complete line machine and supplies. Cincinnati Machinery Supply Co., 218 E. Pearl Street, Cincinnati, Ohio.

AUTOMATIC Wrench. Every mechanic and motorist prospective buyer. 100% profit. Mechanical revelation; $1 postpaid; Agencies open. B. U. Company, 145 Church St., New York.

CONCRETE Building Block Machines and Molds. Catalogue free. Concrete Machine Co., 5 North Main St., St. Louis, Mo.

ENGINES, MOTORS AND DYNAMOS

ALTERNATING current, single phase, sixty cycle, new General Electric motors, ¼ H.P.—$14.75; ½ H.P.—$34.00. Many other bargains both new and rebuilt. Tell us your needs. Send for our complete price list. Hyre Electric Company, 615 AY So. Dearborn Street, Chicago, Ill.

$75.00 WILL buy a brand new 4 Cyl. Motor that can be used for Farm Lighting Outfit, Stationary Engine, Autos, Trucks, Tractors, Motor Boats and for many other purposes. Maximum speed 2,900 R. P. M. Starter and Generator included. Act now. Fox Auto Parts Co., 57 East 26th St., Chicago.

MOTORS, $2.98, good, practical, 115 Volt alternating-direct current, twentieth horsepower. Order now. Pay postman. Perry Trading Co., Dept. M7, 815 Lake, Racine, Wis.

ELECTRIC motors, fans, irons, etc., repaired. J. D. Bailey, Fitzgerald, Ga.

FINAL reductions — Motor Generators, 25-volt, 8 amp., with ½ horse single-phase alternating motor, $32.50. With three-phase motor, $20.00. Also bargains in motors, generators, etc. Queen City Electric Co., 1736 W. Grand Ave., Chicago, Ill.

BATTERY charging pays big. Profits pay for outfit. Easy terms. Hoberth, Troy, Ohio.

BENDING MACHINES

THE famous Hossfeld Wrenchless Universal Bender is the last word in bending machines; bends metal, cold or hot, into most any conceivable shape, including Eyebolts and Automobile Spring Eyes. Bends up to 1" bars or 1¼" Pipe cold. Used by the largest corporations, yet so inexpensive that even a farm shop need not be without one. Send for circular. Hossfeld Mfg. Co., Box 344, Winona, Minn.

SPECIAL Low Prices on the Following Used Machinery: 1 Pipe Bending machine to bend 1¼"x4½". Bends one set of Formers. Write for full details. Baker Ice Machine Company, Omaha, Nebr.

BLACKSMITHS

BLACKSMITHS, Listen! Make more money doing hard jobs easy with Toy's Modern Methods of Master Machine Blacksmithing, Forging and Solid Welding, Tool Dressing and Tempering to a standard with colored tempering charts. All for One Dollar. Samples Free. W. M. Toy, Sidney, Ohio.

ELECTRICAL

FOR Sale—Battery chargers, tungars, mercury arcs and motor generator sets. Satisfaction guaranteed. Sold subject to trial and approval. What have you to trade in on Constant Potential outfits? Write Ira Holmick, Troy, Ohio.

ELECTRICAL Kinks. The 214 articles in Everybody's Handbook of Electrical Kinks tell how to do the various electrical jobs that are common in this day of electricity. For amateurs or professionals. Ideas on wiring, making electrical devices, electric lighting, transformers, motors, generators, switches, installation, testing, repairing, battery manufacture and repair, and telephones. Send No Money. Simply write a postal, if you live in the U. S., and say that you want the Electrical Kinks book. When the postman hands you the book, give him only $1 and the few cents postage. Popular Mechanics Press, 200 East Ontario, Room 806, Chicago, Ill.

ELECTRICAL and Hydraulic Problems Solved. Design, Operation, Application. Write Me. John P. Garvin, E. E. 1007 Mills St., Wilkinsburg, Pa.

FOR SALE—MISCELLANEOUS

NEW Gearhart Knitter, complete, $35.00. H. Brase, Battle Creek, Nebr.

$250.00 LONG-EAKINS Crispette (complete) outfit, like new, $150.00. Old Showmans-Storage, 1227 College Avenue, Philadelphia.

CATCH Fish; New lure makes them bite. Trial Tube 35c postpaid. Fur Fame Bait Company, Box A, Fremont, Ohio.

FOR Sale—Complete Equipment for battery shop. Write F. S. Gattler, 411 13th Ave., Columbus, Ohio.

HAMMOND folding multiplex typewriter, like new $50.00 fine Eastman postcard kodak sell or trade for firearms. Liss, No. 5 South Fifth, Minneapolis, Minn.

FRESH Georgia Peaches $2.50 Crate. One or more crates by Express. Nichols Farms, Box 1919, Atlanta, Georgia.

DELICIOUS Orange Blossom Honey. Five-pound cans $1.25. A. B. Sams, Box 4264, Jacksonville, Fla.

ADDRESSOGRAPHS, Letter Folders, Multigraphs, Envelope Sealers, Duplicators, less than half price. Guaranteed. Pruitt Co., 117 N. Market, Chicago.

WANTED—MISCELLANEOUS

CASH—highest prices paid immediately for old-time antique furniture, all kinds; also for gold, platinum, silver and diamonds. Merchandise returned if offer refused. Send goods direct or write for free list. Cash Antique Exchange, 2201 North Pulaski, Baltimore, Md.

CASH Paid for a 20 volume set of Haggard, complete years of Golden Days or Scrap Book. W. E. Bennett, 2305 Indiana, Kansas City, Mo.

WANTED—Omnigraph, five or fifteen dial, in good shape. Geo. Kennedy, Box 4110, Strathcona, Alta., Can.

GOT something to swap? Write me, enclosing reply postage. Vitalis Malloy, Dept. 27, Johnsonburg, Penna.

MAIL us your discarded Jewelry, Gold, Crowns and Bridges, Watches, Diamonds, Silver, Platinum, and old False Teeth, Money promptly mailed. Goods returned if offer refused. United States Smelting Works, (The Old Reliable). Dept. 71, Chicago.

REAL ESTATE, FARM AND ORCHARD LANDS

$5.00 DOWN, $2.00 monthly, buys 2½ acres No. Michigan Fruit or Poultry Farm, Camp Site or Summer Home. $100.00. Burt Lake, Cheboygan County. Finest hunting, fishing, boating, swimming. Good auto roads. Get free booklet and map. O. Hermann, 140 So. Dearborn St, Chicago.

53 ACRES, Horse, 3 Cows, Furniture, Crops, Tools—$1,900. Convenient hustling R.R. town and pretty lake; heavy-cropping fields, brook watered, apple and cherry orchard; good home, 6 rooms, delightful outlook, farm bldgs. Only half cash. Details pg. 20, new 196 pg. Catalog. Free. Strout Farm Agency, 255-P, 4th Ave., New York City.

KEEP well informed about Florida. Read Florida Earth. The only Real Estate Trade Journal in the State. Published Weekly. Send 25c for one month's trial. $4.00 per year. Orlando, Fla.

HERE'S your land! $10 down and $10 a month buys 20 acres of my best land in Cent. Mich., for $400, or 10 acres for $200. Write at once for free 48-page picture book. G. W. Swigart, P1259 1st Natl. Bank Bldg., Chicago.

PECAN-ORANGE Groves "On the Gulf" $10 monthly. Guaranteed care. Soon produce $500.00 yearly. Suburban Orchards, Dept. M, Biloxi, Mississippi.

$5.00 DOWN, $5.00 monthly; 10 acres unimproved poultry, fruit, stock, woodland; $100; Ozarks. Fishing, hunting, trapping. Alvin Zimmermann, 1800 N. Fifth, Kansas City, Kans.

SELL your property quickly for cash, no matter where located. Don't pay big commission. Particulars free. Real Estate Salesmen Co., Desk B, Lincoln, Nebr.

ATTENTION!!—"Get acquainted." Cash for your property, Farm, Hotel or retail store, no matter where located; confidential service. Hayes Business Agency, Cincinnati, Ohio.

DOGS AND PETS

BEAUTIFUL registered bull pups $15. Bulldogs. 501 Rockwood, Dallas, Texas.

ATTENTION: Raise Fur Rabbits. Enormous Profits. Stamp for prices, particulars. Pine Grove Fur Farm, Sault Ste. Marie, Michigan.

CHILDREN'S healthy comrades. Redblacks $30.00. Greennook Kennels, 4 Oshkosh, Wis.

IMPORTED Pups and Grown Dogs. Veri-Best Police Dog Kennels, Portland, Ind.

Copyrighted material

POULTRY

FARMER'S Handbook—Filled with discoveries made by farmers who have found ways to save time and labor. 270 pages, containing 861 discoveries on all phases of farm work. 683 illustrations. Send No Money. Wait till the postman delivers the book. If you are more than delighted, pay him $1 plus a few cents postage. Popular Mechanics Press, Room 806, Popular Mechanics Building, Chicago, Ill.

PERSONAL

HEALTH Problem Solved: Invaluable 80-page book defining "Nature's Laws of Health." Modern and authentic. Postpaid only 20c. Address author, Dr. J. Aal Larsen, Box 437, Seattle, Wash.

SEND Specimen Handwriting for vocational analysis. Pay $1.00 if correct. Graphologist, Box 665L, Dallas, Texas.

LEARN Bricklaying in a School run by Building Contractors. Circular Free. Associated Building Employers, 316 A. B. E. Building, Grand Rapids, Mich.

FREE—Stop using tobacco. We will give free information how to conquer habit easily and permanently. Results guaranteed. Anti-Tobacco League, Box K, Omaha, Nebr.

TOBACCO or Snuff Habit cured or no pay. $1.00 if cured. Remedy sent on trial. Superba Co., TP, Baltimore, Md.

GENEALOGIES, Families, Absents, Heirs, Estates, Successions, Searched in all countries. Successful system since war; confidential; low charges. Write; Central Postal Box 293, Montreal, Can.

FOR THE SHOP

SHOP NOTES Book for 1924, comprising the 550 articles that have appeared in the Shop Notes section of Popular Mechanics during the past year. Bigger and better than ever. 242 pp., 455 ills., 50 cents postpaid. Popular Mechanics Book Dept., 200 E. Ontario St., Chicago.

MECHANICS! You will seldom if ever get stuck on a job if you keep on hand for quick reference a 14-volume set of Popular Mechanics Shop Notes. At the price of 50 cents a volume, any one of the several thousand time and labor-saving kinks may save you cost many times over. Popular Mechanics Book Dept., 200 E Ontario, Chicago.

MISCELLANEOUS

FREE — Artists, Painters, Decorators, Sepia Brown in twenty parts orange, one black. Proportions from mixing many beautiful colors free. Art Publishers, 2033-35 College, Indianapolis, Ind.

ARE You Old at Forty? See our advertisement on page 147 of this issue. The Electro Thermal Company, 2137 Main Street, Steubenville, Ohio.

INK-Powder. Make your own writing ink and save money; all colors, 25c a package. L. Sinkens, Box 300, Station A, Boston, Mass.

JUST Out—A New Boy Mechanic Book No. 4—1500 Articles, 1320 Pictures. Tells how to make such things as Radio Receivers, Toy Airplanes, Pushcycle, Canoe Pontoons, Diving Rafts, Electromagnets, Wind Wagon and Ice Boat, Catamaran, Motion-Picture Camera, Sidewheel Motorboat, Motor-Driven Sleds, Camp Equipment, and hundreds of other interesting devices. Price $2 postpaid. Popular Mechanics Book Dept., 200 E. Ontario St., Chicago.

GET posted—Good prices paid for butterflies, insects. See Sinclair display advertisement, page 14.

TATTOO Remover. Complete with instructions $1.00. Guaranteed Tattoo Outfits $1.00 and up. Milton Zeis, Box 162, Saint Paul, Minn.

WEEDS—Cut them with cutter bar on Shaw Garden Tractor. Also plows, cultivates and runs belt machinery. Low prices. Immediate delivery. Shaw Manufacturing Company, Department C, Galesburg, Kans.

"TATTOORID," safe tattoo remover; no needles, trial package $1. Vestvold Co., 952 42nd St., Brooklyn, N. Y.

LOCKSMITHS—Write for Safe Combination Secret; it opens a standard safe. C. L. Mitchell, Temple, Tex.

MINERAL Wealth under Foot. Learn to find it. Cash it in. Information 10c. Thousands profit, so can you. Buskett, Joplin, Mo.

A PENCIL sketch of your face, 11" by 14". Send photo and $1.00. A. W. Sennmann, 2101 Liberty Avenue, Terre Haute, Ind.

DYKE'S Automobile Encyclopedia. 13th edition, new, greater than ever, entirely rewritten and rearranged. Contains greatest array of automobile facts ever published in one volume. Separate books containing same information cost $21. Over 1200 pages and 4100 illus. Cloth $6. Flex. Amer. Morocco $7.50 postpaid. Popular Mechanics Book Dept., 206 E. Ontario St., Chicago.

CUTS anybody can make. Simple, cheap process. $1. Specimens, particulars, 2c stamp. M. Day, Windfall, Ind.

EASY Money! Silvering mirrors. Auto-parts, tableware. Outfits; Plans Free. Sprinkle, Plater 288, Marion, Ind.

AUTO Tourist's Handbook—An indispensable help for those who wish to make a motor trip. Tells how to prepare your car for the long grind to avoid trouble, how to make and use camp equipment, how to cook on the road and how to make comfortable sleeping quarters. Will reduce your touring bill many dollars if you follow the ideas presented. With this book we give "Auto Owner's Handbook" filled with helpful ideas for drivers. Send no money. Pay the postman $1 plus postage when he delivers the two books. Popular Mechanics Press, Room 803, Popular Mechanics Building, Chicago.

GREAT Strength Easily Obtained. Booklet free. Prof. Dryer, Box 1850, Chicago.

ARTIFICIAL Eyes. Booklet free. Denver Optic, 559 Barclay, Denver, Colo.

HOMEOPATHIC and Biochemic preparations sent postpaid to all parts of the world. Manual and booklets free. Halsey Bros. Co., 111 N. Wabash Ave., Chicago, Ill. Established 1855.

FORMS to Cast Lead Soldiers, Indians, Marines, Trappers, Animals. 151 Kinds. Send 10c for Illustrated Catalogue. Henry Schiercke, 1024 72nd St., Brooklyn, N. Y.

ART Metal Workers—You will find our book "Metal Work and Etching" a complete manual on making book ends, desk sets, pad corners, paper knives, letter openers, stationery racks, rocking blotters, desk calendars, arts and crafts jewelry, etc.; 96 pp., illus. Price 50 cents postpaid. Popular Mechanics Book Dept., 206 E. Ontario St., Chicago.

Why Good Dancers Are Popular

EVERYONE admires and wants to dance with the person who knows the latest steps. There is no need of being a wall-flower! By my remarkable new easy method **anyone** can learn the newest dances at home in a few hours. Much less expensive than from a personal teacher. No music or partner needed. So simple even a child can learn quickly. **250,000 have learned dancing by mail.** Your own success **is guaranteed.**

To prove I can quickly and easily make you an accomplished dancer, I will send you **FREE** in plain cover, a lesson in Fox Trot, Secret of Leading, How to follow successfully, The Correct Dancing Position and How to Gain confidence. To pay the cost of mailing, handling, etc., send 25c. Learn in private—surprise your friends. Act now and be a good dancer soon!

ARTHUR MURRAY, Studio 470, 801 Madison Ave., NEW YORK

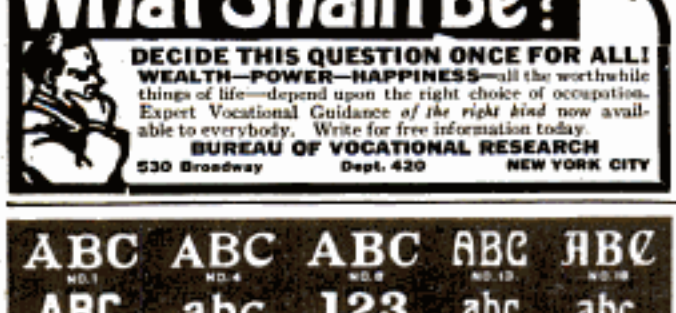

CHICAGO
TECHNICAL
[22nd YEAR] COLLEGE

Intensely practical training in **Drafting and Engineering—civil, mechanical, electrical, structural—Architecture.** 2 year Diploma; 3 year B.S. Degree; special short courses. Courses adapted to **your** needs. No time wasted. Instructors are experts. Our graduates are in constant demand. Opportunities for part-time work while studying. Day and evening classes. Athletics. Enter any time. Low tuition—easy terms. Write for 52-page illustrated Blue Book, describing opportunities open to our graduates. Chicago Technical College, H. 50—Chicago Tech. Building, Chicago, Ill.

TO GET DOLLARS OUT OF WATCHES.
WATCH-REPAIRING. ENGRAVING. JEWELRY REPAIRING.
WRITE NOW.
ENICAR TRADE SCHOOL
530 W MONUMENT SQUARE. RACINE, WIS.

X-RAY. Learn This

fascinating and profitable profession. Start any time. Takes 3 to 9 mos. Graduates now getting big pay.
Write for full particulars to
NATIONAL SCHOOL OF X-RAY, Peoria Life Bldg., Peoria, Ill.

SIGNS & SHOW-CARDS Painting Made Easy

You too, can paint attractive signs and showcards with the aid of Letter Patterns. Simply trace around the letter pattern and fill in. You will be astonished how quickly you can paint a sign by this method. These patterns are cut from durable oiled stencil board with smooth edges, which allow for rapid outlining. Each alphabet contains all the letters and the character &. **Send stamp for free sample** or better still order a few sets, and you soon will want more.
Price Each Alphabet, 1½ in. **50c**, 2 in. **60c**, 3 in. **75c**, 4 in. **95c**, 6 in. **$1.50.** Nos. 6, 14, and 19 Lower Case made only as follows: 1 in. **50c**, 1½ in. **60c**, 2 in. **80c**, 3 in. **75c.**
Price of Set of 10 Numerals, 1½ in. **25c**, 2 in. **30c**, 3 in. **35c**, 4 in. **45c**, 6 in. **70c.**
Order by Number and give size. All orders from this advertisement receive prompt attention and will be sent by parcel post.
JOHN F. RAHN, A2433 N. Greenview Ave., CHICAGO, ILLINOIS

Copyrighted material

STOP USING A TRUSS

Do Away With Steel And Rubber Bands

FREE TRIAL

Inner surface is made adhesive to secure the PLAPAO-PAD firmly to the body, keeping the PLAPAO continually applied and the pad from slipping. No straps, buckles or springs attached. Soft as velvet—easy to apply.

It's the Non-Slipping, yet Non-Rigid Pad and What is Within It That Counts

FREE to 5,000 Truss Sufferers

To the extent of 5,000 sufferers who may apply I will send, ABSOLUTELY FREE, a sufficient quantity of the Plapao to positively convince them that this is the only logical, common-sense way of treating rupture. Plapao is a highly astringent medication placed within the Plapao-Pad and being absorbed through the skin, creates a wonderful feeling of relief and at the same time tends to strengthen the weakened muscles and thus permanently close the rupture opening. The process of recovery is natural, so you'll have no use for a truss—you can throw it away forever! Old and young have testified under oath that the Plapao-Pads cured their rupture—many of them long-standing, aggravated cases—without delay from work. Patent allowed in U. S. and foreign countries. Awarded Gold Medal at Rome and Grand Prix at Paris.

Send No Money—for a sufficient quantity of the Plapao is sent without charge to enable you to give it a thorough test; you pay nothing for this trial now or ever. Write for it and full information today. Address

Plapao Laboratories, Block 1427 St. Louis, Mo.

BE A FINGERPRINT EXPERT

Earn from $2,500 to $10,000 in this interesting profession. Experts are in demand in over five hundred cities. Government now has six bureaus. Plenty of opportunities for you to organize your own bureau under our direction, and in your own town. Write for information to:

WASHINGTON SCHOOL OF IDENTIFICATION
Washington, D. C.

Andre's ACNE CREAM for PIMPLES-BLACKHEADS · ECZEMA ·

Skin Eruptions—Enlarged Pores; Scaly, Oily, Shiny and Itching Skin —Softens and Whitens the Skin.

IMMEDIATE RESULTS

Antiseptic — Germicidal — Astringent

Send No Money—Pay on Delivery

ANDRE & CO. 4029 Cottage Grove Avenue Chicago, Ill.

Send Parcel Post Prepaid C.O.D. $1.25 Large Jar Acne Cream.

Satisfaction Guaranteed or Money Refunded

Name.....

Address..... [AGENTS WANTED]

Let Me Put PEP into You!

STRONGFORT, the Perfect Man

Let me show you what it means to be filled with energy, initiative, vim and vigor! No man who isn't physically fit can get half the joy out of life. You can't achieve anything worth while if you are only half a man—weak—sickly—anemic—cursed with chronic ailments and weaknesses that make living a misery. You can't make a success of anything if you have allowed your vital forces to ebb away. You know it, down in your heart, as well as I do, that some day, sooner or later, you will have to do something to pull yourself out of the slough of physical failure and weakness. The longer you put it off, the worse your condition will be. **DO IT NOW.**

STRONGFORTISM

The Modern Science of Health Promotion will build up your Body and Brain and make a real red-blooded man out of you, no matter what your condition is or what caused it. I guarantee it.

Mark the subjects on the free consultation coupon (write other weaknesses on extra line) on which you want **special confidential information** and send with 10c to help pay postage, etc., on my free book—"**Promotion and Conservation of Health, Strength and Mental Energy.**" It contains a priceless message for every man who earnestly desires to be strong, healthy, vital. Send for my free book. **Right Now. TODAY.**

LIONEL STRONGFORT

Founded 1895

Physical and Health Specialist

Dept. 1800 Newark, New Jersey

FREE CONSULTATION COUPON

Mr. Lionel Strongfort, Dept. 1800, Newark, N. J.—Please send me your book, "**PROMOTION AND CONSERVATION OF HEALTH, STRENGTH AND MENTAL ENERGY.**" for postage on which I enclose a 10c piece (one dime). I have marked (X) before the subject in which I am interested.

.. Colds	.. Catarrh	.. Weak Eyes
.. Asthma	.. Blackheads	.. Gastritis
.. Hay Fever	.. Insomnia	.. Increased Height
.. Obesity	.. Short Wind	.. Heart Weakness
.. Headache	.. Flat Feet	.. Poor Circulation
.. Fear	.. Stomach Disorders	.. Skin Disorders
.. Thinness	.. Constipation	.. Neurasthenia
.. Rupture	.. Biliousness	.. Despondency
.. Lumbago	.. Torpid Liver	.. Round Shoulders
.. Neuritis	.. Indigestion	.. Lung Troubles
.. Neuralgia	.. Nervousness	.. Weaknesses (Specify)
.. Flat Chest	.. Poor Memory	.. Muscular Development
.. Deformity (Describe)	.. Rheumatism	.. Great Strength
.. Diabetes	.. Pimples	
.. Female Disorders	.. Falling Hair	

Mention other ailments here.....

Name.....

Age..... Occupation.....

Street.....

City..... State.....

Copyrighted material

Would $86.75 A Week

THIS boy is making that, and more, in his garage. He is Earl Hatfield, just one of the 20,000 **Michigan State (Detroit)** trained men. He's a happy looking young fellow, isn't he? You would be, too, if you were in his shoes. **You can be in his shoes if you will do what he did.**

What did he do? Well, three things—**he looked around,** saw eighteen million automobiles in the U. S. A. alone. **Then he looked ahead,** saw himself either making money in maintaining some of those eighteen million, or else puttering along at poor pay in a little common rut. Then the third thing he did was **get busy** and prepare himself to get out of the rut and keep out of it, and to make money in business for himself.

Hatfield is just a plain fellow. **Probably no brighter nor smarter nor with any more education than you.** But he saw where the money was and what he had to do to make it.

And he's **just starting** on his real success. He will keep growing bigger and making more money. Opportunities are open everywhere to ambitious trained men. Thousands more good mechanics are needed at big pay. More garages, electric service stations, battery shops, etc., are needed everywhere. Men who know this business, as we can teach it to you, are making big money.

You Can Make Big Money Too

No Experience Needed

You can make big money in the auto business too, with right training. Just a few weeks of real work here at Detroit, the Auto Center, will start you right. No age limit. No education or experience needed. With just a liking for Mechanics—you can learn the auto business from A to Z in a few weeks here in Detroit—the **heart** of the industry. **Head and Hand training** with actual practice in doing the work, makes you an all-around Auto man. Step out now—be a trained man and start to get ahead to **that big money.** We have more jobs offered to our graduates than we can fill.

Come to Detroit the Auto Center

Learn Autos Where Autos Are Made

Learn at the factory-endorsed School, on up-to-date equipment, with expert instructors. You have big advantages learning the business here. It is the fountain head of the Auto business. You are taught under factory-endorsed methods. You learn both theory and practice on latest equipment—not just a "Rush you through" course, but a **real, thorough, complete training.** Auto makers and U. S. Government endorse this school. It is training headquarters, the place for you to come. Go through the great auto plants, the largest and most modern plants in the entire world. Learn their methods first hand.

Learn in a Few Weeks—Start Now!

A thorough training in Detroit, at the "Michigan State," fattens your pay envelope if you are working for others, or puts more profit in business for yourself. **You can take a full Automotive Course in 12 Weeks, or our big Master Course in 30 weeks.** Or specialize in any of its money-making branches; you can be an Auto Electrician, a Battery Man, Welder or Machinist. Jobs for all these men are offered to us daily. **Free Course in Business,** Garage Management and Selling given to all our students. Classes always open. Plan now to come. Write today for Outline of Courses. A letter or post card will do, or use the coupon on the opposite page. **DO IT TODAY!**

Read What Factories Say:

PACKARD MOTOR CAR CO., DETROIT

"I do not believe you would make any mistake in attending this school if you wish to become thoroughly experienced in the automobile business."

BUICK MOTOR COMPANY

"We believe the MICHIGAN STATE AUTO SCHOOL, Detroit, would best meet your requirements, as its course in technical training is most thorough and complete in every detail."

THE STUDEBAKER CORPORATION OF AMERICA

"We do not know of a better automobile school than the MICHIGAN STATE."

HUDSON MOTOR CAR COMPANY

DETROIT, MICH., U.S.A.

"This school is thought very highly of by the automobile men of Detroit and is considered one of the best equipped and most efficient schools in the country. You will make no mistake in attending the M. S. A. S."

MICHIGAN STATE

307 Auto Building Detroit, Michigan

Copyrighted material

Look Good To You?

Spend Your Summer at Detroit

Where business is always good—where weather is always fine. Detroit's location in center of Great Lakes district gives it ideal climate. Get away from the burning sun into the cool breezes of Michigan. After school hours enjoy boat trips, swimming, fishing, sailing, canoeing on lakes and river. See Major League baseball—Ty Cobb, Babe Ruth, Collins, Speaker, Sisler, Walter Johnson,—all the stars. Spend a pleasant summer and **improve yourself** at the same time. We work hard but we have some good times too.

Good Positions Open Demand for trained men is greater than the supply. Although there are 18 million cars running, more new ones were made in 1 month this year than ever before in history. That means trained repair men **must be secured** and they are paid big money. Come now and learn!

Earn While You Learn If you haven't the money to pay your way, we help get you a job. Ask about this plan.

Free Course Garage Management Taught by Packard Service Manager. This alone is worth $100.00. Free to all summer students.

Practice On Fine New Cars Here you learn on up-to-date new cars, four wheel brakes and other new equipment. Packard Eight, Buick, Oakland, Hupp, Reo, Oldsmobile, Hudson, many others.

700 Students From Every Part of the World Here Now In every corner of the world men know of the opportunities in the auto business. They know Detroit and the millions of cars made here. And they know the "Michigan State," whose successful graduates are everywhere. Come and be one of the successful.

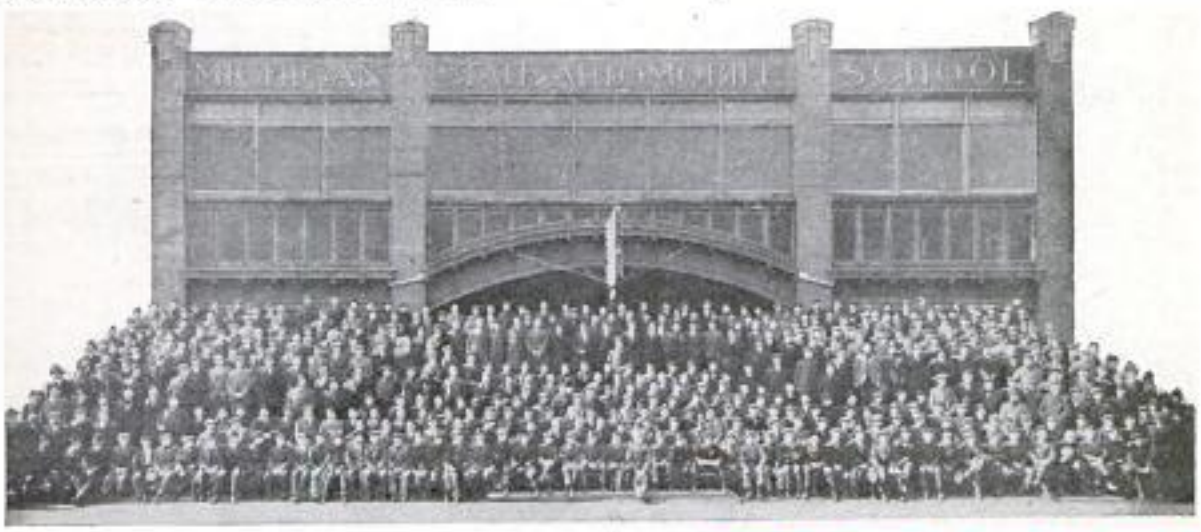

YOU CAN START ANY DAY

Or if you can't come at once you can begin to learn at home by my new Home Study method, then come here later to finish. **No extra charge** for the Home Study training. Get all the interesting facts. This coupon will bring immediate information. Or write a letter, explaining your circumstances, and ask any questions you wish. Write today. (Colored students not enrolled)

A. G. ZELLER, President.

AUTOMOBILE SCHOOL

3729 Woodward Avenue, Detroit, Michigan

Mail Coupon To Day

Michigan State Automobile School 307 Auto Building DETROIT, MICH.

Send me FREE and without obligation complete information about Detroit-training to make the most money.

Name.....

Street or R. F. D.....

City..... State.....

I am interested in ☐ 12 Weeks' Auto Course.
☐ 30 Weeks' Master Course.
☐ Home Study Course.

Copyrighted material

$4000 TO $10,000 A YEAR STEADY INCOME TO the Right Man

WANTED! A graduate salesman for your territory; a man who has been through the mill, who knows the formula for success in selling, and is ready now for the "big" proposition of his lifetime—**his final, permanent connection!** If you are this man, write us at once for particulars of the

New and Different SALES PLAN

which will give you a real business, a real job, a sure, steady, always increasing income of $4000 to $10,000 a year, and an association with an old established, financially independent manufacturer of higher grade tires.

BEARCAT CORD

—The Most Popular Tire in Chicago

The instant you see a Bearcat Cord (the tire with 2 extra plies), you will understand why 11,000 of the more expensive cars in Chicago are equipped with them. Bearcat is the distinctive, most attractive looking, obviously better quality, and longer wearing tire. It beats all competition wherever shown.

Get This FREE Book

Send at once for our big free book, "The Paved Road to Financial Independence," which tells all about Bearcat Cords and about the sales plan which is better than a drawing account, better than a salary, and better than any straight commission proposition ever devised.

WRITE TODAY so as to be sure of the territory you want. No form letter replies. Write us at once.

Send for Free Book

SIMPLEX TIRE & RUBBER CO. 2035 S. Michigan Ave. Dept. 14 CHICAGO

Learn How to BOX

JIMMY DEFOREST
World's Greatest Trainer Will Teach You BY MAIL

In 20 weeks I will teach you all there is to know about boxing—just what I taught Jack Dempsey and a host of other champions and great contenders. Every six months I select champions in all weight classes from my pupils. I train them at my own expense at my Long Branch, N. J., camp. Then TEX RICKARD, greatest of all promoters, stages them in bouts in his new Madison Square Garden at New York. Send today for my big FREE book, "The Golden Age of Boxing." Enclose 10 cents to cover cost of mailing. You've never before seen a book like this! Profusely illustrated with photos of great fighters and fully describes my course and FREE OFFER. There's fame and fortune waiting for you if you become a good boxer. Get my book and read all about it.

JIMMY DEFOREST, Box 617
347 Madison Ave., New York City

BECOME A RAILWAY POSTAL CLERK

Pay recently raised from $1850 to $2600 a year. Steady job. Pleasant work. Common education sufficient. No "pull" necessary. Mail coupon for FREE Catalog.

Patterson Civil Service School
Dept. 87 ROCHESTER, N. Y.

SIRS: Send me without charge your Catalog, describing this and other U. S. Government positions.

Name .....

Address .....

Patterson Civil Service School
Dept. 387
Rochester, N. Y.

$500.00 IN ONE MONTH DRAWING

Careful, conscientious training by members of our faculty enables our graduates to earn up to $500 in a month. The present splendid opportunities in the illustrating field have never been excelled. Publishers and commercial organizations everywhere are in constant need of artists. If you like to draw, let your talent make your fortune. Develop it. It takes practise but so does anything worth while.

The Federal Course Is a Proven Result Getter

The Federal Authors include such nationally known artists as Neysa McMein, Norman Rockwell, Charles Livingston Bull, Clare Briggs, Fontaine Fox, Sidney Smith, and fifty others. Exclusive, original lessons and drawings especially prepared by these famous artists are included in the Federal Home Study Course. No previous training is needed. Every step is clear and simple. Students get personal instruction and help, originality is encouraged and every aid is offered for the achievement of final success.

Free, illustrated catalog on request. Shows work of students and testimonial letters. Complete outline of course with all the details. Just write your name and address in the margin and send it to us.

Federal School of Illustrating

713 Federal School Bldg. Minneapolis, Minn.

Practical Electrical Education

Learn by the thorough approved scientific methods which our twenty years of specializing enable us to give you.

Become a **Commercial Electrical Engineer or Electrotechnician in one year, or an Electrical Specialist in from three to six months. Light, Heat, Power, A. C. and D. C. Armature Winding, Automotive Electricity, Radio.** Courses are enrolled. Illustrated catalog FREE. Be sure to mention age and education.

SCHOOL OF ENGINEERING OF MILWAUKEE
Dept. PM.-725, 415-417 Marshall St., Milwaukee, Wis.

YOU CAN OIL PAINT

Amazing new method teaches men or women to earn after first lesson. OIL PAINT photos—portraits, landscapes or art subjects. Earn $15 to $50 and more a week. OIL PAINT OUTFIT GIVEN. Send now for free illustrated book. PICTORIAL ART STUDIOS, Inc., Dept. GA-23, 2731 No. Clark St., Chicago

New Discovery BUILDS HEALTH!

Decayed wastes cause untold human misery. Eliminate them with Vit-O-Net Electro-Magnetic Blanket. Gives you new life—new power. Amazing health discovery. Endorsed by hospitals and physicians. Successful for scores of ailments. *Write now for free health document. Representatives wanted.*

VIT-O-NET MFG. CO., Desk 575, 4105 Ravenswood Ave., Chicago

$1.00 BRINGS THIS RING
No References Needed
No Red Tape

Immediate Shipment

Only $1.00 down and $1.00 per week for this platinum finish—finest hand pierced Deelite Ring with

1 Ct. Blue White

Perfect cut stone of genuine diamond radiance and beauty. For a flawless diamond of this cut and size, you would pay elsewhere upward of $150. Our special price only $12—and 11 weeks to pay for this beautiful gem. Send for yours now. State whether lady's or gent's desired. Give finger size. Our guarantee protects you.

BO Deelite Co., 530 Broadway, New York

Copyrighted material

This Tenor Banjo FREE

I want to present you with one of these wonderful, delightful instruments. I want to help every music lover get in success. No musical knowledge is necessary. Learn in 30 minutes. My picture method shows you and you imitate. I start your popularity, success and fame by supplying you with a handsome instrument. Under my personal supervision you will be given the benefit of my 22 years' experience as director of Glee and Instrumental clubs of New York University. (My name is Harry S. Six.) I furnish photos of myself along with phonograph records, together with my printed and illustrated easy-to-read course. It is easy to learn. I guarantee to teach you.

DON'T SEND A SINGLE CENT

Just drop me a line—telling me you are interested in receiving full particulars, and to reserve one of my regular $18.00 full size professional gift banjos for you. Write now. Prof. HARRY S. SIX. NEW YORK ACADEMY OF MUSIC, Studio 1-A 212-5th Ave., New York

MAKE YOUR OWN MOVIES

With Baby Standard MOVIE CAMERA $37

Including 2 Magazines

Takes standard size pictures—25 foot reel. For camp, vacation, and fun around home. Earn money making news pictures of parades, events, accidents, etc. Pictures can be projected on wall or sheet. Movie film can be cut and shown as "stills" with the

Vicam Projector, $15

or projector can be attached to Camera for showing movies.

Write for Free Folder telling about this movie camera and projector. Distributors and Agents Wanted.

Vicam Photo Appliance Corporation
1224-A Belmont Ave., Philadelphia, Pa.

SAXOPHONE MUSIC Catalog FREE

Just out—complete catalog of latest jazz hits, also standard saxophone solos, duets, trios, quartettes—2000 selections. Largest general dealers of saxophone music and supplies in the world. *Expert repairing.* Send for free catalog today.

FINDER & URBANEK, Dept. 601-A, 1322 West Congress St., Chicago

Free SUIT OFFER By Our New Plan

Made to Order Now

Send No MONEY

To secure boosters for our unbeatable values, classy styles and perfect tailoring, we make this introductory *free* suit offer. Our new plan enables you to get one of our fine, made to order suits, in any style you like without spending money.

AGENTS WANTED Earn $9 to $18 DAILY Cash for you besides Free Suit for spare time showing our wonderful samples to neighbors and friends, we show you how, prices so low folks buy on sight, get cash and FREE SUIT. No experience needed. Biggest sample outfit, agents wholesale prices, real wool pieces, fashion styles, tape measure, simple directions. WRITE AT ONCE for FREE suit offer and Free sample outfit.

PROGRESS TAILORING CO., Dept. G-216, CHICAGO

An Easy Way to Learn PHARMACY AT HOME

Graduate pharmacists are always in demand. The work is interesting and pleasant and salaries are good. Many young men open drug stores of their own and become independent.

There's an easy way to learn pharmacy right in your own home in spare time, without losing a day or a dollar from your present work.

The International Correspondence Schools course in Pharmacy supplies the knowledge which it will be necessary for you to have in order that you may pass your State Board Examination.

Just mark and mail the coupon printed below to the International Correspondence Schools, Box 5519-E, Scranton, Pa., and full particulars about the Pharmacy Course or any other work of your choice will come speeding to you by return mail.

INTERNATIONAL CORRESPONDENCE SCHOOLS
Box 5519-E, Scranton, Penna.

Without cost or obligation, please send me full information about the subject before which I have marked an X in the list below:

TECHNICAL AND INDUSTRIAL COURSES

- ☐ PHARMACY
- ☐ Chemistry
- ☐ Automobile Work
- ☐ Navigation
- ☐ Agriculture and Poultry
- ☐ Mathematics
- ☐ Electrical Engineering
- ☐ Electrician
- ☐ Mechanical Engineer
- ☐ Mechanical Draftsman
- ☐ Machine Shop Practice
- ☐ Railroad Positions
- ☐ Civil Engineer
- ☐ Surveying and Mapping
- ☐ Mine Foreman or Engineer
- ☐ Steam Engineer
- ☐ Gas Engine Operating
- ☐ Wireless ☐ Airplane Engines
- ☐ Architect
- ☐ Contractor and Builder
- ☐ Architectural Draftsman
- ☐ Concrete Builder
- ☐ Structural Engineer
- ☐ Plumbing and Heating

BUSINESS TRAINING COURSES

- ☐ Business Management
- ☐ Industrial Management
- ☐ Personnel Organization
- ☐ Traffic Management
- ☐ Business Law
- ☐ Banking and Banking Law
- ☐ Accountancy (including C.P.A.)
- ☐ Nicholson Cost Accounting
- ☐ Bookkeeping
- ☐ Private Secretary
- ☐ Spanish ☐ French
- ☐ Salesmanship
- ☐ Advertising
- ☐ Better Letters
- ☐ Foreign Trade
- ☐ Stenography and Typing
- ☐ Business English
- ☐ Civil Service
- ☐ Railway Mail Clerk
- ☐ Common School Subjects
- ☐ High School Subjects
- ☐ Illustrating ☐ Cartooning

Name.....
Street
Address.....
City..... State.....
Occupation.....

Persons residing in Canada should send this coupon to the International Correspondence Schools Canadian, Limited, Montreal, Canada

Copyrighted material

A new Parks!

Cabinet Shop Special No. 7

$250

as illustrated with motor

The Most Popular Machine Parks Ever Built!

A winner from the start. A real machine, yet convenient size for the small shop. Does everything in woodworking. Has circular rip and cut-off saw, 6 inch jointer, 16 inch bandsaw. Lathe and shaper attached if desired at small cost. Operates from any light socket. Just plug in and go to work! Write for interesting circular.

The Parks Ball Bearing Machine Co.
1500-1540 Knowlton Street, Cincinnati, Ohio
Canadian Factory: 200 Notre Dame East, Montreal, Can.

PARKS
WOODWORKING MACHINES

TELEGRAPH—RADIO

$18 to $35 a week while training for Radio and Telegraph Operator jobs at $150 to $300 per month. Write for particulars.

CHICAGO TELEGRAPH INSTITUTE
Dept. 901 1338 S. Michigan Avenue, CHICAGO

$2 DOWN

$3 A MONTH

7 DIAMONDS SET IN SOLID PLATINUM

This great big cluster of **best quality genuine blue white diamonds** is set in solid platinum in this solid gold ring. Diamonds flash and sparkle with all the colors of the rainbow. Looks like 1½ carat solitaire worth $600.00.

FREE TRIAL **NO RED TAPE**

SEND NO MONEY Pay only $2.00 to postman after you get this ring. If you keep it, pay **only $3.00 a month for 12 months.** If you return it within 10 days we will return your money—every cent.

PRICE CUT TO $38: WORTH $60

You now can buy this gorgeous ring at the wholesale price. Compare it with similar rings at $60.00. **We guarantee it to stand any test or comparison.** It is the greatest bargain ever offered by any Diamond Importer. We will give you 8% more than you paid for it when you exchange for a larger diamond ring.

FREE Every customer who answers this advertisement will get **a $7.50 value premium as a gift** from us. Thousands of bargains shown in this very interesting book. **Write for Catalog**

STERLING DIAMOND & WATCH CO., INC.
(Diamond Importers—$1,000,000 Stock—Established 1879)
63 Park Row Dept. 1974 New York, N. Y.

Hawaiian Guitar FREE to Students

This Hawaiian Guitar expert and professor, wants the opportunity to welcome you as a student, so you will quickly learn how to play the Hawaiian Guitar—so you will be able to play just like the native Hawaiians. To get you started and help you towards your musical success which will bring you popularity, you will receive a beautiful Hawaiian Guitar the same as the one pictured here **free,** when you enroll. Our short cut method of instruction will enable you to play a piece almost from the first lesson. We do not only furnish you with easy-to-understand printed lessons, but we also furnish **pictures, phonograph records** and **charts.** You will play a piece almost from the first lesson. It is easy to learn. **We guarantee to teach you.**

Don't Send a Single Cent Just drop a line—telling you are interested in receiving full particulars, and to reserve one of our regular $18.00 gift Hawaiian Guitars for you. Supply is limited. Write now.

Hawaiian Studio No. 52-A, of New York Academy of Music, 100 Fifth Avenue, New York

I Made $100,000
in less than five years as a
REAL ESTATE SPECIALIST

Started during my spare time, with no experience and less than $5 capital. If you want to learn the secret of my success and follow my money-making method, send your name and address at once to American Business Builders, Inc., Dept. A447, 18 East 18th Street, New York.

Use Your FORD

Put on in a few minutes

—To make $50.00, $75.00, $100.00 weekly this summer demonstrating and selling to Ford owners the—

Miami Pump



Stops overheating on even hottest days. Makes motor run smoother and pull better. Cuts down repair costs. Saves lubricating oil. Prevents freezing in winter. A year 'round necessity.

Quick Sales and Extra Big Profits

made easily. Record sales during summer months. No sales experience necessary. Get our proposition now—nothing to match it anywhere. Exclusive territory to real producers. Write today.

Jenkins Vulcan Spring Co., 514 N. 8th St., Richmond, Ind.

Here's Your Own 6 Foot

Steel Pocket Tape with your own initials stamped on it

In extra fine nickel plated case; spring wind, center stop. Tape ¼" wide; 6 ft. long; clearly marked. For architects, draftsmen, mechanics, business men, and for many household uses.

Send your initials with order, and tape will be sent C. O. D.

YOU PAY THE POSTMAN $1.12 which includes postal fee.

Returnable for full refund if not satisfied.

An AMERICAN RULE Product

AMERICAN RULE MFG. CO.
486 Johnson Ave., Brooklyn, N.Y.

Copyrighted material

Be an Electrical Expert!

You Can Learn to Boss Big Jobs Like This!

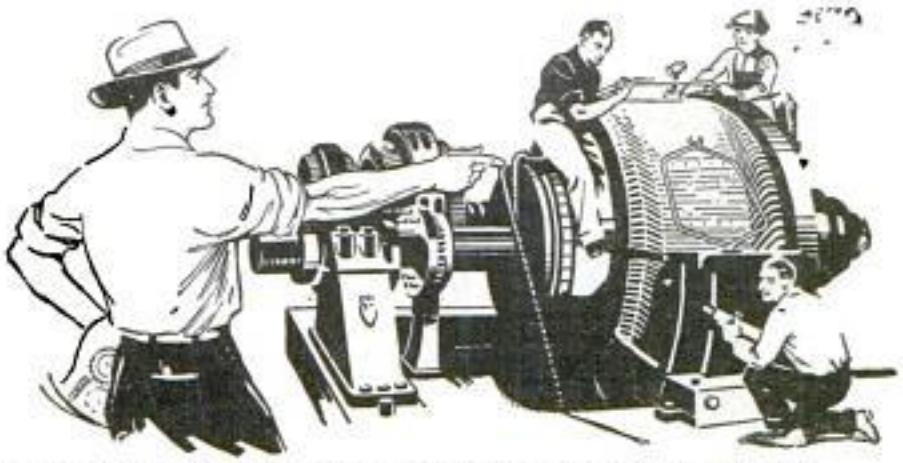

Thousands of Cooke-trained Men Earn

$3,500 to $10,000 a Year

Electricity is the big-pay field. Big business is crying for trained Electrical men—practical men trained as I train them. If you want proof—just mail the coupon. I don't care if you can't tell a motor from a gas engine. It isn't necessary. In just a few short months I'll have you thoroughly trained to get a **big** job—with **big** pay—in the fastest growing profession in the world. I'll do it easily, quickly, **surely! I know**—because thousands of my boys are holding big jobs right now—jobs that I helped them get. Send coupon for proof.

I Train You at Home

You don't have to give up your present job. Study right at home. With my simplified, easy methods you can learn at home just as if I was standing alongside of you explaining each lesson in plain, simple words. Not all theory—but **practical** work right in your own home! You can't believe how easy it is—but send the coupon and I'll **prove** it!

No College or High School Training Needed

You don't have to be a brilliant, highly-educated sort of a fellow to get ahead in this big-pay field. Why, man alive, many of the young fellows I've trained never even got through grammar school! But I made **big** men of them! They're making real money now.

Men No Better Than You Are Making $3,500 to $10,000 a Year as Cooke Trained Men

Wake up! How long are you going to just "pike" along on a small salary? I tell you that **you don't have to!** You've got just as much ability as the next man. Why, just read at the left about what other fellows are doing. I can help you to do it, too—if you give me a chance. Send the coupon today. I'll tell you about a lot of others who have made good in a **big** way starting only with my training.

L. L. COOKE, Chief Engineer

Chicago Engineering Works

Dept. 1-B, 2150 Lawrence Ave., Chicago

Cooke Training Complete

I train you *completely* in every branch of Electricity—including Radio and Automobile—and in a simple, easy-to-learn way. Before you realize it—you're ready to step out and take over a **big** job in this marvelous, interesting field.

Free Electrical Work Outfit

I give you an Electrical Work Outfit **free.** I do this because I want **my** boys to get sound, practical experience right at home. I do it because I want my boys to be big successes. I want them to be a **credit** to my training, so I give them a complete outfit of tools and apparatus. Send the coupon for a complete description of this big **free** work outfit.

You Don't Risk a Cent

I *know* that I can make a big pay man of **you** just as I have with the rest of my boys. Send the coupon and I'll **prove** it. I'll send you a sample lesson—to show you how easy it is—and I'll send you my big free book full of interesting facts. I'll show you how my employment department works with my students to help them into good paying positions. If you are dissatisfied—**I'll refund your tuition on your own say-so.** That's fair, isn't it? Then send the coupon.

Send Coupon NOW

L. L. COOKE,
Chief Engineer,
Chicago Engineering Works, Dept. 1-B
2150 Lawrence Avenue, Chicago, Ill.

Without obligating me in any way, send me your Free Book. Sample Lessons and particulars of your Free Outfit Offer. Free Employment Service, and proof that you can fit me for a big-pay electrical job.

NAME .....

ADDRESS .....

OCCUPATION .....

These Men Learned at Home In Spare Time

20 Years Old—Makes Almost $500 a Month

Harold Hastings of Somers, Mass., says: "The profit on my electrical business amounts to $475 a month. My success is due entirely to your instruction. You make your men just what you say—Electrical Experts. No man will ever make a mistake enrolling for your course."

Makes $750 in Spare Time Work

Before completing course, John J. Burke, 3532 East Baltimore Street, Baltimore, Md., made $750 doing odd electrical jobs in spare time. Now runs his own Electrical business.

$20.00 a Day for Schreck

"Use my name as a reference and depend on me as a booster. The biggest thing I ever did was answer your advertisement. I am averaging better than $500 a month from my own business now. I used to make $18.00 a week."

A. Schreck,
Phoenix, Ariz.

The "COOKE" Trained Man is the "BIG PAY" Man Send Coupon

Copyrighted material

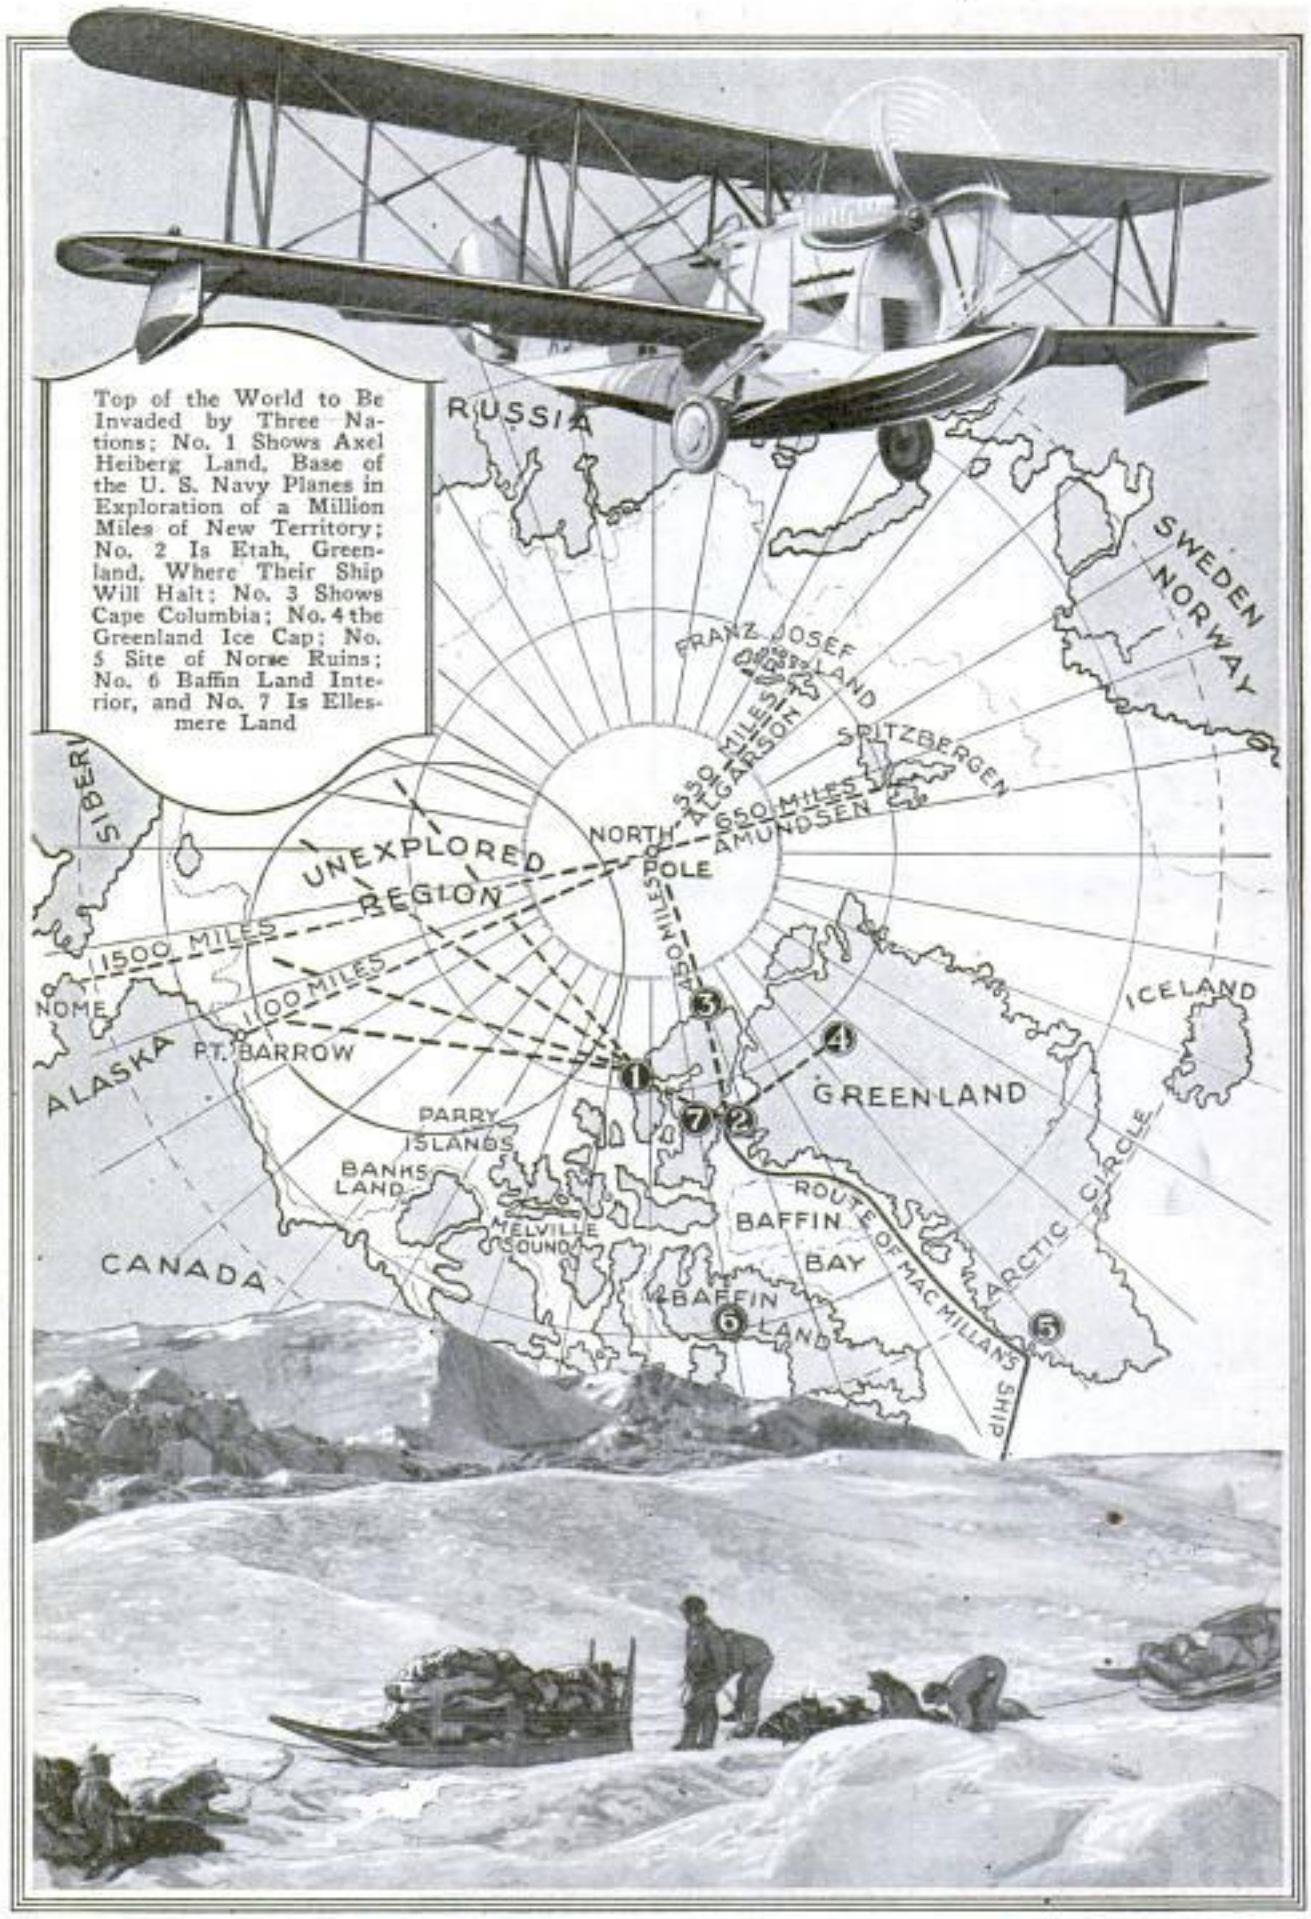

Navy's Amphibian Plane in Flight as It Will Appear to the Eskimos of the Arctic; Map Shows Route to Be Followed by Amundsen and Algarson in Their Dashes for the Pole—See Page 7

Copyrighted material

3230.

Popular Mechanics Magazine

REGISTERED IN U. S. PATENT OFFICE

WRITTEN SO YOU CAN UNDERSTAND IT

Vol. 44 · JULY, 1925 · No. 1

First Transpacific Radio Picture Sent from Honolulu to New York

Radio Photos Sent Five Thousand Miles

SUCCESSFUL transmission of photographs, by radio, from Honolulu to New York, a distance of five thousand miles, was accomplished during the army-navy war game maneuvers. While pictures had been transmitted between New York and London, the distance covered was not much more than half that bridged in the long aerial jump from the middle of the Pacific ocean clear across the United States. Likewise four relays were used in the Hawaiian stunt, the radio photographs passing automatically from one station to the next without human assistance. The transmitting equipment was stationed in Honolulu, twenty-nine miles from the broadcasting towers at Kahuka, while the receiving equipment in New York was seventy-six miles from the wireless station out at Riverhead, Long Island. From Honolulu the picture, translated by a beam of light into a series of electrical impulses, passed over land wires to the Kahuka wireless station, where a relay put the electrical current on the air, to be picked up at Marshall, Calif., 2,372 miles away. From Marshall receiving station, the wireless impulses, transmitted through a relay to a land wire, were telegraphed down to the high-powered broadcasting station at Bolinas, where another relay started the picture on its way again for the 2,640-mile jump to Riverhead. A final relay at the Long Island receiving station put the impulses back on another land wire for transmission to the radio offices in New York City.

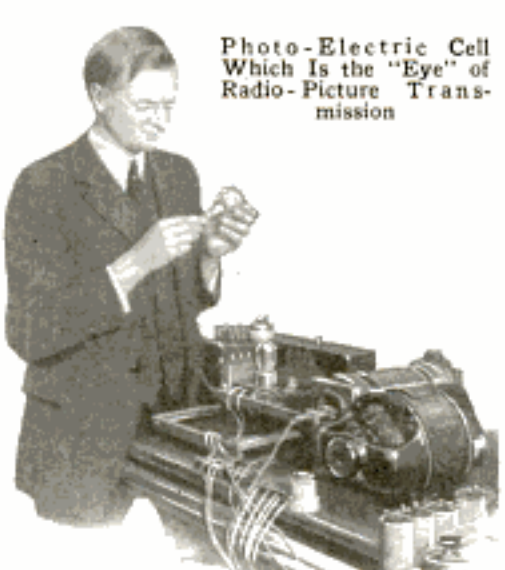

Photo-Electric Cell Which Is the "Eye" of Radio-Picture Transmission

The actual elapsed time from the instant

Copyrighted material

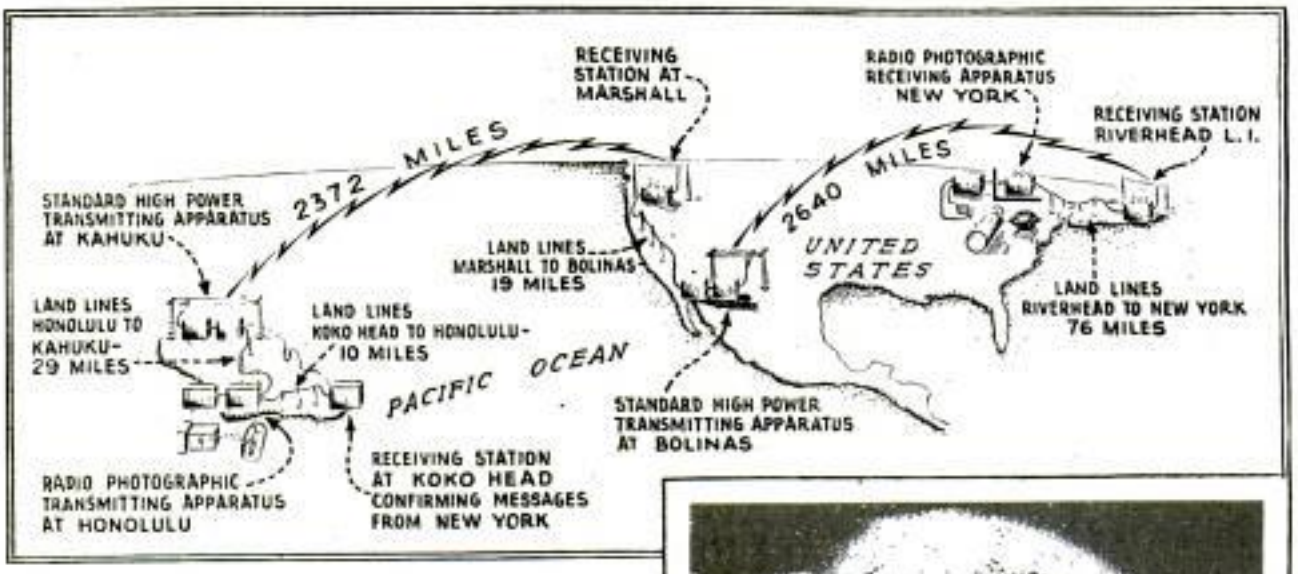

Picture Sent by Radio, and Map of Its Route through the Ether Waves

the transmitting machine started in Honolulu until the first impulse reached the recording pen in New York was less than one-fourth of a second, and in twenty minutes the first picture was complete. Seven photographs were sent in one morning without difficulty.

The system used employs a cylinder on which the film of the picture to be transmitted is wrapped. As the film revolves on the cylinder a tiny beam of light passes through it to a delicate photo-electric, or light sensitive cell, the amount of light reaching the cell depending upon the darkness or lightness of each section of the film. The light striking the delicate cell is converted into an electrical impulse, which is then relayed to the wireless transmitter for broadcasting.

At the receiving end a reversal of the process may be used to throw a tiny light beam on a photographic film to reproduce the original negative, or the electrical impulses may be sent through a pen arrangement which produces dots and lines to form a positive of the picture negative at the other end. The latter process was used to produce the illustrations appearing with this article.

The heart of the various forms of picture-transmitting apparatus, whether by radio or telephone wire, is the light sensitive cell. In this any variation in the light striking it is recorded by a corresponding difference in the amount of electrical energy which passes from the cell, just as sound in the telephone transmitter causes the diaphragm to vibrate, resulting in fluctuations in the amount of current passing through the wire.

At the receiving end the impulses are translated back into light in the same way that the telephoned impulses vibrate the telephone-receiver diaphragm and translate electricity back into sound. The greatest difference in the two processes is the use of the light sensitive cell.

AIRSHIPS TO HAVE TWO DECKS

Two separate decks and accommodations for 100 passengers are features promised in a giant airship of stainless-steel framework that is planned for traffic between England and India. Its motors are to use a heavy gas oil, eliminating the fire hazard to such an extent that passengers will be permitted to smoke during the voyage. A smoking room is included in the plans. The ship will be 720 feet long, 140 feet in diameter and will contain two-bed sleeping cabins.

HORSEPOWER FOR EACH PERSON EQUALS FORTY-EIGHT SLAVES

Every man, woman and child in the United States has six horsepower, or the equivalent of forty-eight slaves, to draw water, furnish light, carry messages and perform many other services for his comfort and necessity, according to C. F. Kettering, president of the General Motors Research corporation. This estimate is based on the assumption that the average work capacity of a human being is one-eighth horsepower and the total mechanical horsepower developed in this country is 700,000,000. Egypt, Rome and Greece enjoyed their highest progress when they had the largest number of slaves, Mr. Kettering points out, and, although human slavery has been abolished here, development continues because there is constantly more efficient conversion of materials in the earth's crust into useful articles. By our standards a Chinese coolie, who works for ten cents a day, is paid twenty times what he is worth, because he can only move one ton one mile in a day, while the railroads in America move one ton one mile for half a cent, illustrating the difference between man and mechanical power.

HEADLIGHT DIMMER ON WHEEL INCREASES AUTO SAFETY

Steering wheel and auto-headlight dimmer have been combined to simplify the driver's task and to increase the safety of operating the car at night. Without removing his hands from the control, the chauffeur can dim the lights simply by pressing a small switch that is fitted into a grip within convenient reach. The wheel is of the oversize type and can be attached, very easily, in a few minutes.

"EAR" DETECTS HUM OF PLANE TEN MILES AWAY

Sensitive airplane detectors that can catch the hum of a motor ten miles away have been tested at Fort Totten, N. Y., with other anti-aircraft equipment. The instrument consists of four long horns, like those of loud speakers, connected to helmets that slip over the ears of the observers, and has a locating mechanism to turn it in the direction of an approaching plane. Having once picked up the ship, the task of getting the range with spyglasses and guns is simplified, as the detectors warn of the plane's approach long before it is visible.

Locating Distant Plane by the Hum of Its Motors in Sensitive Detectors That Register the Sounds Ten Miles Away

WATER IS SWEETENED WITH AIR TO PREVENT DISEASE

New York city's water supply is carried through pipes for such a great distance that it is necessary to sweeten it with air and sunshine to guard against contamination. This is done in huge aeration plants where the water is ejected through perforated pipes. High, open country amid flowering fields is chosen as the place for the process, and the area is fenced in to prevent foreign matter falling into the water. A mist hangs over the falling jets usually, and on sunny days, rainbows are plainly visible in the spray.

Copyrighted material

Big Bills from Mother Nature

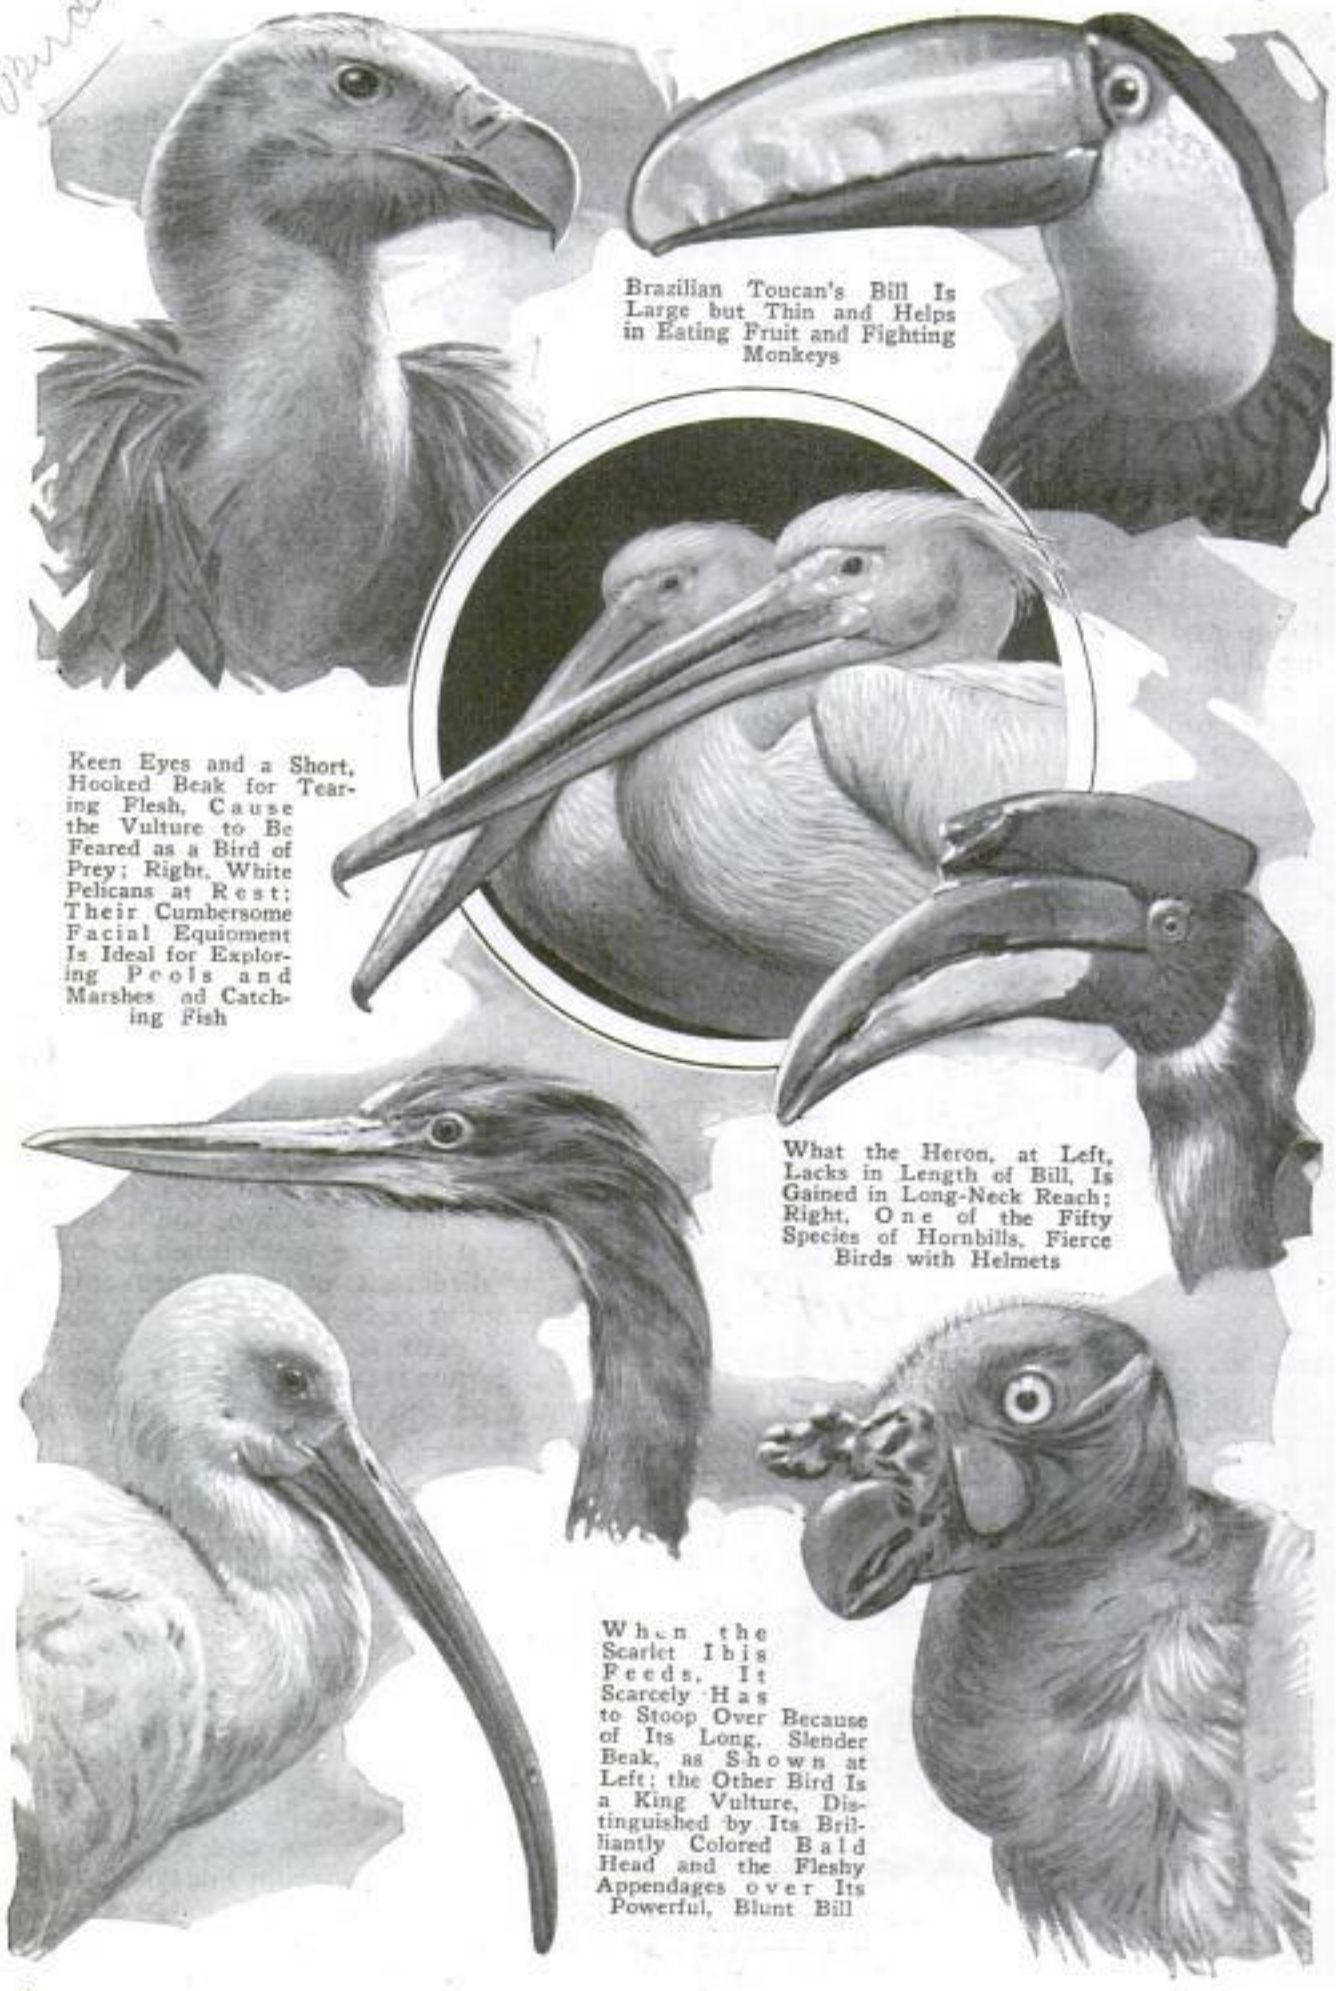

Brazilian Toucan's Bill Is Large but Thin and Helps in Eating Fruit and Fighting Monkeys

Keen Eyes and a Short, Hooked Beak for Tearing Flesh, Cause the Vulture to Be Feared as a Bird of Prey; Right, White Pelicans at Rest; Their Cumbersome Facial Equipment Is Ideal for Exploring Pools and Marshes ad Catching Fish

What the Heron, at Left, Lacks in Length of Bill, Is Gained in Long-Neck Reach; Right, One of the Fifty Species of Hornbills, Fierce Birds with Helmets

When the Scarlet Ibis Feeds, It Scarcely Has to Stoop Over Because of Its Long, Slender Beak, as Shown at Left; the Other Bird Is a King Vulture, Distinguished by Its Brilliantly Colored Bald Head and the Fleshy Appendages over Its Powerful, Blunt Bill

Copyrighted material

Miller. French product.

SCRAMBLING THE RADIO WAVES TO BEAT STATIC

3244.

Scrambling the waves from all the European radio stations into one mess in order to get away from atmospheric interference seems like an unusual way of making radio clearer, but is actually used by the great transatlantic receiving stations at Riverhead, L. I., and Belfast, Me. The big wireless station on Long Island was designed to eliminate static interference, and does, but a thunderstorm in its immediate vicinity causes all kinds of trouble. Constant and uninterrupted communication with Europe was necessary, because all the foreign signals are picked up by the one big antenna and sorted out in a battery of receiving sets, each one tuned to a different station. To get around the thundershower trouble, a second receiving station with ten miles of aerial was erected at Belfast, Me., on the theory that when there was a storm on Long Island there probably would not be one in Maine, and vice versa. The Maine station picks up the same European signals, but instead of transmitting them to receivers, the entire lot is shot into one short-wave transmitter, which sends out the scrambled mess to be picked up by a special short-wave receiver at the Long Island plant, unscrambled into their proper long-wave signals and passed to the battery of receivers.

3042

FOLDING PIPE FITS VEST POCKET AND HAS SAFETY COVER

For the convenience of smokers who prefer a pipe, one which folds up into compact form, and shaped to fit the vest pocket is being manufactured. It serves as a handy article for either indoor or outdoor smoking, since it cannot spill, and the contents are prevented from being blown about by the wind. A perforated top for closing the bowl after filling protects the clothing from injury should the pipe be placed in a pocket while burning. Its small size when collapsed also eliminates wear and tear on pocket linings often caused by ordinary pipes.

Price - $1.00.

Pipe Folded into Case and Extended

L. H. Stern & Inc.
56 Pearl St Brooklyn, N.Y.

VANITY BOX IN PARASOL GRIP SAVES CARRYING CASE

3164

Trouble of carrying the vanity case as a separate article is avoided with a parasol of French design. In its handle, it has a small compartment for powder, puff and other accessories, and a round mirror at the end of the grip. The glass is protected, when not in use, by a sliding lid.

Copyright, Kadel & Herbert

Demonstrating Parasol-Handle Vanity Case; the Mirror with Protecting Cover Is at 2nd

EYEGLASSES RESIST GUN FIRE WITHOUT SPLINTERING

3185

Splinter-proof glass for spectacles was tested with hammers and shotgun bullets during a London demonstration to prove its strength. Lenses of the material were fired at from a distance of thirty yards but no shot penetrated them and no chips were broken off. It is said that the glass can be ground to any curvature required for the eyes. It is intended chiefly to meet the needs of football players and other sportsmen who run the risk of serious injury in wearing ordinary glasses while participating in games. This is the first time such glass has been made into lenses.

Virginia inventions no information

Copyrighted material

DRINK OF ULTRA-VIOLET LIGHT AIDS THROAT TREATMENT

Treatment of certain throat diseases is given at a London hospital with a special ultra-violet light apparatus. It has a long funnel-shaped tube, the small end of which the patient puts in his mouth. The rays are directed through it so that they fall upon the affected parts and little of their beneficial powers is lost.

Treating a Throat Ailment with Ultra-Violet Light Rays Projected Directly upon Affected Parts

OLDEST CHILD IN THE FAMILY MOST LIKELY TO SUCCEED

Studies made by Prof. William Ogburn, of Columbia university, indicate that the oldest child in the family most frequently succeeds in life, the youngest ranks next and intermediate children third. Three thousand names were selected at random for a survey: 1,000 artists, including doctors, musicians, authors and painters; 1,000 scientists of all grades, and 1,000 of a more general classification, including business men, journalists and men of "good mixing qualities." Questionnaires were sent to these individuals with the request that they indicate their position in the family. Replies were received from 1,700. Turning to "Who's Who" as a criterion of success, it was found that of the 577 who were the oldest sons in the family and had brothers less than five years younger, 342 appeared in the lists of noted men; 155 out of the 398 who were the youngest children with brothers five years older were in the book, but of the 729 who were intermediate children, only 237 could be found in it. These data were regarded important in measuring early influences.

BOILER BURNING OIL IN WATER ELIMINATES FLUE LOSSES

Another effort to produce a successful internal-combustion boiler, that is, one in which the fuel is burned directly in contact with the water, has been made by a Belgian engineer who asserts that his apparatus has worked continuously for months. Fuel oil and the air necessary for combustion are supplied to a burner under pressure slightly above that of the steam, and care is taken that the water level is not above the lower mouth of the burner. Ignition is first accomplished in a special lamp until a flame burns in the generator. A connecting valve to the reservoir is opened, and water allowed to rise to the middle of the burner. The flame continues to burn, converting the liquid into steam which can be superheated to any degree in a special unit. Although losses due to the presence of flues in the ordinary boiler are eliminated by this system, one of its drawbacks is the necessity of compressing all combustion air to more than full boiler pressure.

FOLDING HOLDER FOR GOLF BAG FITS AUTO RUNNING BOARD

Golf clubs are carried to the links in the auto with little trouble in a collapsible holder for the bag that fits on the running board and folds flat when not in use. It opens and closes like a jumping jack, may be installed as a permanent fixture, has four steel bands which hold the bag snugly without the need of straps and is finished in durable and attractive nickel.

Copyright Unmatched

3051 Wide World Photos 229 W 43rd St, New York.

Pacific & Atlantic Photos 25 Park Place New York

Three Nations in Air Race to Polar Lands

SEEKING to raise the American flag over a vast unknown continent, believed to be located northeast of Alaska, intrepid American scientists, accompanied by naval flyers with two amphibian planes, will invade the far north this summer on one of the best-organized polar expeditions in history.

Their ultimate destination is a million square miles of unexplored territory lying between northernmost Alaska and the pole, and in this region they hope to find the mysterious Arctic continent whose high shores the late Admiral Peary reported sighting, though open water kept him from adventuring farther.

With the two navy planes, capable of landing on either land, ice, or water, and with the pick of the navy flyers for pilots, the expedition, led by Donald MacMillan, hopes to make a photographic map of a large section of the far north, including not only the mystery area of a million square miles, but likewise the interior of Ellesmere and Baffin lands, and that part of the north Greenland ice cap never seen by white men. If they succeed the earth's unknown areas will have dwindled to two —a part of the frozen antarctic and a portion of the jungle fastness of interior South America.

While the Americans are preparing to leave Wiscasset, Me., two other expeditions will be racing for the pole from the opposite side, both using planes in the first polar air derby. One expedition, led by Capt. Roald Amundsen, established a base in northern Spitzbergen, 650 miles from the pole, early in April, landing there with two big twin-motored flying boats. The second expedition from the other side of the globe is to be led by Grettier Algarson, flying the English flag. He explored the territory north and east of Spitzbergen last summer, and is returning this year with a small blimp to attempt to reach the north pole from a base in the Franz Josef islands, north of Nova Zembla, and only 550 miles from the pole and 100 miles from Spitzbergen.

Donald B. MacMillan, Arctic Explorer, Who Leads Expedition to Seek Million Miles of New Land for U. S.

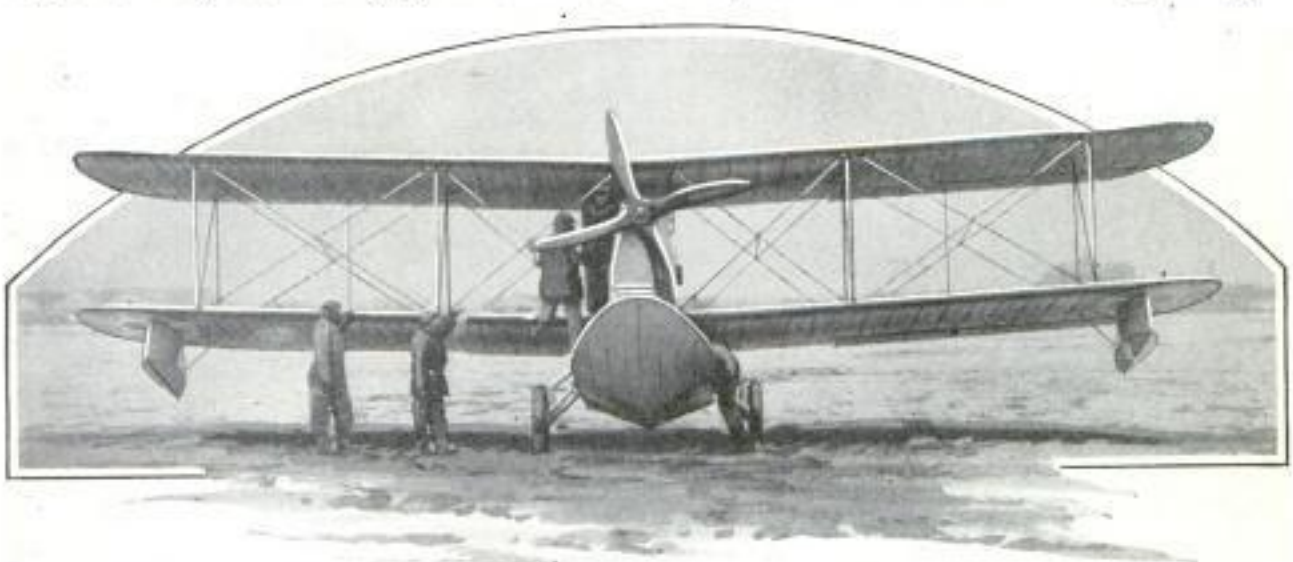

One of the Loening Amphibian Planes, Capable of Landing on Either Land or Water, Which Will Be Used by the Navy Flyers Accompanying the MacMillan Arctic Expedition

Copyrighted material

3051

The MacMillan expedition, under the American flag, unlike the other two, is not interested in the north pole, and will make no effort to reach it. "Admiral Peary has been there, and there is no object in our going back at this time," according to Lieut. Commander Byrd, who will command the navy flyers. Instead of entering the international air race to the top of the earth, the MacMillan expedition will devote itself to hunting the arctic continent as an addition to the lands under the Stars and Stripes, and to carrying out other scientific work.

Bound north along the coast of Labrador, MacMillan plans to stop and explore ancient Norse ruins which lie almost west of Greenland, and which are supposed to mark a settlement established on the American mainland about the year 1020 by Leif Erickson, the son of Eric the Red, and which, if true, antedates Columbus' discovery by more than four and a half centuries. From the Labrador ruins the party will sail across the straits to Greenland and stop to compare ancient ruins left by Eric the Red there, in an effort to prove the common origin and time of both. From there they will follow the retreating ice northward to Etah, an Eskimo settlement above Smith sound, and if possible will push on north into Kane basin. Regardless of which location is chosen for a base, the real work of the summer will start from there. To the east lies the northern Greenland ice cap, an age-old plateau of ice which no white man, and probably no native, has ever seen. The airplanes will be sent out to map the region with a camera and determine what lies behind the ice ramparts.

With the ice cap mapped, an aerial expedition will wing north to Cape Columbia, the jumping-off place at the northern tip of Grant land, from which Peary launched his successful trip to the pole. Here he left valuable records, and the flyers will open his rock cairn and copy the documents in order that they may help fill out the story of the pole discovery. At the same time it is possible that the flyers may find a trace at Cape Columbia of either Amundsen or Algarson, since both will make that point their objective in the event that anything prevents their returning to their ships. Both will carry food, sleds, skis, guns and ammunition, and if they are forced down near the pole, will head for the cape, which is only 450 miles from the pole, as

Eskimo Hunters, with Bow and Spears, Down a Huge Polar Bear, One of the Explorers' Food Sources

Copyrighted material

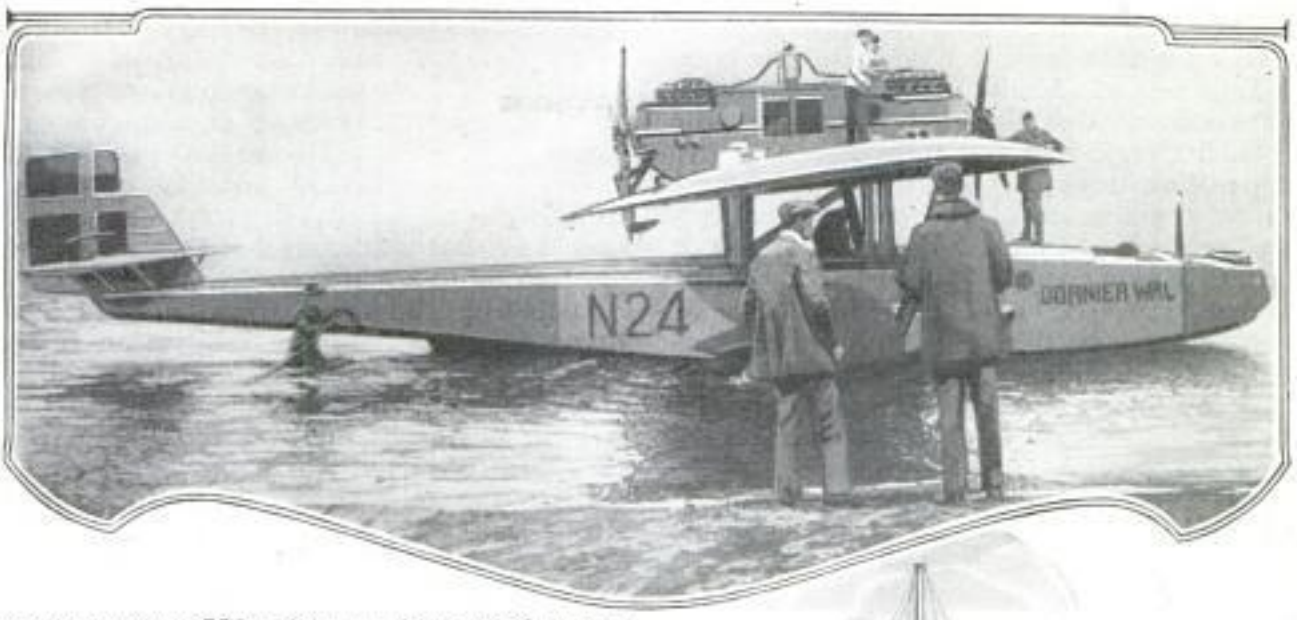

compared to 550 miles to Algarson's base and 650 to that of Amundsen.

After the Cape Columbia trip, the naval flyers will set to work to ferry MacMillan's supplies and the geologists and other experts to a base camp 250 miles northwest of Etah, on the northern shore of Axel Heiberg land. Flying back and forth, they will transport the camp equipment and scientific instruments to the base camp, and with that established, start out on the great adventure of the trip—the search for the supposed arctic continent. Belief in its existence is founded not only on Admiral Peary's report of sighting land in the distance, but on observations extending over more than forty years. Gen. A. W. Greely, dean of living explorers and commander of the ill-fated expedition of 1881-84, advanced the belief at that time that there was land in the unknown area, basing his claim on the peculiar structure of arctic icebergs, which could only have come from a flat land, quite unlike Greenland and the surrounding area.

While naval flyers, photographers, map makers, geologists, botanists and ornithologists are carrying on their scientific studies, an equally important investigation will be under way from Etah, where a study is to be made of the northern lights and the magnetic pole, and their effect on radio. MacMillan carried the first radio set into the far north on his earlier trip and kept the world informed of his progress through it, while the

One of Amundsen's Planes, Above, and the Ship Which Will Carry Algarson's English Expedition to the Far North in Polar Dash

Copyrighted material

radio brought news and entertainment, as well as a talk by his own sister to him.

Eugene F. MacDonald, of Chicago, president of the National Association of Broadcasters, is going to accompany the expedition together with operators and radio engineers and several transmitting and receiving sets, including a short-wave outfit. Radio experts believe that the short waves will overcome the difficulties of competing with the aurora and other electrical manifestations in the far north, and will reach America every day, despite the twenty-four hour daylight of the north. The messages received over the twenty-meter outfit will be stepped up and rebroadcast by several American stations, using their own wave lengths, so that the entire country may be able to listen in and hear Eskimo tribes singing their folk songs, as well as get daily reports on the expedition's progress. The planes are to be equipped with short-wave sets, and will be in constant communication with the base camp, so that if one comes to grief a relief party may speed to the rescue.

The Loening amphibian planes are capable of carrying three men and 350 pounds of equipment each, or two men, on the ferry trips, and a correspondingly larger amount of supplies. Pilots, mechanicians, riggers, navigators and photographers are included in the navy personnel of enlisted men and officers, all of whom volunteered for the hazardous duty. In addition to three men, each ship on exploration flights will have 100 pounds of radio equipment, 150 pounds of food, camping equipment, firearms, ammunition and harpoons, and 100 pounds of photographic apparatus.

Including the three naval officers and three enlisted men, the expedition is to number sixteen, in addition to a ship's crew of twenty-five, making it one of the largest, as well as the best-equipped party ever to invade the north.

Like the MacMillan expedition, the Amundsen party is elaborately equipped, and is supported by a meteorological station established in north Spitzbergen, to chart the weather, while a wireless plant at the same point will pick up special weather bulletins from Nome and Canadian points to help in selecting a favorable time for the flight.

The English expedition is the smallest of the three, and will take the greatest risks. In the hold of their ship they will carry a small blimp, built during the war for British coast-patrol duty, and with it 50,000 cubic feet of hydrogen gas, stored in tanks. Arrived at Franz Josef land, Algarson plans to fill the blimp, and, accompanied by two British naval officers, sail for the north pole. He hopes to reach the pole and return to the ship, but if winds or other causes prevent, will try to reach Cape Columbia.

Assembling the American Amphibian Plane, Showing How the Landing Wheels Are Arranged to Draw Up into the Boat Hull When the Ship Lands on the Water; the Sturdy Metal Fuselage Is Well Riveted Together

Copyrighted material

Vancouver 5/3/25 3211

3228

YEARLY FALL OF STAR DUST TWELVE THOUSAND TONS

Although the annual fall of star dust is estimated at 12,000 tons, this quantity is small in view of the large number of meteors that hourly plunge into the earth's atmosphere. Most of them are consumed by friction developing from their terrific velocity. Between thirty and sixty meteors are visible each hour in the whole night sky from a fixed position but as only those within a few hundred miles can be observed, the total probably is several millions daily. It is estimated that it would take a thousand million years to cover the earth with a layer of star dust one inch thick at the rate it now is falling. Dust that collects on shelves and cornices contains a small percentage of tiny particles from "shooting stars." Among the largest meteors recorded is the one which fell in Greenland and was taken to New York by Commander Peary. It weighed more than thirty-six tons.

RAINFALL AND FRUIT

3139

In cool, rainy seasons, apples and some other fruits are likely to ripen more slowly and evenly and therefore keep longer after picking, English growers maintain. Hot weather sometimes forces the development, producing less solid fruit. Tests with a box of three carefully selected varieties of apples not long ago, proved that they were able to withstand the ocean voyage from England to South Africa and back again, only one in the shipment being spoiled. Apples raised in Australia and New Zealand are being imported into England. If the fruit is in good condition when picked, with care it will keep for the greater part of the winter.

MOSQUITO UMBRELLA IS USED TO REPLACE SMUDGE POT

Protection against insect pests of the summer is provided by an umbrella topped with mosquito netting. The lower edge of the netting is hemmed and has an elastic band which holds the fabric tightly around the body under the user's arms. The screen is designed to replace smudge pots in mosquito-infested districts, and has the advantages of portability and simple adjustment.

Shroud of Netting over Umbrella with Elastic Band at Bottom to Keep Covering Tightly Closed against Insects

2514

LADLE HEATED BY ELECTRICITY KEEPS CONTENTS LIQUID

Heated by electricity supplied from any convenient wall socket through a cord, a pouring ladle has been devised for plumbers and other mechanics to keep solder and like materials in a liquid state. The heating unit is contained between the walls of the pot, the long stout handles afford a secure grip, and the spout of the ladle is so shaped that difficult places may be easily reached.

Pouring Ladle with Cord Connection in Handle for Insertion into Wall Socket

Chicago Evening Post 4/24/25

Copyrighted material

FLOATING ISLES TO FACILITATE TRANSATLANTIC AVIATION

Plans for the construction of floating islands in the Atlantic to facilitate aviation, have been presented to the Institute of France and have been awarded two prizes. American, British and German projects had been offered but did not solve practical difficulties. The French scheme calls for a reinforced concrete structure, heavily ballasted and shaped like the keel of a boat with an open bay between its wings upon which aircraft will alight. Motors would keep it hovering about the same point with its nose to the wind, to protect the sides from the waves. Workshops and supply rooms would occupy one wing and hotel rooms for passengers and a wireless station, the other. In the prow, hangars would be constructed to open on the basin. At night, powerful searchlights would direct their rays upward to guide the flyers. The unique port, as planned, will be 450 yards long, 250 yards wide and can be built at an estimated cost of about $13,000,000. It is proposed that four of the islands, equidistant from each other, be laid down between New York and Brest.

"SNOW" FROM COTTONWOODS PREVENTED BY ACID SPRAY

Spraying seed-bearing cottonwood trees with a two-per-cent sulphuric-acid solution has been found an effective way of preventing the showers of fluffy down that often prove a nuisance later in the year. The preparation can be applied with the usual equipment and at slight cost. Trees that require the treatment are distinguished from the others by their buds, which have small greenish clusters instead of the "red neckties" that grow on the male, or cottonless trees.

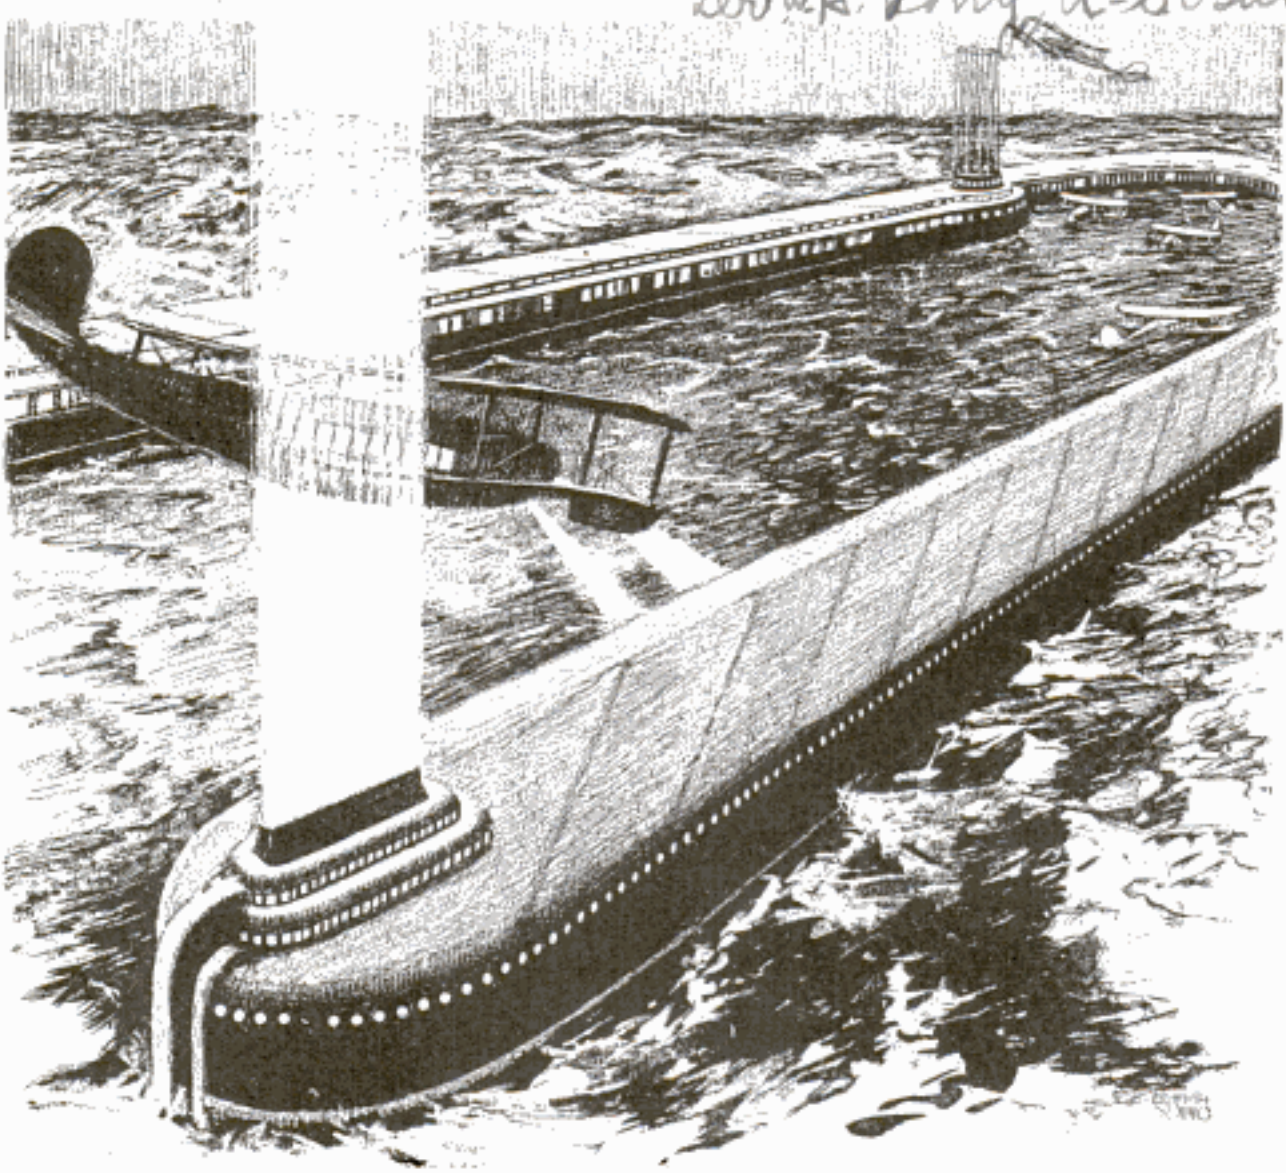

Drawing of Proposed Floating-Island Way Station for Transatlantic Airplanes; Searchlight-Bearing Wings Inclose Landing Bay and Contain Workshops, Repair Rooms and Wireless, besides Hotel Quarters

Copyrighted material

FLYING RISKS CUT BY SLOTS IN WINGS OF PLANE.

Inspecting One of the Wing Slots Shown Here in Closed Position in Front of the Aileron, the Sagging Flap at Right

Courtesy London Times

Ideas on what is possible in flying were revolutionized at Croydon, England, when a pilot caused his airplane to lose its flying speed at a low altitude. Aeronautical experts, gazing up into the sky, held their breath, expecting the machine to spin into an uncontrollable dive, and crash to earth. But the plane merely hung motionless in the sky for an instant. Next, the airman swung his craft round, with its nose up and its tail down, flew off, and, shortly after, made a perfectly safe landing. This mechanical wonder was achieved by the operation of the Handley-Page slotted-wing device, consisting of an adjustable slot, right through the planes, 18 inches behind the leading edge. When open, this slot increases the lift of the machine in the air and allows a smaller area to support a greater weight at a lesser speed. The wing-slot system, worked in conjunction with the balancing planes or ailerons, gives the pilot, it is claimed, six times as much control over his airplane as anyone has ever had previously. If the airplane "stalls" (loses its flying speed, which lifts it in the air), the pilot need not lose control. He can prevent his plane from spinning and crashing to the ground, and can keep it on an even keel, so that, if his machine sinks to the ground, all the injury he will sustain will be a damaged undercarriage, and no personal hurt. The wing slots are controlled by the movement of a single hand lever, and ailerons—hinged flaps at the rear of the plane, controlling it laterally—are made more efficient by a slot between the main plane and the aileron. This acts similarly to the front-wing slots. An English insurance company has given a rebate of one-third in rates charged on airplanes fitted with the new wing-slot device.

PEARLS FROM FISH SCALES

Artificial pearls that market for as much as $200 each are being manufactured from herring scales on the Massachusetts coast. Only experts are able to detect them from natural gems, it is said, and many of them possess rare beauty.

Copyrighted material

Copyright, Kadel & Herbert

Tuning In Radio Program While Driving Car with Set Attached to Instrument Board and Loud Speaker above Windshield

RADIO SET FOR MOTORIST FITS AUTO INSTRUMENT BOARD

A novel installation of a radio-receiving set has been made on the instrument board of a closed-type automobile, where it may be easily operated by the driver while speeding along the road. The control panel is neatly attached directly in front of the steering gear, and the mechanism of the set is hidden behind the instrument board, where it cannot interfere with the movements of the driver. Overhead and at the top of the windshield is the loud speaker. The unit is a five-tube outfit, receiving its power from the battery of the car. The aerial consists of sixty feet of antenna wire, carefully strung along the ceiling of the machine and concealed by a covering of cloth that matches the interior finish of the vehicle. No difficulty is experienced in tuning in while the car is running, and on long-distance trips the tourists may keep in constant touch with world events through stations broadcasting the news of the day.

SOME PLANTS OF PREY

Beasts and birds of prey are common but there are also ravenous plants that trap and devour flies and other insects. One of the most familiar of these is the pitcher plant of the tropics, which has hinged lids that can be closed over cavities containing a thick fluid. Attracted by the perfume and color, insects are drawn inside the prison, the lid shuts down, and the victims are slowly digested by the plant. Sundew, bladderwort and teasel, and the common butterwort of swamps in England, also trap prey. The first-named exudes a sticky fluid which entangles flies like fly paper. Tiny hairs slowly close over the victim and in two days there is nothing left but a pair of wings.

JACKKNIFE IN LETTER OPENER CONCEALED IN HANDLE

A combined letter opener and penknife which has an extra blade that folds into the handle forms a convenient tool for the writing desk or office mail table. The cutter is light and easy to manipulate and can be kept on a tray or pencil rack handy to the worker. The folding blade, which closes smoothly into the handle, may be used for sharpening pencils, erasing ink marks, and similar tasks where a keen edge is required. Ample space is provided on the grip for advertising matter or printed inscriptions.

Combined Jackknife and Letter Opener with Blade in Handle Raised to Show Position

Copyright Material

3075 National d nstitute of d ndustrial Psychology London, Eng

Mind Tests Help Students to Pick Careers

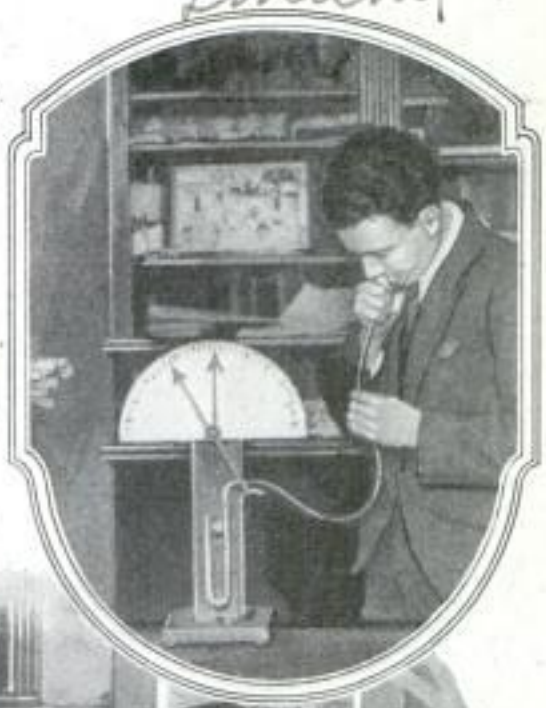

Setting Pegs in Shortest Possible Time and Checking Them on Meter Is a Test Given Prospective Engineers; Right, Measuring Sustained Blowing Effort

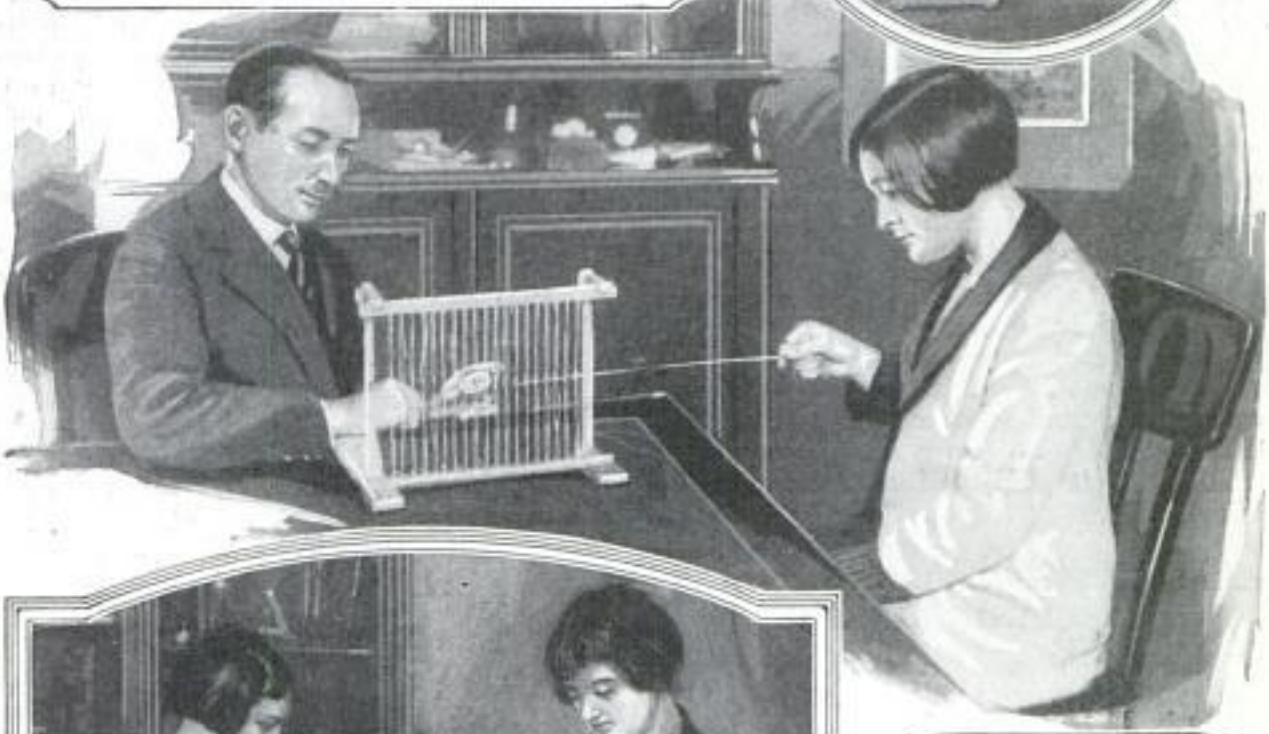

While Examiner Holds a Stop Watch, Candidate Pierces as Many Rings with a Long Needle as She Can in Allotted Time to Demonstrate Steadiness of Nerves and Strength of Wrist; Left, a Free-Arm Speed and Accuracy Test, Its Object Being to Take the Thimbles off the Forward Pegs and Place Them on the Rear Row Quickly and without Slips While the Instructor Keeps the Time Record

Copyright, Keystone View Co.

Copyrighted material

GASOLINE-DRIVEN STREET CAR TESTED IN NEW YORK

Gasoline as a substitute for electric power has been tested in a specially constructed street car on one of the lines in New York City, and the first experiments are said to have proved successful. Although the car is considerably shorter than the usual type, its engine is built so compactly that it does not greatly decrease the space for passengers, and its small size is expected to relieve traffic congestion.

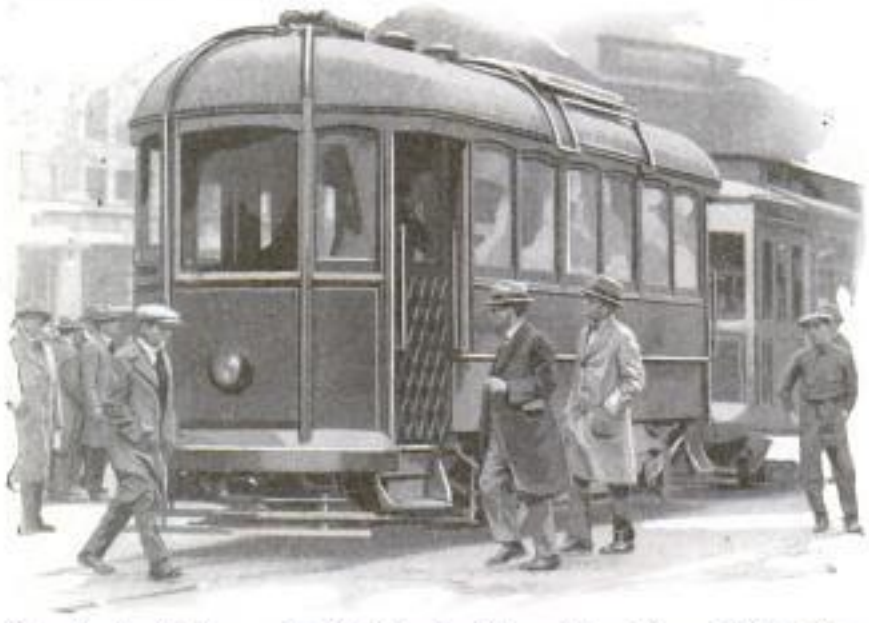

Pipes Replace Trolley on Roof of Gasoline-Driven Street Car, and Front Controller Has Given Way to Concealed Motor

RATE OF POPULATION INCREASE DECLINING IN U. S.

The population of continental United States on January 1 of this year was 114,311,000, according to estimates prepared by the national bureau of economic research. The survey reveals that the rate of increase is declining, the last year's gain, 1,627,000, being only 1.44 per cent as compared with 1,996,000 or 1.80 per cent increase for 1923. A growth of 1.42 per cent and 1.60 per cent was recorded for 1922 and 1921, respectively. Decreases in the birth and death rate and in the number of immigrants were noted, immigration accounting for only one-fifth of the population increase in 1924. It was also found that more persons are working for some one else than ever before. Only 9,657,000 were in business for themselves last year. Employes increased from 29,959,000 in 1920 to 33,566,000. It is estimated that the population of the country will be 148,700,000 by 1950.

ARTIFICIAL TIDE FROM SHIPS DISLODGES STRANDED BOAT

Artificial tide created by rapidly moving ships succeeded in dislodging a merchant steamer that had run aground near Chefoo, China, after the combined hauling efforts of two big tugs and four torpedo-boat destroyers, ordered to its assistance, had failed. The tugs, with towlines attached to the wreck, were secured in tandem and started away from the beach with the engines going at full speed. The four destroyers steamed some distance out to sea, then turned and dashed in at a speed of thirty knots. Sweeping as close to the stranded steamer as possible, they piled up an artificial tidal wave about four feet high, which was sufficient to lift the wreck clear of the beach so that it could be towed out to deeper water and safety.

SUSPENSION BED INSIDE AUTO FOLDS UP IN SMALL BAG

For the sedan or touring car, a folding suspension bed that can be set up or taken down in less than five minutes, fits into a cover not much larger than a golf bag when not in use, and weighs only thirty pounds. It rests on top of the seats, is partly braced to the steering wheel in front, and is adjustable to accommodate persons of different length or fit larger and smaller cars.

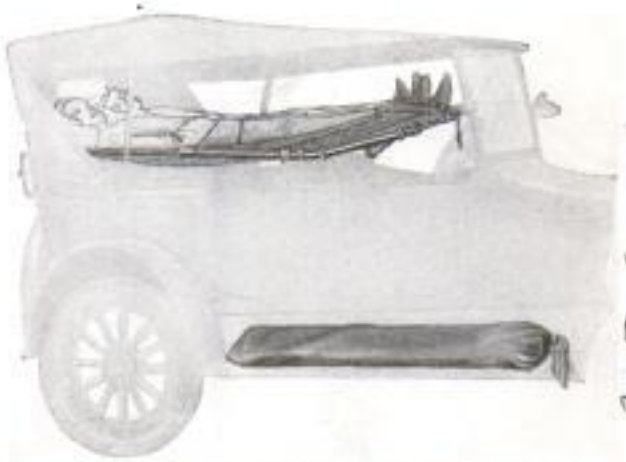

Auto Bed in Use, and Folded into Bag That Fits on Running Board

Third Avenue Railroad Co. New York City 3096 3153 Cent. R. R. Co. Irvington, N. J. Harry Yard, Chief Engineer 3107 Edwin H. Nichols Daily News 4/29/25 Alward-Anderson-Southard Co., Chicago 929 W. Chicago Ave.

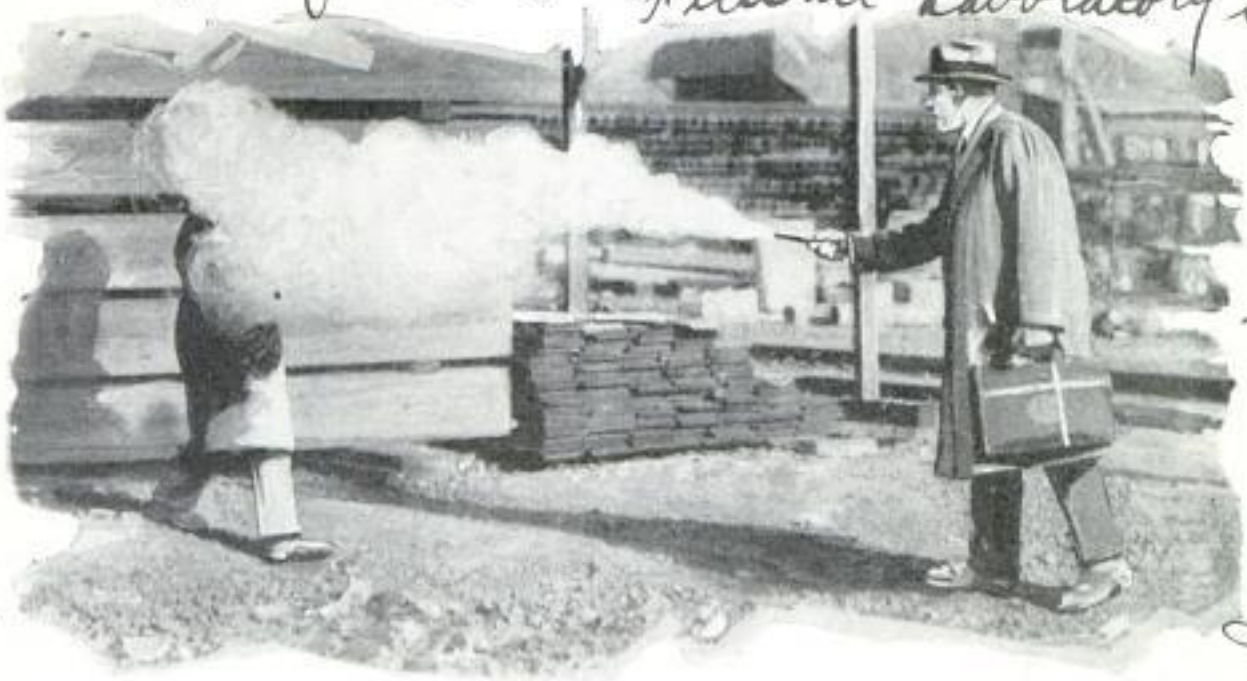

Demonstrating Operation of Tear-Gas Club on Actor Posing as Bandit; at Release of Button, a Blinding Cloud Streams Forth with Effective Range of Fifty Feet

CLUB FILLED WITH TEAR GAS TO ROUT BANDITS

Bank messengers and others likely to be attacked by bandits are afforded a protecting weapon in a short club filled with tear gas, which is released at the touch of a button. The vapor shoots out as a sudden cloud, and is said to temporarily blind anyone within fifty feet. The "billy" is small enough to be used at close range and can easily be concealed in the clothing.

PICTURE PUZZLES IN COIN BOOK TEACH CHILDREN THRIFT

A coin book which teaches children to be thrifty and provides amusement for the tots, consists of a puzzle-picture book with holes into which the money is inserted. As each coin is pressed into its place, a section of a picture is pasted over it. When the page of holes is entirely occupied with coins and covered with the patches, it presents a complete nursery picture. Suitable verses to encourage saving are printed on the pages opposite to those holding the money, making an attractive volume of illustrated rhymes as well as a valuable home bank. Space is also provided in which may be inserted advertising matter of banking institutions that may desire to distribute the books.

Coin Book Which Contains Picture Puzzles to Encourage Children to Save Their Money

PILLS THAT KILL CRAWFISH REDUCE CROP LOSSES

Crawfish are said to cause millions of dollars' worth of damage each year to crops on the rich prairie lands in the south, but a way has been found to stop their depredations by means of pills that produce a deadly gas when they strike water. The pellets are dropped into the holes that the pests burrow in the ground. The gas, which forms instantly, is said to kill every living thing it reaches. This remedy has been patented and given thorough tests in the past two years. It is heralded with great hopes, as the crawfish have proved immune to arsenic and other poisons tried before. The destructive creatures work at night, coming out of their holes and cutting the green growth for a radius of several feet. They are found in greatest abundance on the richest lands and sometimes burrow to a depth of twenty feet or more into the ground.

Copyrighted material

Homes for Lean Purses

By H. H. WINDSOR, Jr.

PLANS for small homes of good construction and excellent design are now available to readers of Popular Mechanics Magazine. If you contemplate building a small house, you may obtain these plans, which include a list of materials, a "fool-proof" specification, contract forms, blueprints, and in addition you may have expert counsel and advice during the building of your home, all at a cost so low that in many cases it is less than one-tenth what such service usually commands.

This service is offered to readers by Popular Mechanics Magazine in co-operation with the Architects' Small House Service bureau as a new and distinctive advance in the field of small homes. The bureau does not provide service for houses larger than six rooms, and advises everyone to employ a competent local architect for every job, big or little. It urges people to procure individual designs and constant expert supervision while building. If, however, the home builder is unable to obtain the service of an architect, that is the point where the bureau steps in and says, "Use bureau service next, if your house is a small one."

In addition to any service which the bureau movement provides, it always recommends that a local architect be employed to supervise the building of a house. If that is impossible, the bureau stands ready to back the home builder with expert counsel, and, in fact, appears in the printed specifications and contract forms which it supplies, as the party of the third part—a home builder's architect.

The bureau has several hundred stock plans already prepared. It functions through eight regional bureaus, in various parts of the country, the members of which design homes suited to the climate and needs of their particular locality. Plans drawn for a house in California might not be suitable for the middle west, or an eastern home for the Rocky Mountain states, but each regional bureau is ready to furnish just the type of house needed by Popular Mechanics Magazine readers.

To obtain printed suggestions of many homes with floor plans and general information about each house, the reader is under no obligation except to write to Popular Mechanics Magazine stating his needs, and inclosing a stamped and addressed envelope for a reply. The request will be turned over to the bureau, which will send suggestions from which to make a selection. With a house selected, the

Copyrighted material

3038

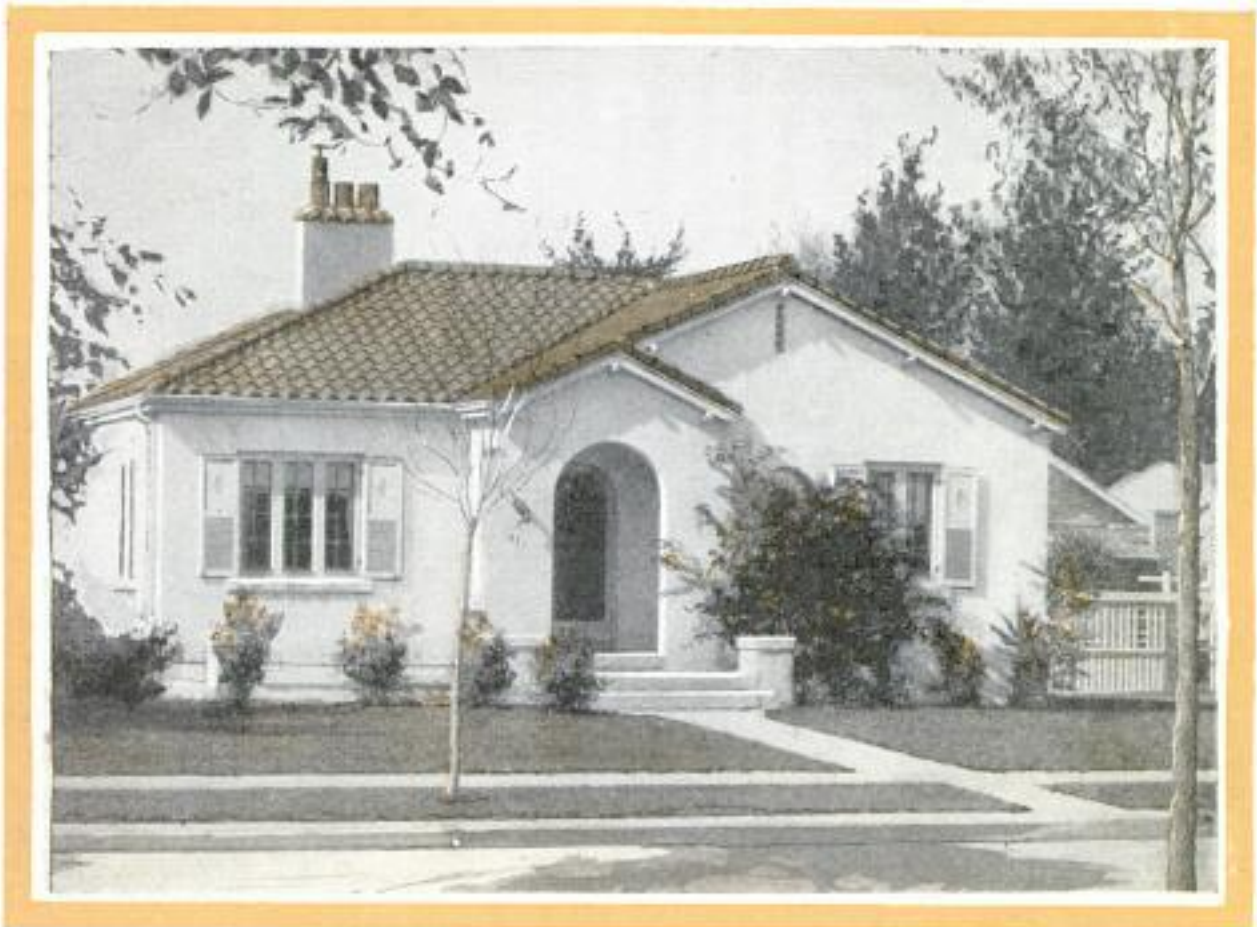

Italian-Type Bungalow, with Stucco Walls over Hollow Tile and Roof of Tiles in Variegated Reds, Browns and Grays, and Attractive Old-Fashioned Shutters

complete blueprints, specifications, quantity survey and blank contract forms may be obtained, on approval, for an inspection fee of $5.50. They may be retained for fifteen days, thus permitting the prospective home builder to submit them to as many local contractors as he desires and get competitive bids on the work. If he decides to go ahead and build, the inspection and estimating fee will apply on the price of the service, ranging as it does from $17.50 to $32.50.

If the bids received are too high, or another type of house is desired, the plans may be returned and others obtained, without payment of any additional inspection fee. So long as plans are returned in good condition the first $5.50 fee, except mailing charges, will permit Popular Mechanics Magazine readers to obtain additional sets of plans until they find one that suits them. For the future home builder who needs more assistance in planning a home and financing the building of it, the bureau offers several home-building books at cost. They contain from fifty to more than 100 plans each, on planning, financing and saving money in building, as well as advice on how to arrange for home-building loans, first and second mortgages, or contracts to deliver deeds.

FIRST FLOOR
CEILING HEIGHT 8'-6"

The architects' bureau is a little over five years old, but in its brief life has been respon-

Copyrighted material

3038

sible for the building of several thousand homes. The investment in houses built from its plans last year totaled millions of dollars, and every house built stands out from its neighbors because of its tasteful design.

"The bureau," says Maurice I. Flagg, director of service, "has grown from a modest beginning of an experimental nature into a nation-wide organization with a membership of about 200 architects. For the first time in the history of American home building, builders of small homes may now have many of the advantages of professional architectural service at low cost. What are these advantages, and why are they offered to the home building public at a price, in many cases, perhaps ten times less than the same service would cost if it were supplied by an individual practicing architect?

"For a great many years the little house has been a big problem for the average architect. It costs about as much to prepare drawings and render service on a small house as on a large dwelling. The result has been, and is today, that many of America's foremost architects, as much as they would like to serve the small-home builder, are quite unable to do so, unless home builders are willing to pay a price for this service, which, under ordinary conditions, is more than the average builder usually feels he can afford.

"The result is evident on every hand. In nearly every city and town, thousands upon thousands of little homes have grown up overnight, entirely lacking the skill and professional touch of the trained architect. These houses have become a real menace to communities. They are not only unattractive in design, drab, monotonous and commonplace, but, nine times out of ten, they are wasteful and a hazard as far as an investment is concerned.

"The Architects' Small House Service bureau movement was originated in Minneapolis five years ago, a group of architects thinking along the same general lines deciding to try out locally a group of plans for small houses, and to offer these to the public at a low cost. Out of this experiment came an approval by the committee on small houses of the Ameri-

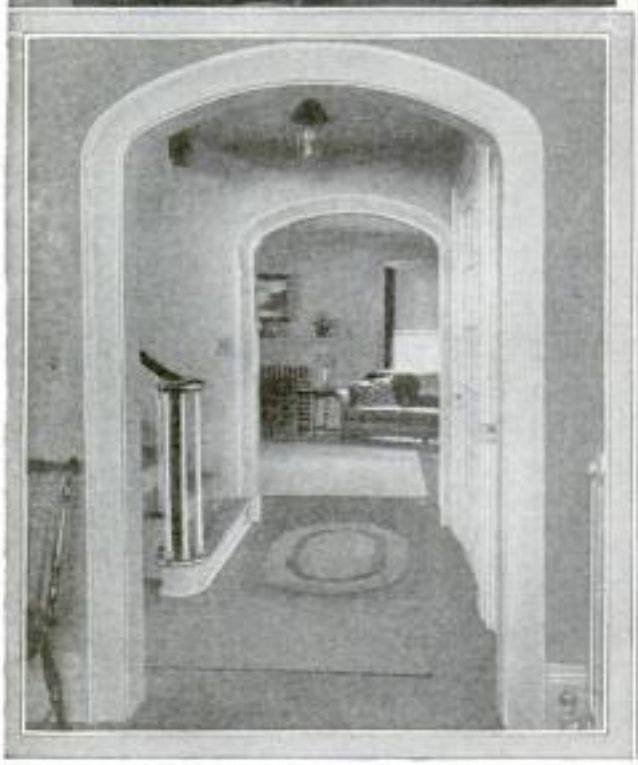

Above, Studying Small-Homes Plan Books; Below, an Attractive Vista of Hall and Living Room, and View of Kitchen, Both from Plans Available to Readers

Copyrighted material

3038

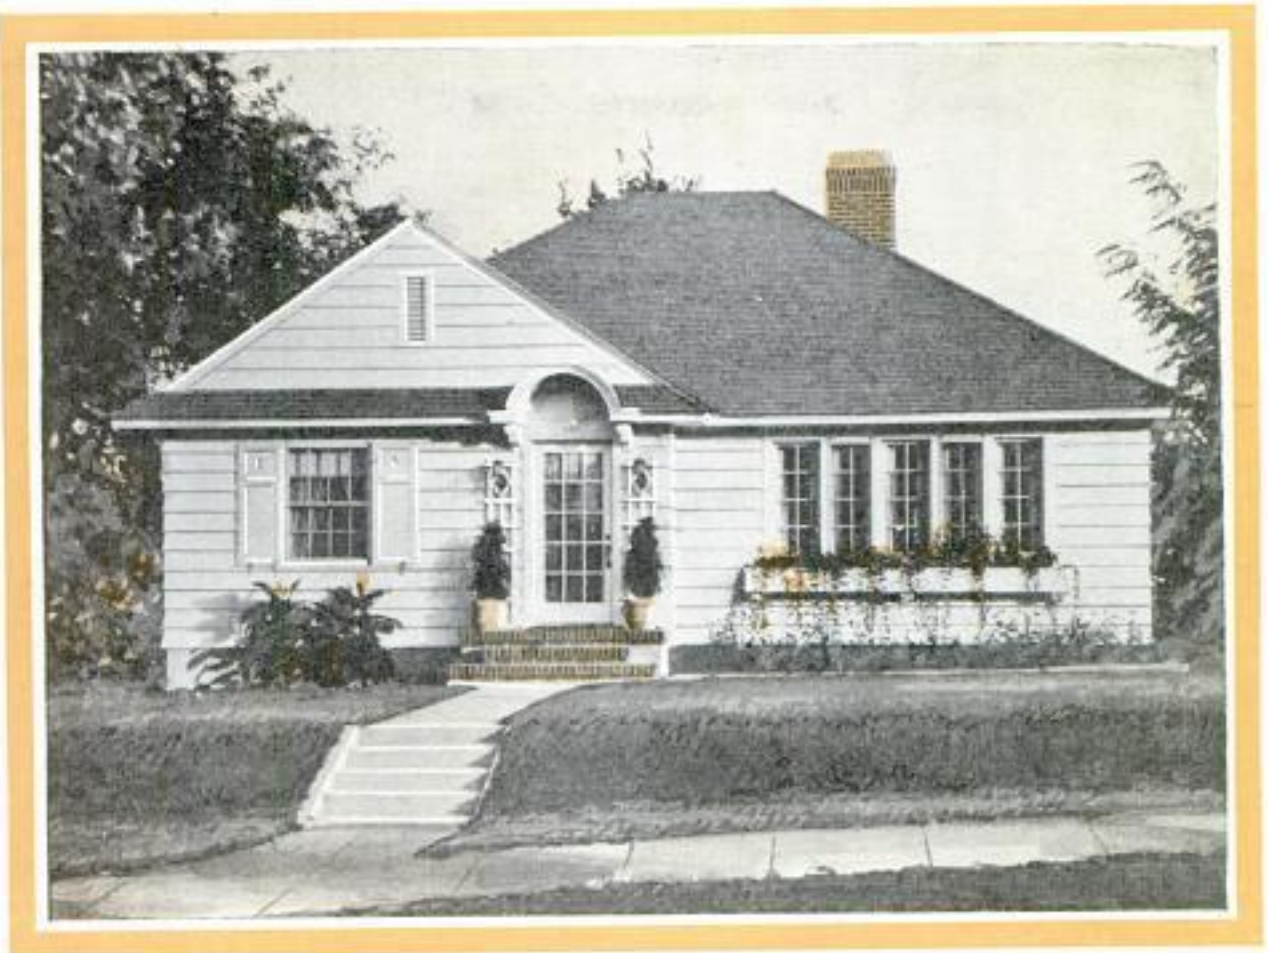

Good Colonial Style, Full-Sized Rooms and Bath, Beautiful Doorway and an Attractive Fireplace Dominating the Big Living Room, Feature This House

can Institute of Architects. Later, as the bureau developed, it received the official endorsement of the institute, and finally, when the Architects' Small House Service bureau of the United States, which is the parent organization, was formed, the control of the bureau movement was taken over by the institute itself. The institute has no financial interest in the bureau, nor is it responsible for any of the individual acts of the members or any of the designs. It is a controlling body only, to insure that the bureau will not assume commercial aspects, and that its purpose will, at all times, be in accord with the professional practice and ethics of the architectural profession."

The bureau movement is the only agency of its kind in the United States operating with the endorsement of the department of commerce. Herbert Hoover, secretary of commerce, in giving that endorsement, wrote: "I have looked into the work of the Architects' Small House Service bureau of the United States with its divisions and branches and have examined its organization and incorporation papers. The complete plans, specifications, documents and bills of materials, with the

Copyrighted material

3038

designs worked out for local conditions and to use stock materials and eliminate waste, materially simplify home-building problems.

"The form of control by the American Institute of Architects should guarantee a high standard of service.

"It gives me pleasure to endorse this work and to assure you that the department of commerce will do all it can to co-operate with the institute and the bureau."

In arranging with the bureau to supply this service to Popular Mechanics Magazine readers, answering all their questions about home-building problems, and guiding them in their building operations, this magazine endorses the fundamental idea of the bureau. Its sole interest is the desire to improve the architecture of the small house in America, to eliminate waste in the building thereof, and to insure good, safe and at the same time, economical homes.

The bureau is practically a non-profit making organization, whose members are professional men that have no ax to grind nor interest, in any form, in building material or supplies. The plans which are offered to Popular Mechanics readers are complete professional drawings, prepared by various architects, and sold to the bureau at the usual fee commanded by their creators. The bureau in turn, by reproducing them in large quantities, is able to supply them with complete service, counsel and advice at a nominal charge.

The plans used to illustrate this article are typical of those produced by the bureau architects, and each is accompanied by a photograph of the house, as it appears when actually built by some home owner who has availed himself of the service offered. Architects' sketches and wash drawings cannot convey as accurate an idea of how a house will look when completed as these photographs.

All of the plans are featured by compactness of design, with maximum attention to lighting, convenience and ventilation. Dining alcoves, kitchens scientifically planned to eliminate waste steps, modern laundries, plenty of closets—these are some of the things provided. In the majority of the plans offered by the bureau care has been

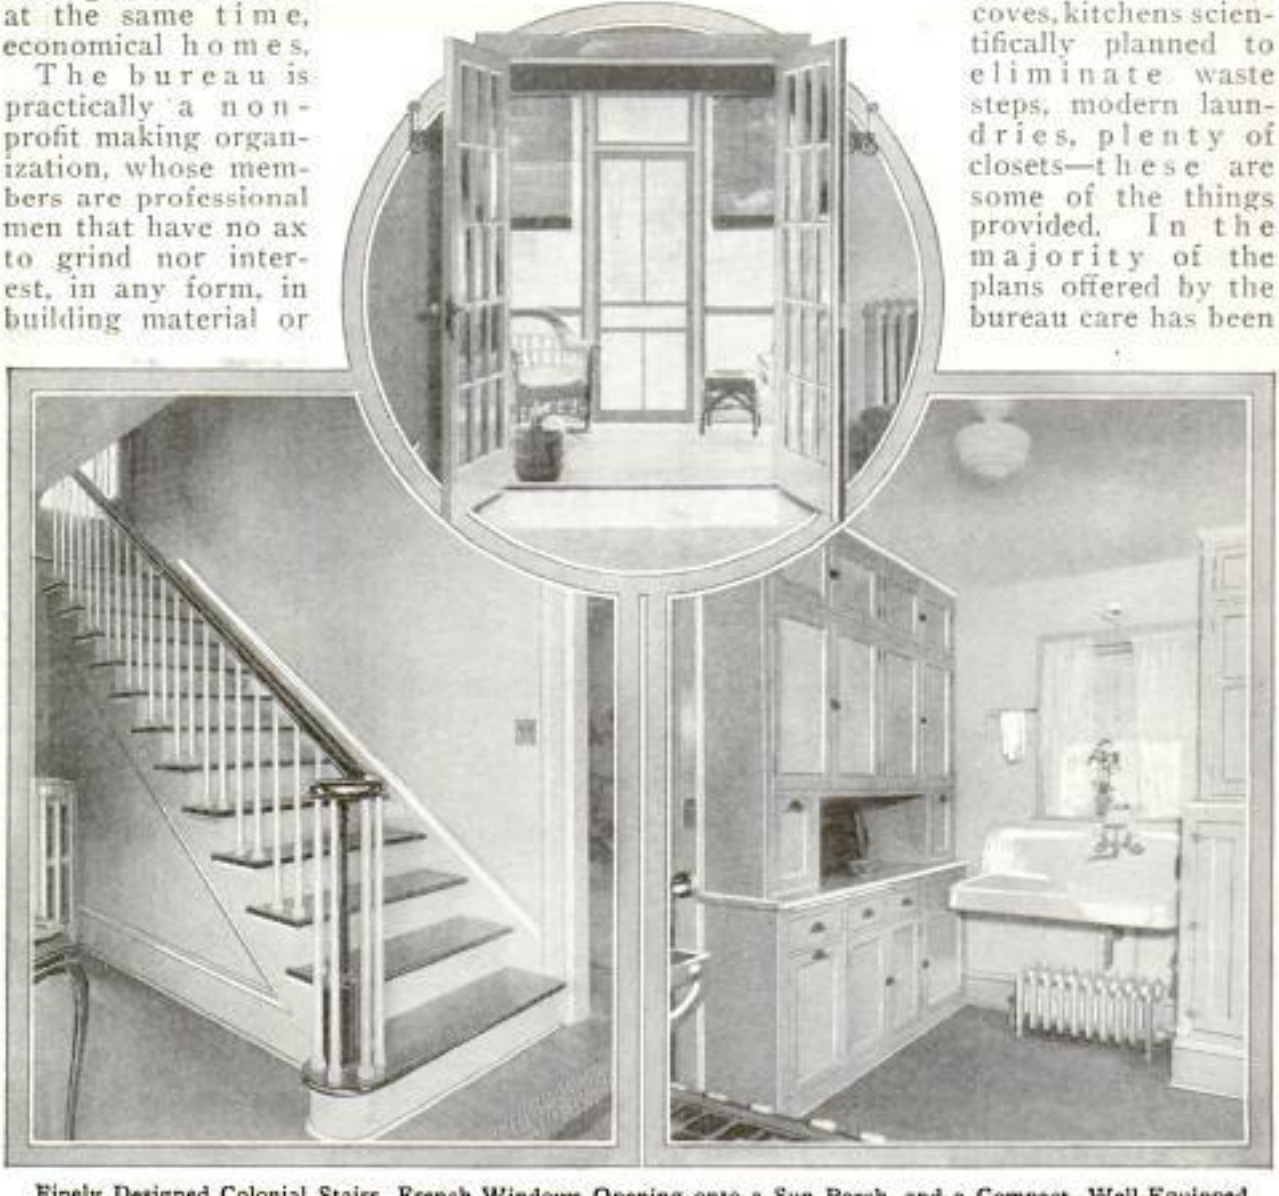

Finely Designed Colonial Stairs, French Windows Opening onto a Sun Porch, and a Compact, Well-Equipped Kitchen from Architects' Small-Homes Plans

Copyrighted material

3038

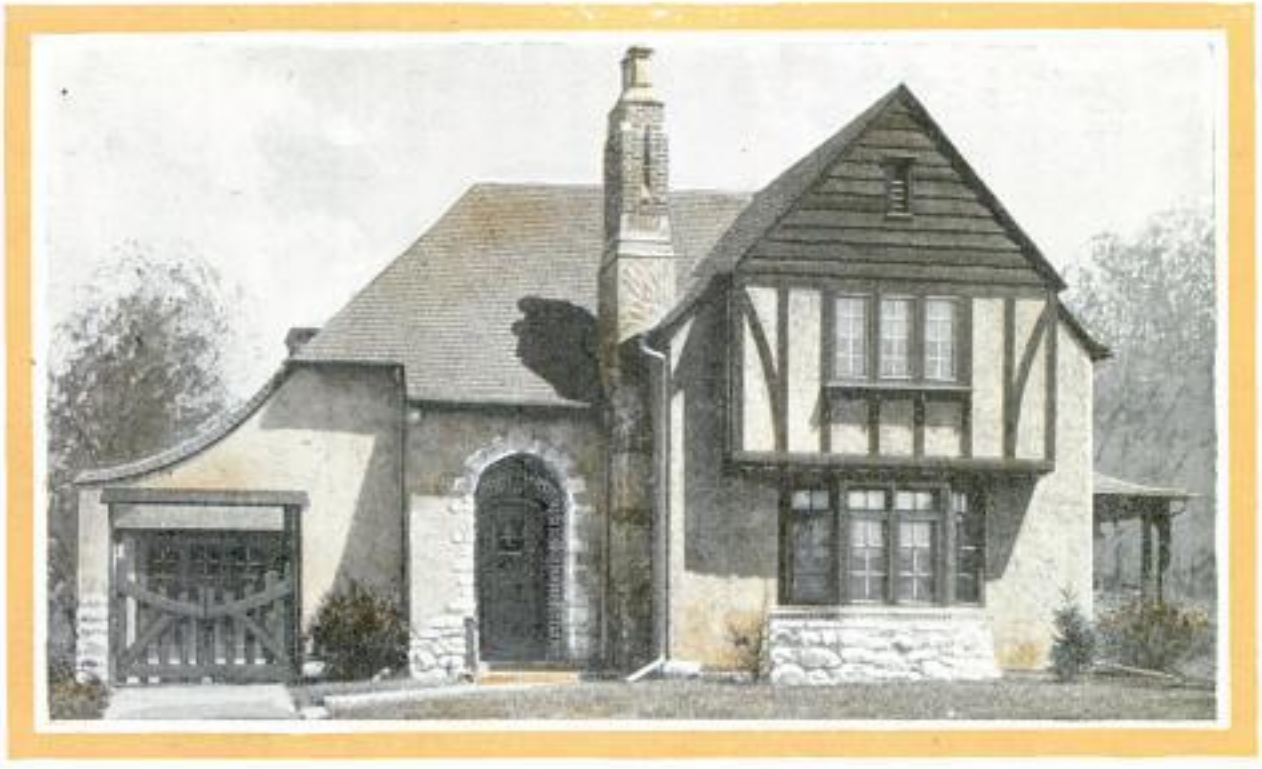

Tudor and Elizabethan Styles Combined in Attractive Six-Room Home

taken to provide two exposures, with cross ventilation, for every bedroom.

The plans are also marked by their artistic combination of materials—weathered woodwork, tinted stucco, tiles in variegated colors, or colonial combinations of white and green.

While the architects' bureau does not design special houses for any individual, minor changes may be made in many of the plans offered to conform to individual desires. The bureau will not make changes which would injure the durability or good design of a house, but will redraw designs to relocate doorway, omit or add a partition, or add or subtract a porch, pantry, or breakfast nook, if possible and desirable. Many houses which are shown with shingle or clapboard exterior may be as readily finished in stucco or brick, or vice versa. Advice in planning such changes is given free, and any necessary drafting can be had at the cost of the draftsman's time.

The bureau also is in position to furnish reversed blueprints in order to give the proper exposures for a house designed to face south, if it is to be built on a lot facing north, and so on. Such blueprints are furnished without extra charge.

Each month a new plan with picture of a house actually built from it, will appear in this magazine, and from time to time Robert Taylor Jones, technical director, will contribute articles covering home-building problems.

FIRST FLOOR

SECOND FLOOR

Copyrighted material

3052 The Engineer 3/27/25.

Hydro aeroplane

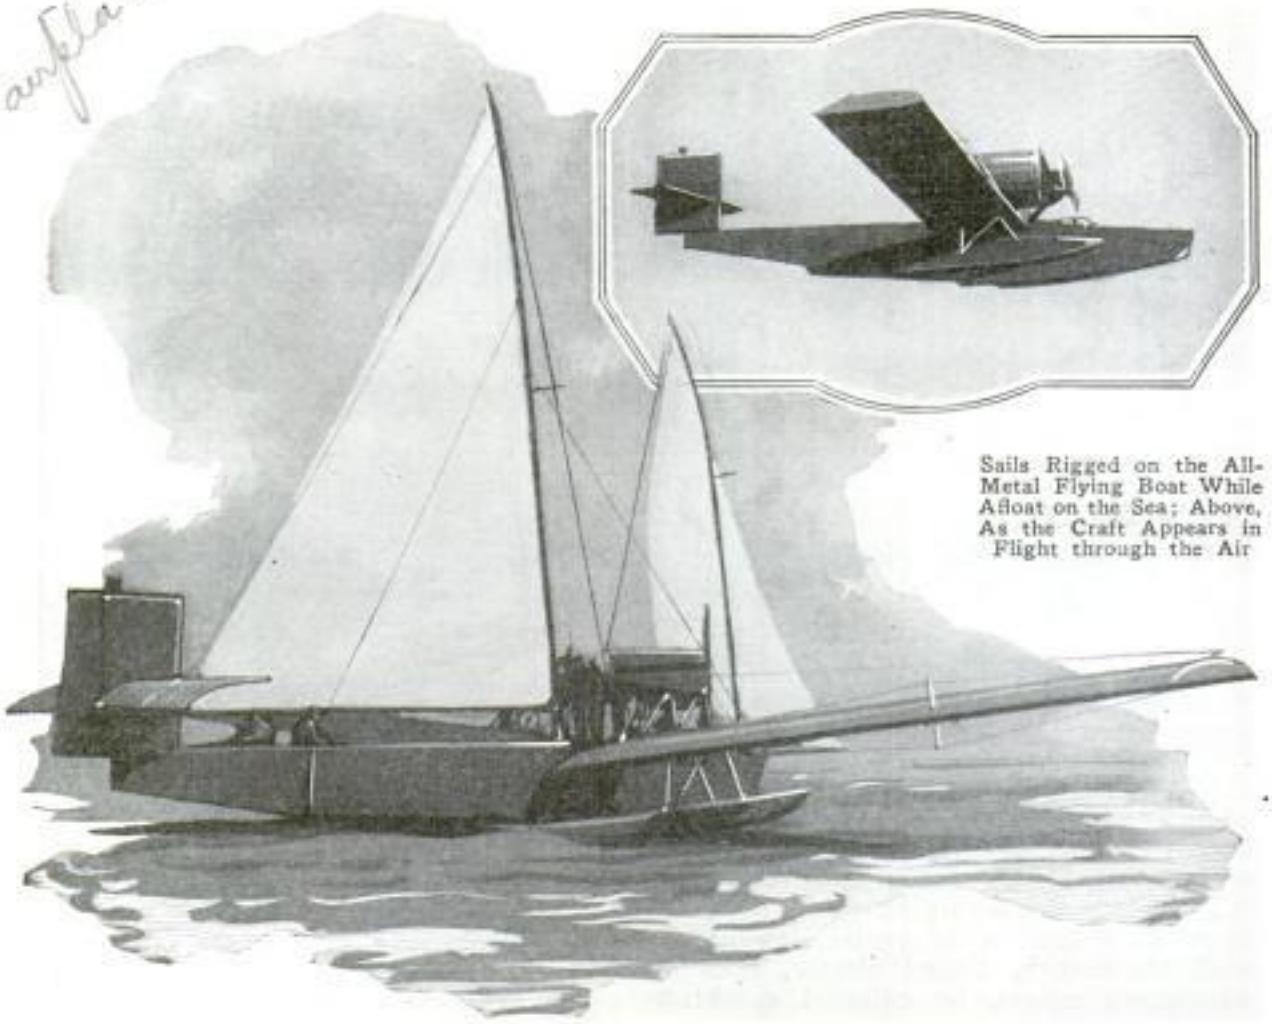

Sails Rigged on the All-Metal Flying Boat While Afloat on the Sea; Above, As the Craft Appears in Flight through the Air

METAL FLYING BOAT HAS SAILS TO AID CONTROL ON WATER

With an equipment of collapsible masts and sails that can be rigged up in a short time, an all-metal flying boat manufactured in Denmark, affords greater control when riding the water during bad weather and economizes in the use of fuel required to drive it to and from its mooring. The craft is constructed throughout of "duralumin," an extremely light but strong metal. The design of the framework is similar to that employed in bridges and shipbuilding, resulting in a powerful body, capable of carrying a much wider wing span than is usual in boats of this class. It is of the monoplane type with large metal pontoons fitted under the wings near the fuselage, to insure sufficient support while resting on or traveling through rolling seas. The machine is propelled by two engines installed above the wings and raised clear of them by metal supports. This arrangement of the twin driving units is claimed to make maneuvering with but one motor operating an easy matter. At ground levels the flying boat is said to be capable of traveling at a speed of 124 miles an hour, and to be able to reach an altitude of 13,000 feet. Fully loaded the craft weighs six tons, and with three-quarters of this burden can fly with only one engine running without losing height, it is claimed. The wings are strong enough to permit workmen to walk to any part of them, an advantage of considerable aid in tying up at moorings or in other sea work. When the ship is to be beached, the wings are supported by two-wheeled trucks placed under each wing and secured by guy ropes. Water-tight compartments with closing doors for emergencies are constructed so the craft will remain afloat in water, even with two of the chambers flooded.

3096

RUST CONVERTED INTO METAL RESTORES ANCIENT RELICS

Priceless relics of ancient metalwork turned to lumps of rust by the action of time, are being restored to their original shapes and colors by an electro-chemical process devised by Prof. Colin G. Fink of Columbia university. More than 600 objects of bronze, silver and other art metals, so corroded that they have defied

Herald Examiner 4/16/25

Copyrighted material

identification, are said to have been successfully treated by the method. The corrosion is caused by faint electrical currents operating on the materials over a long period of years, and this effect is reversed in the process by subjecting the metals to stronger currents of opposite polarity. Fake bronze antiques which have been artificially aged by special treatment are also easily disclosed by the system. Where thin coatings of gold on specimens of ancient jewelry have been damaged by acids and chisels in attempts at restoration, the platings are said to be left intact by the electro-chemical method.

FISHING CAN FOR LIVE BAIT, TACKLE AND CIGARS

Live bait, and even cigars and matches, can be carried in a three-compartment container suspended from the fisherman's shoulder by a strap and always within easy reach. It is about the size of a gallon pail, is water-tight and will float. The main section is of zinc and has a cap that will not rust. There is an air space for ventilation and water can be allowed to circulate through if the can is to be used as a creel. Bait such as minnows, frogs and crawfish can be kept alive for a whole day's sport, in this large chamber. Two smaller compartments at the sides, also with tight caps, keep the tackle dry or may be used for matches and tobacco. The can is smoothly finished on the inside so that it will not scratch the hands, and the absence of sharp corners on the outside prevents its catching on branches when walking in underbrush.

Bait Cans in Use, and Inset Showing Compartments with Screw Tops for Cigars and Extra Tackle; Water Inlets Below

London "Bobby" Donning White Sleeves That Help to Make Traffic Arm Signals Easily Seen

WHITE SLEEVES ASSIST POLICE IN GIVING TRAFFIC SIGNALS

Guardians of traffic in London streets may be equipped with white sleeves so their signals can be more easily distinguished by vehicle drivers and pedestrians in congested districts. The cuffs, which reach to the elbows, may be removed when the officer is away from his station, and slipped on in a few seconds. Together with the white gloves now worn by the "Bobbies," the sleeves present a striking "flash" that can be seen for a great distance, and will enable traffic to perceive the policeman's arm movements more clearly when he is surrounded by pedestrians or partially hidden against a dark background. Less delay due to misunderstandings of directions is expected to result from the use of the sleeves.

Copyrighted material

2582 Episcopalian

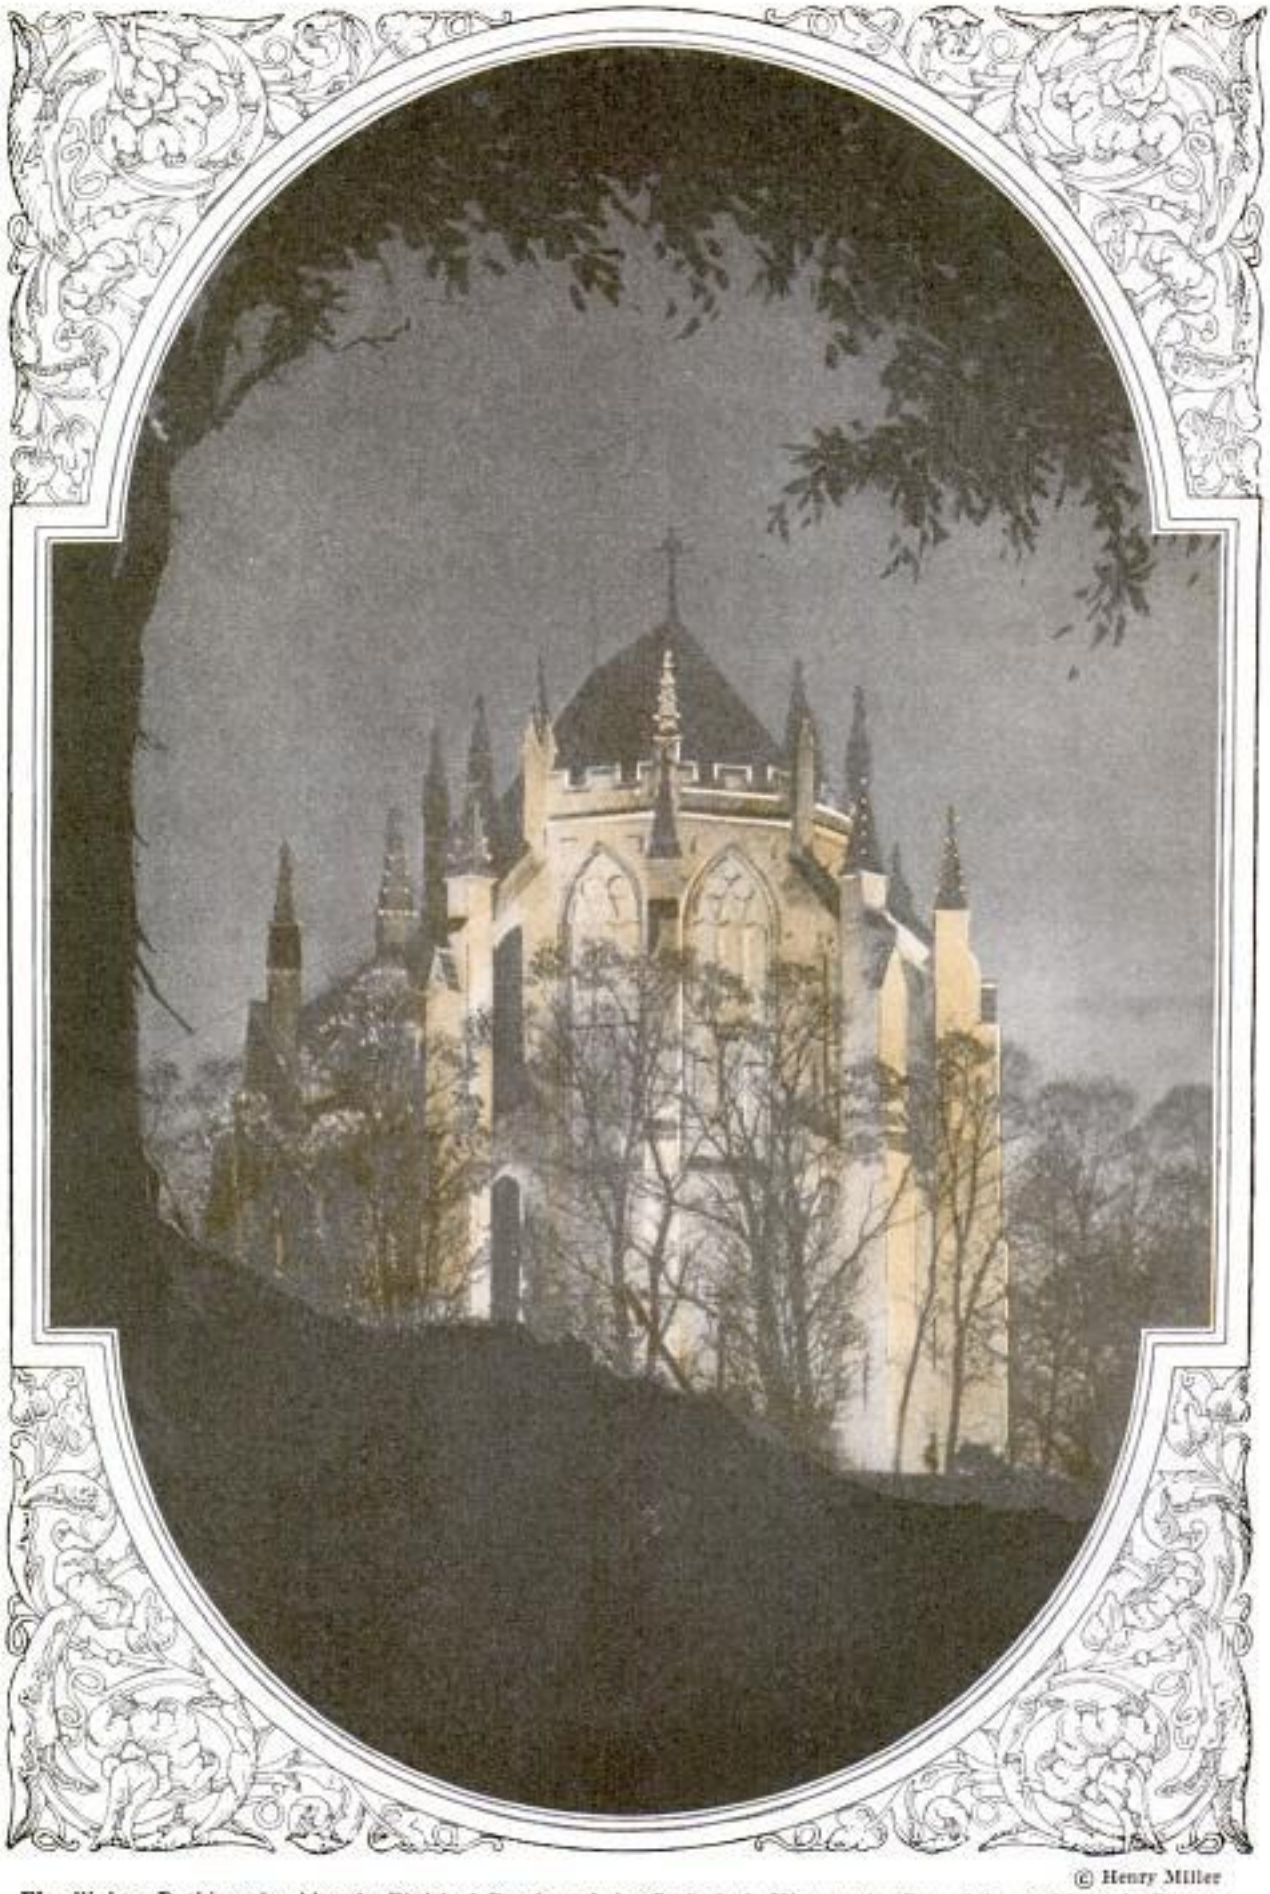

© Henry Miller

Floodlights, Bathing the Already Finished Portion of the Cathedral, Hint at the Peaceful and Majestic Beauty That Will Glow from the Completed Structure at Nightfall

Copyrighted material

2582 Henry Miller News Picture Service 579-13th St. N.W. Washington, D.C.

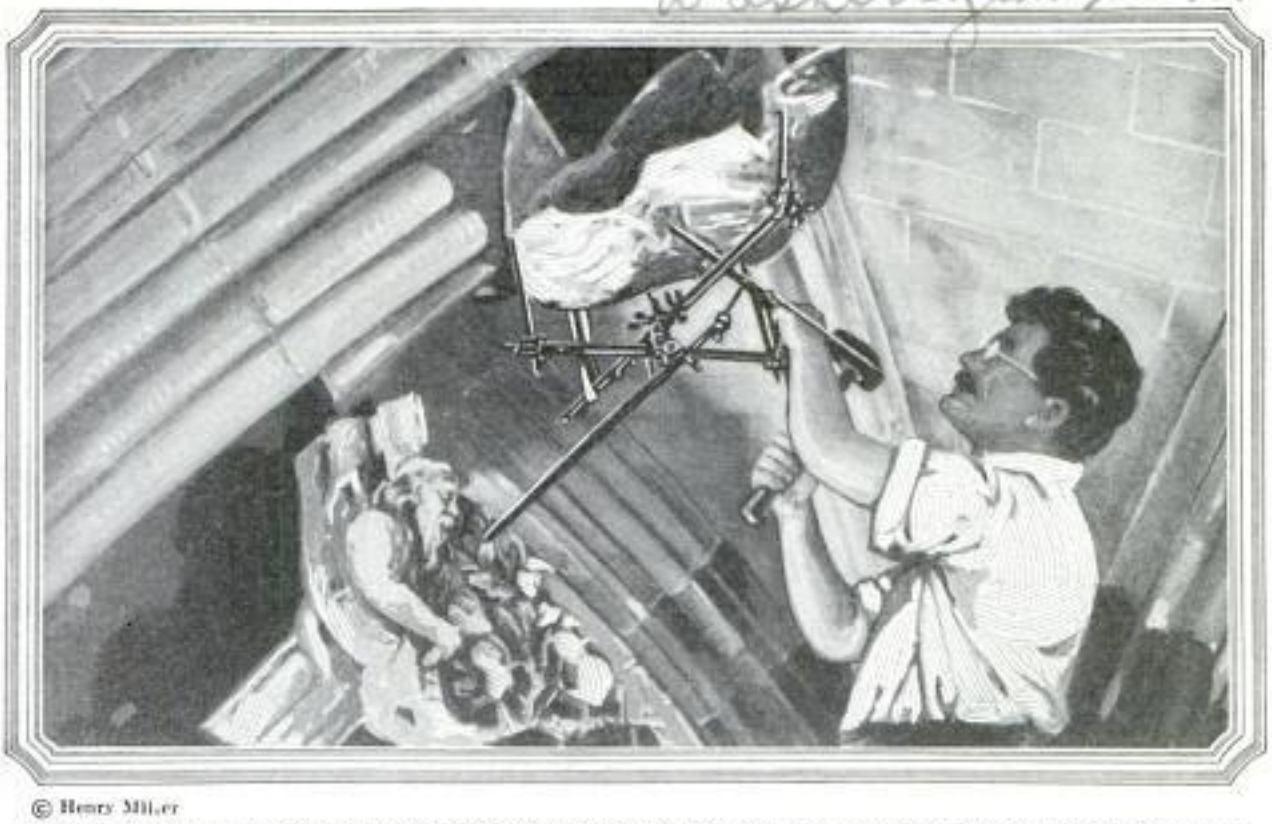

© Henry Miller

Modern Appliances Aid the Sculptors Who Are Carving, in the Stone of the Vaulting Aisles of the Cathedral, Symbols That Tell the Christian Story

Building for Eternity

Washington Cathedral, like Gothic Masterpieces of Europe, Is Planned to Last for Ages

IN view of the speedy erection of modern skyscrapers, why should so many years be required to build great cathedrals? This inquiry is often made, and knowledge of the answer brings a fuller appreciation of the beauty of Gothic architecture.

Modern office buildings are built for investment with immediate financial return. Their specifications call for the maximum space for rent, the smallest expenditure of money, and an imposing exterior. The floors are as nearly as possible duplicates of each other. A veneer of stone provides the desired front.

A cathedral, on the other hand, is not built for financial profit. It is built for eternity, primarily for the benefit of future generations. It is built of enduring stone, with ten times as much stone as would be necessary for a steel-and-stone structure of similar size. There is little duplication. Every part is different. Gothic architecture, especially, does not repeat. Every stone, carved window, arch, tower, and pinnacle is subtly varied. Thousands of pieces of sculpture and carving each tell a different story; every window is an individual work of art. There is an infinite gap between the building set up for the purposes of Mammon and the house of prayer erected to the glory of God.

The erection of any building can be divided into two parts, planning and construction. As much time is necessary for planning a Gothic cathedral as for building one. Congress granted a charter to Washington Cathedral in 1893. The architects have been at work on the plans since 1906. Today the architects estimate the remaining work will take at least five years. Endless refinements and subtle variations, careful mathematical computations necessary to meet the thrusts of the stone vaulting and the weight of the solid masonry, the designing and redesigning of models for the sculpture and sketches for the stained-glass windows, all of which must conform to the traditions of Christianity and the most comprehensive scheme of symbolism ever devised for a cathedral, require many years of planning.

Copyrighted material

2582

Modern methods of construction, speedier transportation and improved machinery mean little in a cathedral enterprise. These must all be adjusted to the essentials of monumental building—the laying of brick, the setting of stone and its carving after being set in place. This is all hand labor, and in the performance of this hand labor we are today probably not as efficient as in the thirteenth century. The average workman is not as skilled, and there are fewer workmen of this class available. This point is illustrated by a recent incident. A workman with a reputation as a skilled mason was called from a distant state. He spent one day looking over the work at Washington Cathedral and then packed his tools and left, saying the work was entirely beyond his ability. American workmen are as good as any other; there is no necessity for importing men, in fact Washington Cathedral is an American cathedral in men, in material, and in ideals. The scarcity of skilled cathedral builders is world-wide and Washington Cathedral is now a training school for builders of the ancient standard of craftsmanship.

Naturally, the cost of erecting such a structure is great; but although the initial cost is about three times that of steel and stone, it will last ten times as long. The Church believes in investing for eternity. There is probably nobody who seriously contends that the cathedrals of Rheims and Seville, and the Westminster Abbey should have been built of steel and stone

Hours of Patient Handwork Are Required to Fashion Lace Out of Stone for Arching Gothic Windows, Revealing Why a Cathedral Cannot Be Built in a Day

Copyrighted material

2582

Looking from the North Where Builders Are at Work Next to the Apse, Which Was Started in 1915, Is 147 Feet High and Forecasts the Beauty of the Whole; Below, Examining Some of the 1,000 Symbolic Figures That Will Illustrate Christian Precepts

© Henry Miller

Copyrighted material

2582

veneer. They would have looked as well as a stone structure for the first fifty years, but after that they would have had to be rebuilt every hundred years. They would not have stood for 1,500 years as has St. Sophia in Constantinople.

While it is the aim of the builders that the cathedral reflect the spirit of America, it is being constructed on strict Gothic lines. Every stone in it is essential to its strength. Like the great edifices of Europe, it is laid out in the form of a cross, the arms of which will constitute the north and south transepts, each with an entrance. Beneath the south transept, will be the chapel of the Resurrection, a crypt of Norman architecture. The central tower of the cathedral will be 262 feet high and as the building occupies a commanding site 400 feet above the level of the city, the top of the tower will be 107 feet higher than the Washington monument. The completed structure will be 534 feet long, 29 feet more than the length of Westminster Abbey. It is estimated that it will cost $10,760,000.

Building of the apse, which is 147 feet high, commenced in 1915. It will contain the sanctuary. In 1922, the foundation outside was begun and was finished in fifteen months. It contains 422,000 cubic feet of concrete into which went 9,000,000 pounds of cement, 10,000 tons of sand and 18,000 tons of gravel. It contains a labyrinth of passages, store and heating rooms and places for workshops. The cathedral is being erected on a densely wooded spot and it was necessary to cut down many of the trees. A number of the oaks that grew here are being carved to form the stalls and woodwork of the choir. The great church will be the central structure in a group of other buildings, including a number already finished and about thirty that are being planned. Among the latter are houses for retired clergymen, an administration building and additions to the boys' and the girls' schools that now share the site.

Washington Cathedral is being built for the ages. It is one-ninth completed. The Bethlehem Chapel, beneath which Woodrow Wilson is buried and from which are broadcast the services every Sunday afternoon, is in the apse, underneath the main floor of the cathedral. The aim of the edifice is to express the nation's religious faith in the most artistic manner in accordance with the ideal of spiritual beauty, and much exquisite sculpturing already has been done to carry out its scheme of symbolism. Some day, when the Cathedral Close is built up with thirty more buildings and is surrounded by a wall with twelve gates, it will justify the description —a Holy City on a Hill.

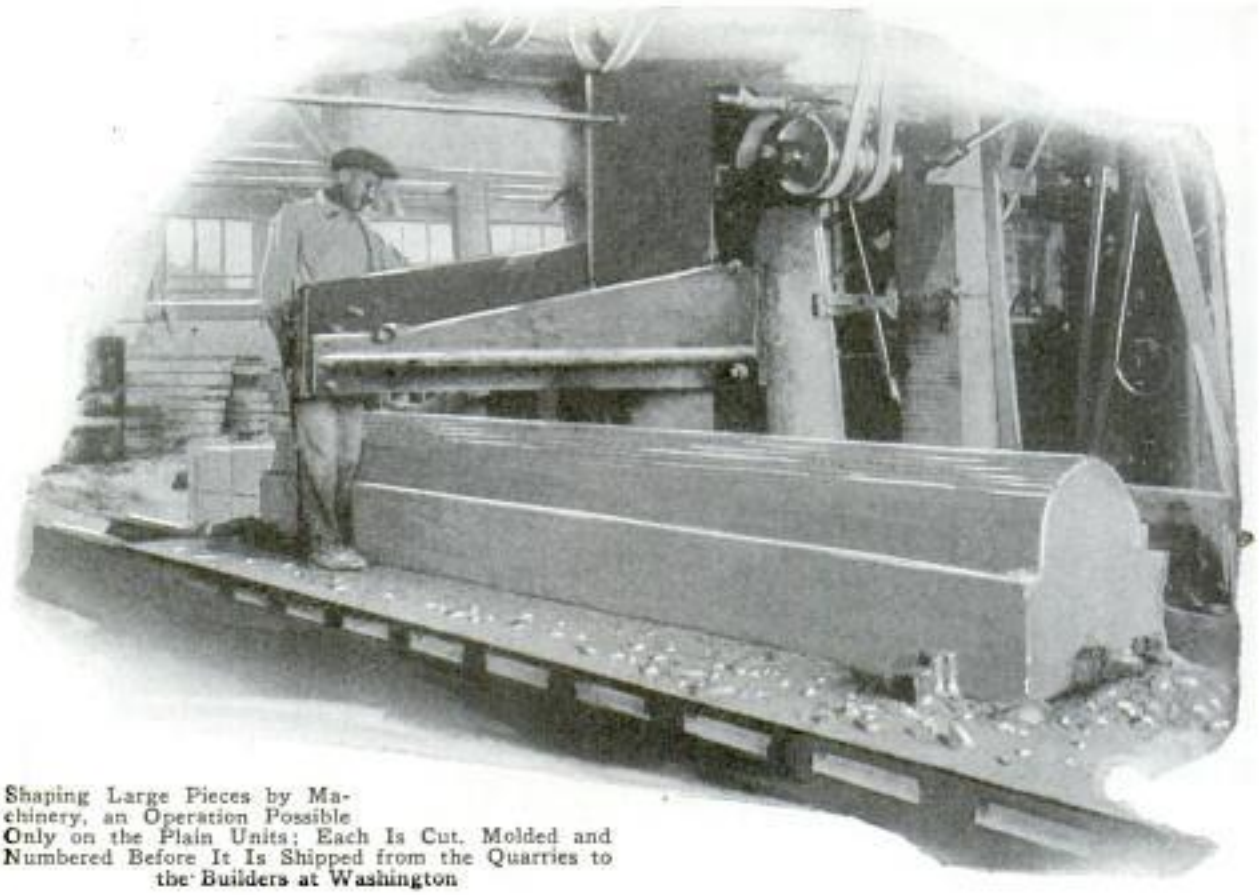

Shaping Large Pieces by Machinery, an Operation Possible Only on the Plain Units; Each Is Cut, Molded and Numbered Before It Is Shipped from the Quarries to the Builders at Washington

Copyrighted material

3109

ARMY DIRIGIBLE TO ACT AS CARRIER FOR PLANES

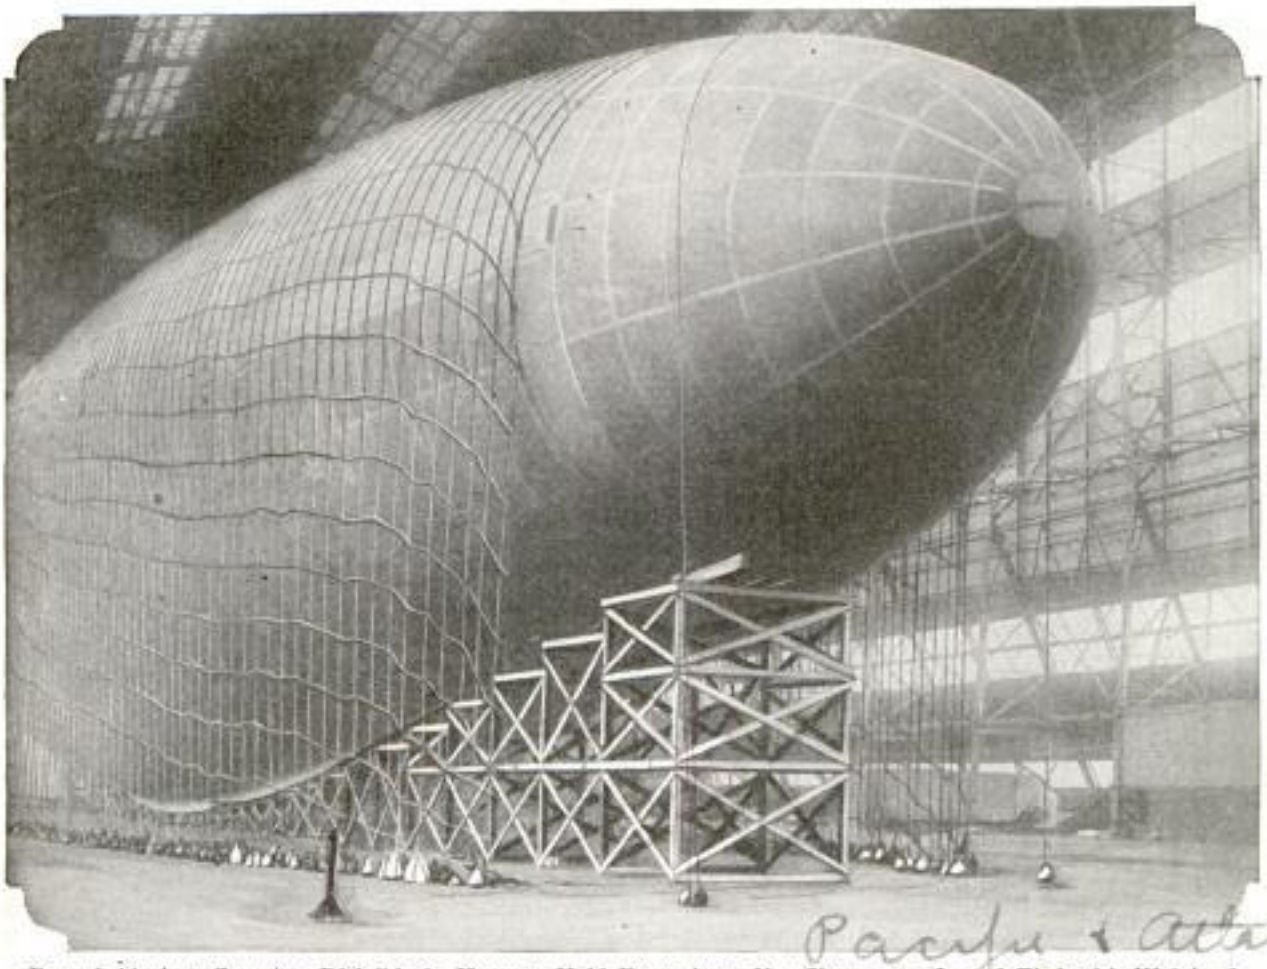

Bag of Airplane-Carrying Dirigible in Hangar, Held Down by a Net Slung over It and Tied with Weighted Bags; Car and Apparatus for Planes Are under Construction

Encouraged by the performance of the massive dirigible airships "Shenandoah" and "Los Angeles," the army air service is completing the first semi-rigid craft to be built in this country. The ship, "RS-1," is designed to afford a high factor of safety under all conditions, its ability to perform difficult maneuvers being a secondary purpose. The newest giant of the government air fleets is 282 feet long and has a capacity of 719,000 cubic feet of helium gas. It will be driven by four 300-horsepower motors, capable of producing a speed of 70 miles an hour, with an ordinary cruising velocity of fifty-five miles an hour. The airship will be employed as a mothership for airplanes, being equipped to carry them to their areas of operation.

OIL-BURNER FOR MELTING TAR CUTS COST OF ROOF REPAIRS

Pitch and tar for repairing roofs are melted in an oil-burning heater that eliminates littering the streets with scrap wood and ashes. It is rigged in the rear of a small automobile truck. Solid lumps are put into the melter at the top, and the melted material is drawn off through a spigot. There is a sixty-gallon tank to hold the fuel supply, and air pressure of thirty pounds is maintained by means of a hand pump.

Tending the Portable Oil-Burning Tar Melter in Auto Truck for Quick Roof Repairing

Copyrighted material

Kansas City Times 4/10/25

2985

Massive Suspension Bridge over Hudson River near Albany Which Joins Busy State Highways

SIX MILLION DOLLAR BRIDGE JOINS MOUNTAIN ROADS

Built at a cost of $6,000,000, the Bear mountain bridge over the Hudson river near Albany, N. Y., has a roadway wide enough to accommodate four lines of vehicles, or a capacity of 5,000 an hour. The structure, which is of the suspension type, has a central span 1,632 feet long. It connects the sections of one of the state's important highways, and stands 150 feet above the river. Though situated in a mountainous country at a sparsely settled point, the bridge is elaborately equipped with electric lights and sidewalks for pedestrians.

3089

MODERN BURNING BUSH SEEN BY WYOMING CAMPERS

Rivaling the biblical story of the burning bush, an experience with static electricity related by three Wyoming motorists, left the victims almost smothered when the charge caused acres of sagebrush to become luminous. According to the travelers, they were enveloped in heavy charges of static electricity while camping for the night near the foothills of the Big Horn mountains, and awakened from sleep by their inability to breathe in the still, dry air. Large patches of surrounding vegetation were lighted up by an unconsuming flame which apparently gave off no heat and but little light. Almost smothered, one of them attempted to crank their car, and received a severe shock as sparks leaped from his fingers to the metal. No amount of effort could start the engine of the car, and trapped in the suffocating atmosphere, in which they could detect a distinct odor of sulphur, they painfully labored for breath for about ten minutes, when a wind arose and drove the charged atmosphere from the area.

3040

JAZZ HORN REQUIRES NO SKILL AND SOUNDS LIKE TROMBONE

The "Swanee sazzafone," an instrument for playing jazz music, introduced in England for use in either orchestra or solo work, does not require a trained artist and can be played by anyone able to hum a tune. Equipped with two bells, the device is said to produce the effects of a muted trombone or trumpet. There are no keys on the instrument, the player forming the various notes and tones through the mouthpiece. Since the horn may be played without the need of printed notes, it can be used in connection with other instruments by a performer unskilled in music and does not necessitate long practice to master its operation.

Playing the "Swanee Sazzafone" Which Sounds Like a Trombone and Requires No Musical Skill

Copyrighted material

By CORLEY McDARMENT

ONE bright afternoon at a flying field near Washington, a large crowd had gathered to witness an aerial circus. The ordinary flying stunts were carried out and the people marveled, but there were no outbursts of enthusiasm because most of the tricks had been done before and nearly everybody had seen them.

But suddenly a speck appeared away off against the blue sky background. The stunt planes hurriedly landed and cleared the field. The speck grew into a speeding plane. When right in front of the spectators, the machine dipped almost to the ground, then quickly the nose went up. At about 2,000 feet, the machine whipped over on its back, came out level again, and after making a wide circle, once more headed for the flying field. This time it flew level, and when opposite the spectators, a most uncanny thing happened. The people gasped in silence.

From beneath the machine snow-white vapor began to spout. This vapor, spreading out like a fan, began falling to the ground like a magic curtain, and instead of crumpling and blowing away, stood upright as if strung upon solid wires. This was the newest type of smoke screen that modern science has developed, a new element in human affairs and a factor for good or for evil, depending entirely upon the moral attitude of the people who use it.

Quietly in the laboratories of the great world powers, scientists have been peering into test tubes and carrying out experiments in an endeavor to perfect a curtain that could be hung in the sky. It is now a fact—a dream come true—and it is an offspring of aviation, the latest and most spectacular invention mankind ever concocted. Without airplanes, sky curtains could not be hung from horizon to horizon in less time than it takes to write about it.

Within a small box that one man can carry, enough curtain-making material can be packed to screen a whole city, an entire army or a whole fleet of battleships. One airplane can easily fly with such a load. And with airplanes traveling at 200 miles an hour and over, little chance exists to stop an aerial curtain hanger with guns.

A curtain of white chemical makes a beautiful thing to look upon when dropped from an airplane, but it was certainly not for entertainment that it was developed. The chemicals that go to make up a smoke screen are a deep secret. Each foreign country has its own mysterious preparation on this line.

Copyrighted material

3065

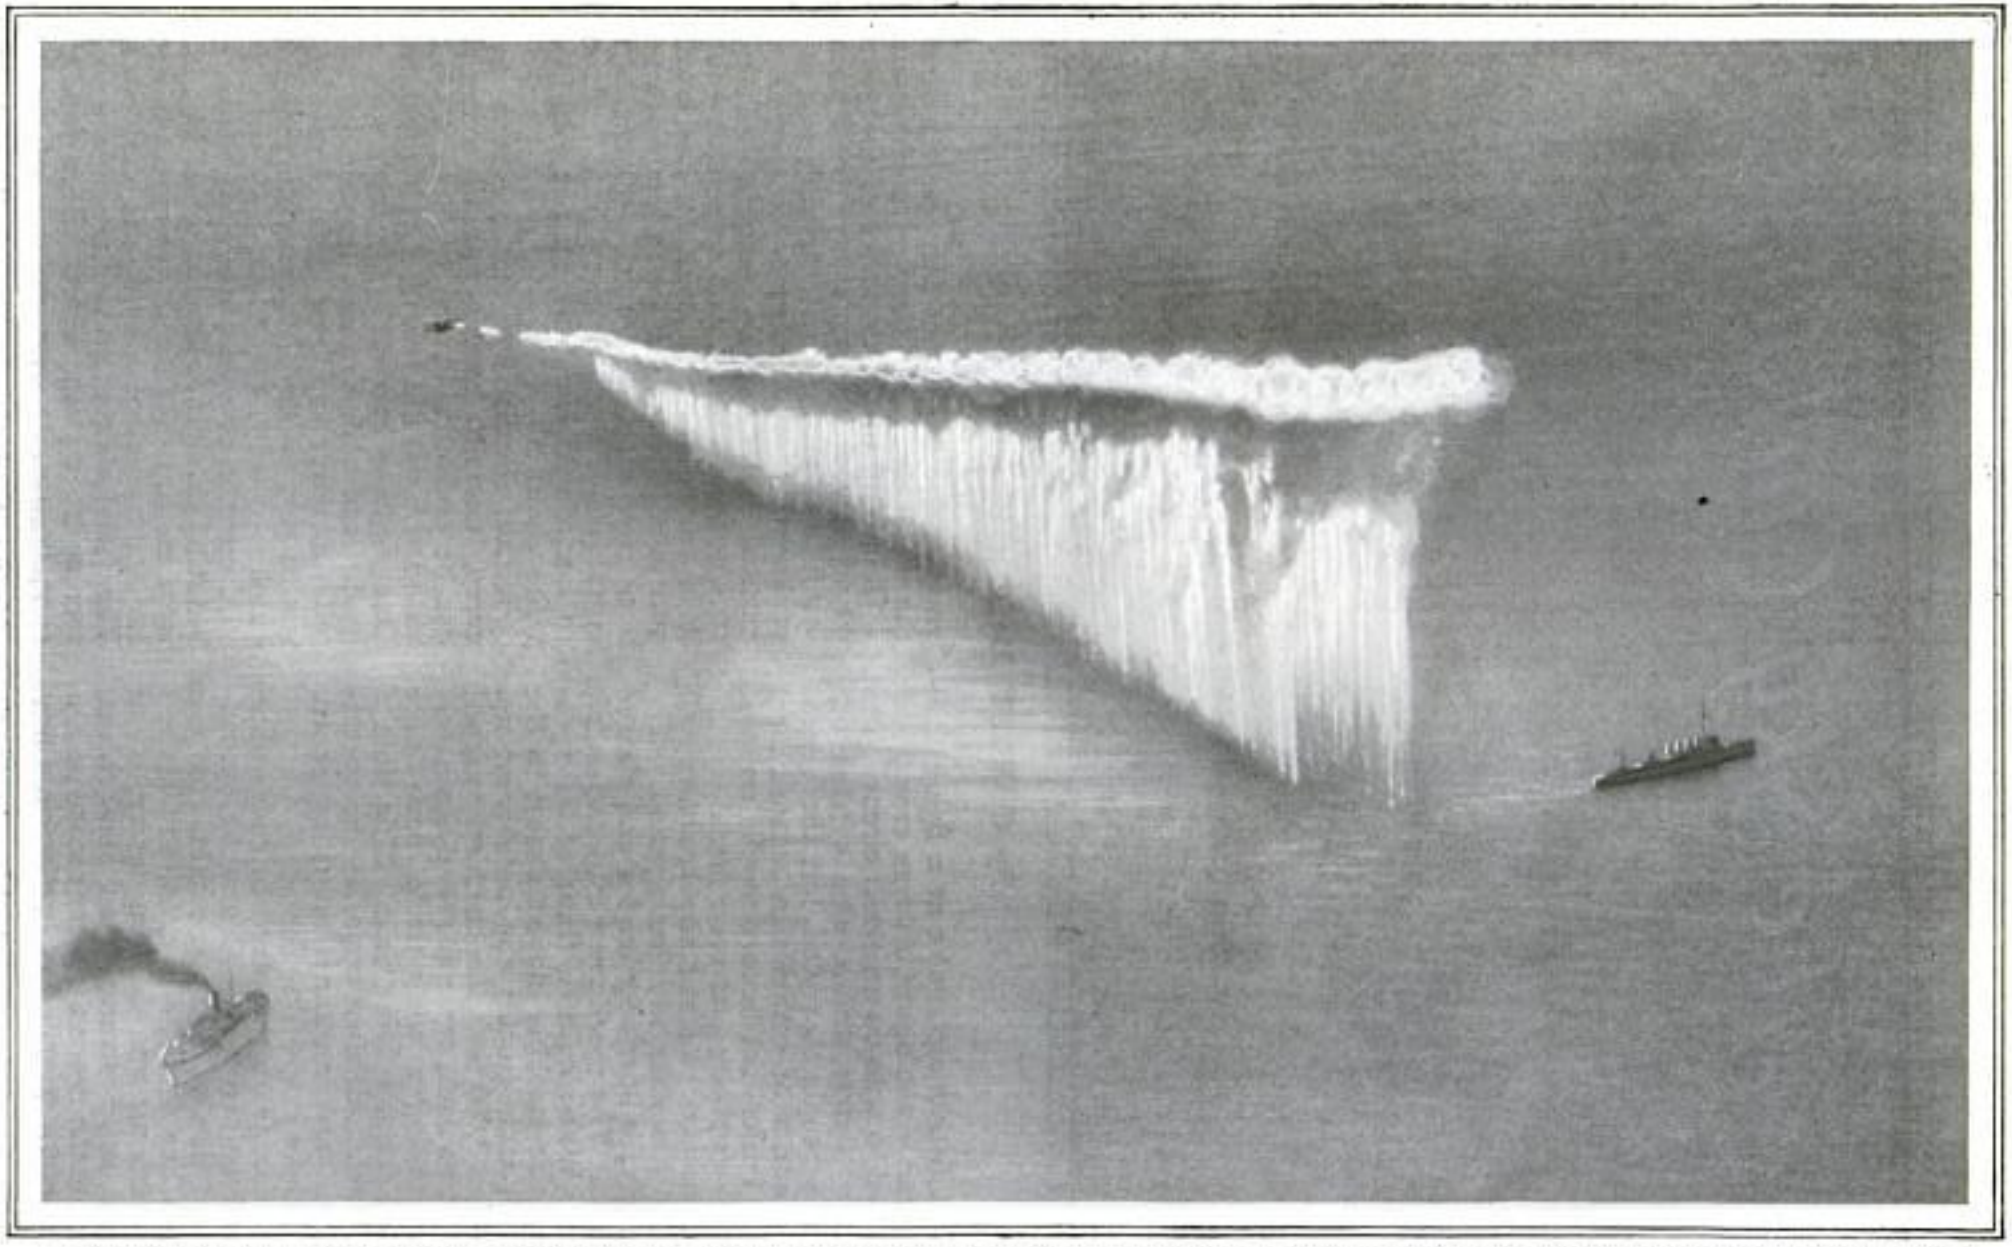

A Sky Curtain Laid at Sea, with One Airplane Weaving a Pattern of Dazzling White Tapestry around and through the Fleet of Battleships and Destroyers, Cutting Them Off from the Rest of the World

Copyrighted material

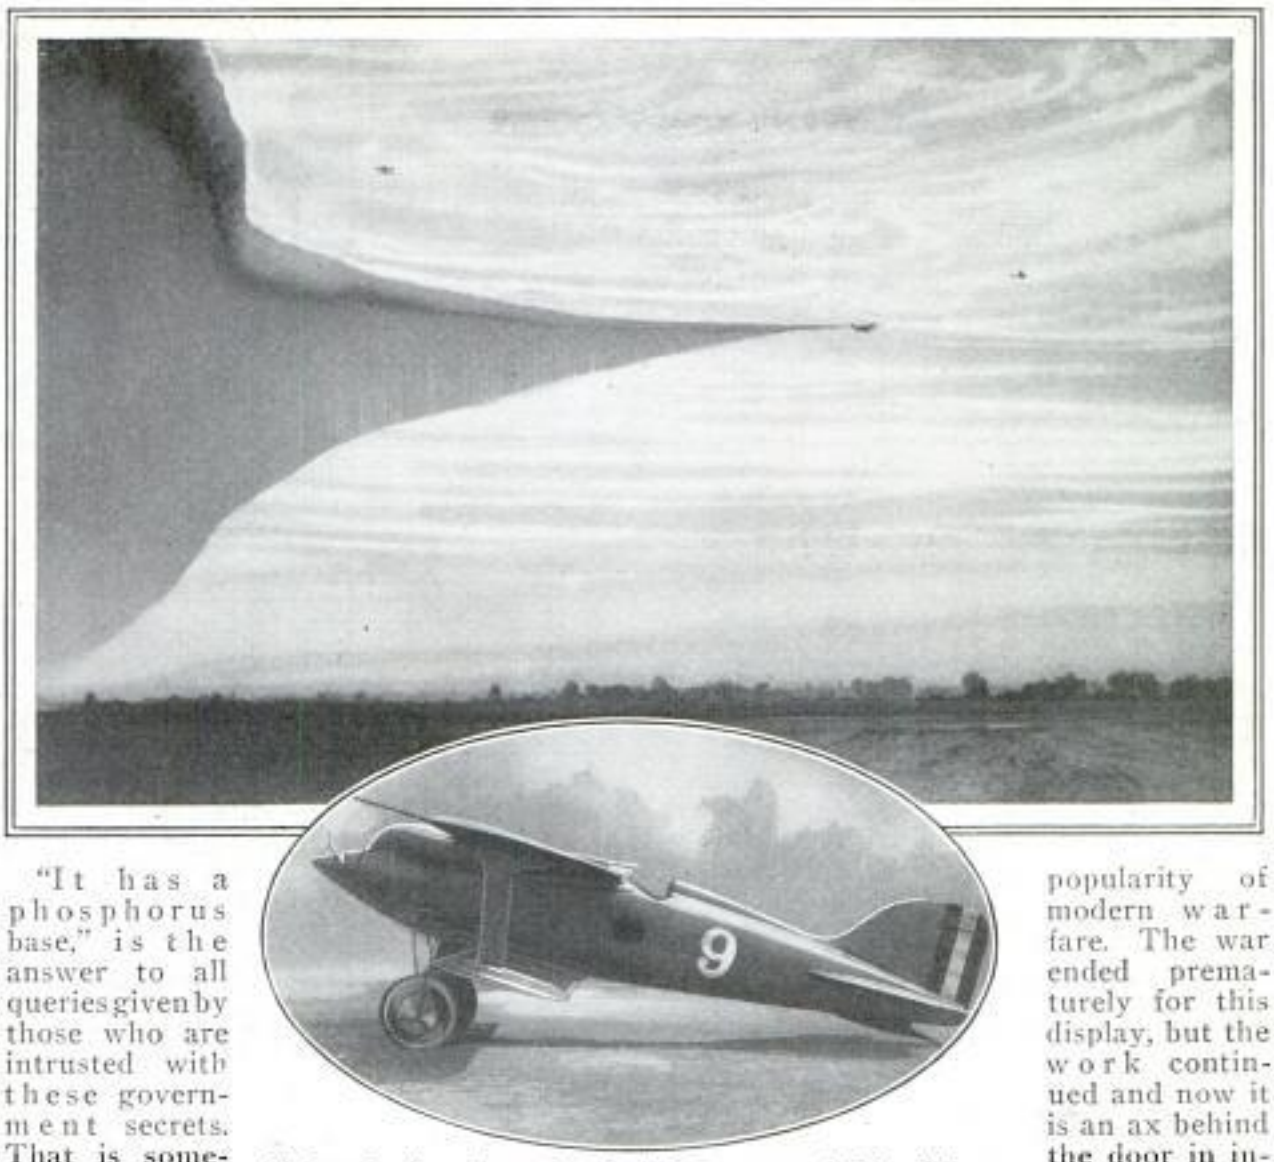

Airplane Laying a Protecting Black Screen across the Sky; Below, a Craft of the Kind Used to Lay the Curtain

"It has a phosphorus base," is the answer to all queries given by those who are intrusted with these government secrets. That is something, however, anybody who has ever studied chemistry could guess, and the answer is harmless as well as valueless. Some chemists will go so far as to name several of the other ingredients of the curtain mixture, but nobody is putting out the proportion of each element used and without this knowledge, an experimenter might well spend a lifetime trying to put them all together in just exactly the right ratio for a closely woven sky curtain. The big screen itself, when dropped, cannot be picked up and examined, for it would be like scooping fog on a London street, or gathering smoke in Pittsburgh.

If the screen has not been developed for pleasure, the only other excuse is business. Business is exactly what it is for —the business of war. When the Great War closed, the smoke curtain had not begun to be used to any large extent, but it was being worked upon, and chemists were sweating day and night in an effort to add this little contribution to the unpopularity of modern warfare. The war ended prematurely for this display, but the work continued and now it is an ax behind the door in international affairs. A few years after the war, some Englishmen began to use a sort of modified smoke screen that issued from an airplane through a special apparatus and made a long streak of black smoke which hung in the air. This was used to do skywriting for advertising purposes and is still used extensively.

But the primary object of the smoke screen was and is to conceal something. Battles have always been won by one commander having something up his sleeve that his opponents did not know about; in other words, a surprise. Nothing in the world can help put over a surprise in combat like one of these sky curtains. Heretofore cavalry has been used to screen movements of troops on foot, but horses going at a gallop are not one tenth as fast as airplanes, and besides, cavalry cannot shut off the view of observers stationed on hill tops.

The only way that a commander can see beyond a sky curtain is to get into an

Copyrighted material

3055

airplane and fly over it. Everything in future wars will probably be done behind one of these aerial tapestries. Batteries will be drawn up, reinforcements thrown in, attacks launched and retreats made under cover of the impenetrable smoke screen.

In making an attack under a screen, superior forces could be upon the enemy before he knew it, and a surrender would be the approved and conventional consequence. The enemy could shoot through the screen only at random, and batteries of heavy guns would be useless without the gunners being able to "spot" the shots. Of course, the thing would work both ways. The enemy could do all these things too and the winner would be the side that got around to the matter first. It will make war more a game of wit and agility than ponderous, expensive campaigns.

An airplane can fly through one of these curtains, standing up like a thin roll of absorbent cotton, without breaking it down. The propellers make a whorl in the white vapor and the path of the plane can be seen after it is through, but the mist closes in so it is impossible to see through it. It has been rumored a way to precipitate these curtains has been discovered in Europe. This would be to turn another airplane loose and have it attack a smoke screen by flying lengthwise just above it and drop chemicals that would disperse it. Something like this may be done. But the job of cleaning up one of these five or ten-mile screens would be an enormous undertaking.

One big feature of the curtain is its sticking qualities. It does not disappear like smoke in the wind but hangs for many minutes. On a still day, traces of it may be seen for an hour after it is dropped, and for about thirty minutes it makes a haze.

A new terror has lately been added to the smoke screen which makes its importance still greater. That is poison gas. When the curtains are laid, they stand upright, as stated, then fall to the ground. But they do not fall flat where they stand. They spread downward and become a blanket, and when this happens, the people on the ground are not only blinded but poisoned as well! So it is small wonder that attempts are being made to set up some kind of an international court where differences can be settled with speeches and a gavel.

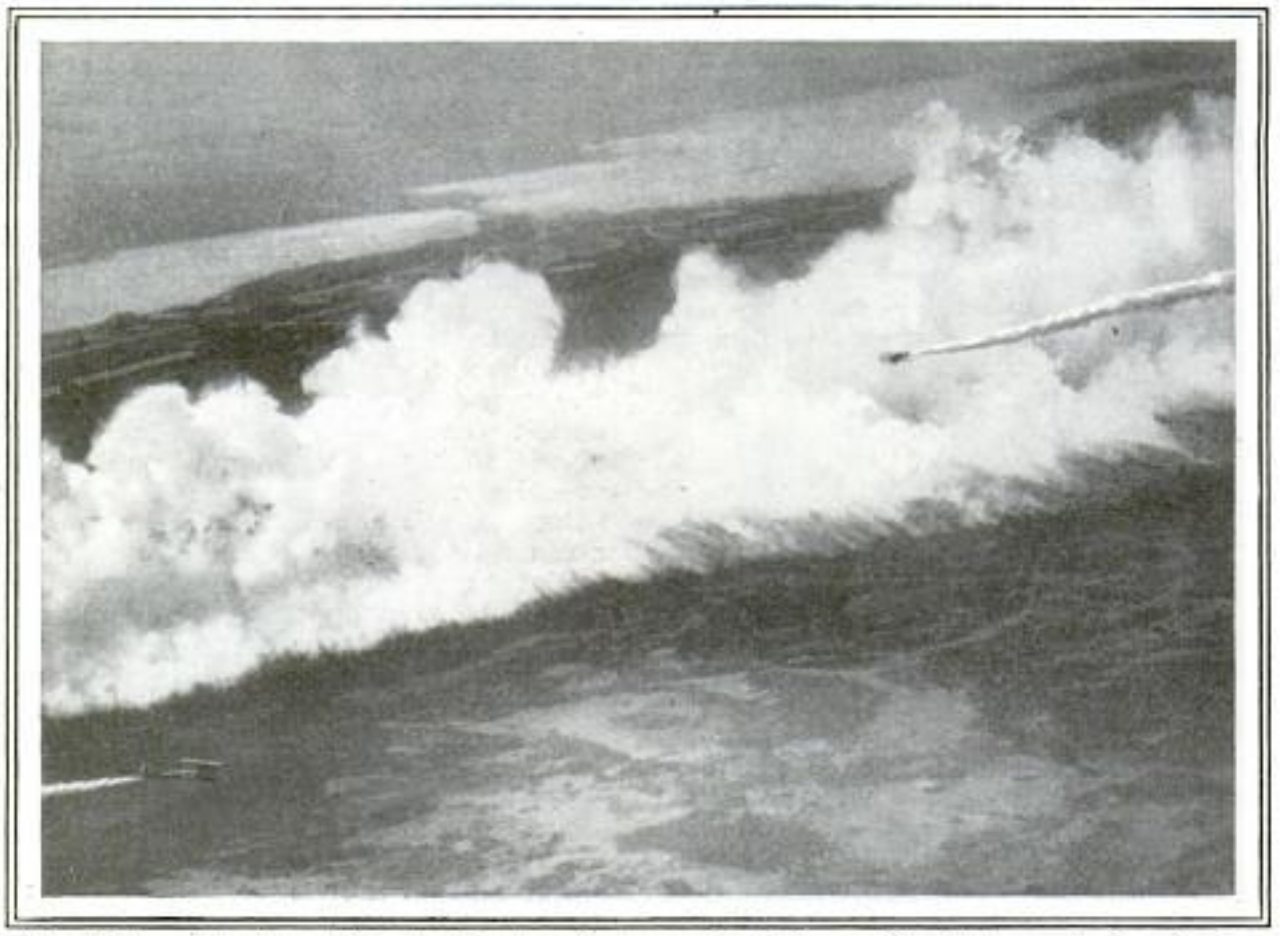

Two Airplanes Traveling in Opposite Directions Can Lay a Double Screen, One Falling as the First Begins to Disperse

Copyrighted material

GROWTH OF THE PATENT OFFICE IS SHOWN BY FIGURES

From a force of one clerk ninety years ago the patent office has grown until now it has 1,250 employes. During the past thirteen years as many patents were issued as were allowed for the first fifty-seven years of the department's existence, and in 1924, every state in the union and more than sixty foreign countries were represented among the masses of successful applicants. An average of 80,000 applications for patents is received yearly, and this government has issued about one-third of the 4,800,000 patents recorded for the whole world, the report says. A collection of 150,000 models is in possession of the bureau, although since 1880 they have not been required as part of an application except in unusual cases where mere pen work is not sufficient. Two fires, one in 1836 and the other in 1877, destroyed great numbers of the earlier models gathered in the bureau. The activity of modern genius resulted in loading the office with a waiting list of over 75,000 applications for patents, but by adding to the clerical force, this volume has been reduced to 52,000, handled at the rate of 2,000 a month.

PEARL SORTERS WEAR BLINDERS TO HELP IN COLOR TESTS

Pearls are subjected to many tests before their value is appraised, and one of the most important is the inspection of their color. To prevent mistakes in this examination due to reflection from other surfaces or "false" lights, the sorters sometimes wear blinders to shield the eyes and the gems. They are attached to the head by a band under the chin and extend close to the magnifying glass under which the pearl is scrutinized against a dark background. The true color and texture of the specimen are revealed and flaws more readily detected.

Pearl Sorter, Shielded by Blinders, Examining Gem with Magnifying Glass in Color Test

SPIKES AS TRAFFIC-LINE MARKS SAVE COST OF PAINT

Large copper-headed spikes driven into the pavement to mark traffic lanes, are proving a satisfactory substitute for paint in a western city. They are more durable and, once in place, need no attention. Wheels passing over them keep them bright, and they do not protrude far enough to hamper traffic.

Rows of Copper-Headed Spikes Driven into Pavement at Street Intersection to Mark Traffic Lane for Pedestrians

TIRES MADE TO ROLL FARTHER BY CHEMICAL RESEARCH

Chemists are saving the motorists of the country $50,000,000 a year on their tire bills and the manufacturers about $40,000,000 annually, it is estimated, by the use of organic "accelerators" in rubber so that vulcanizing can be done in from one-third to one-fifth the time formerly required. Largely due to other chemical discoveries, tires are now made to cover from 15,000 to 20,000 miles before they have to be replaced. Twenty years ago, the average running life of a tire was about 2,500 miles.

Copyrighted material

AUTO CAMPING TRUNK HOLDS BEDS AND TABLE

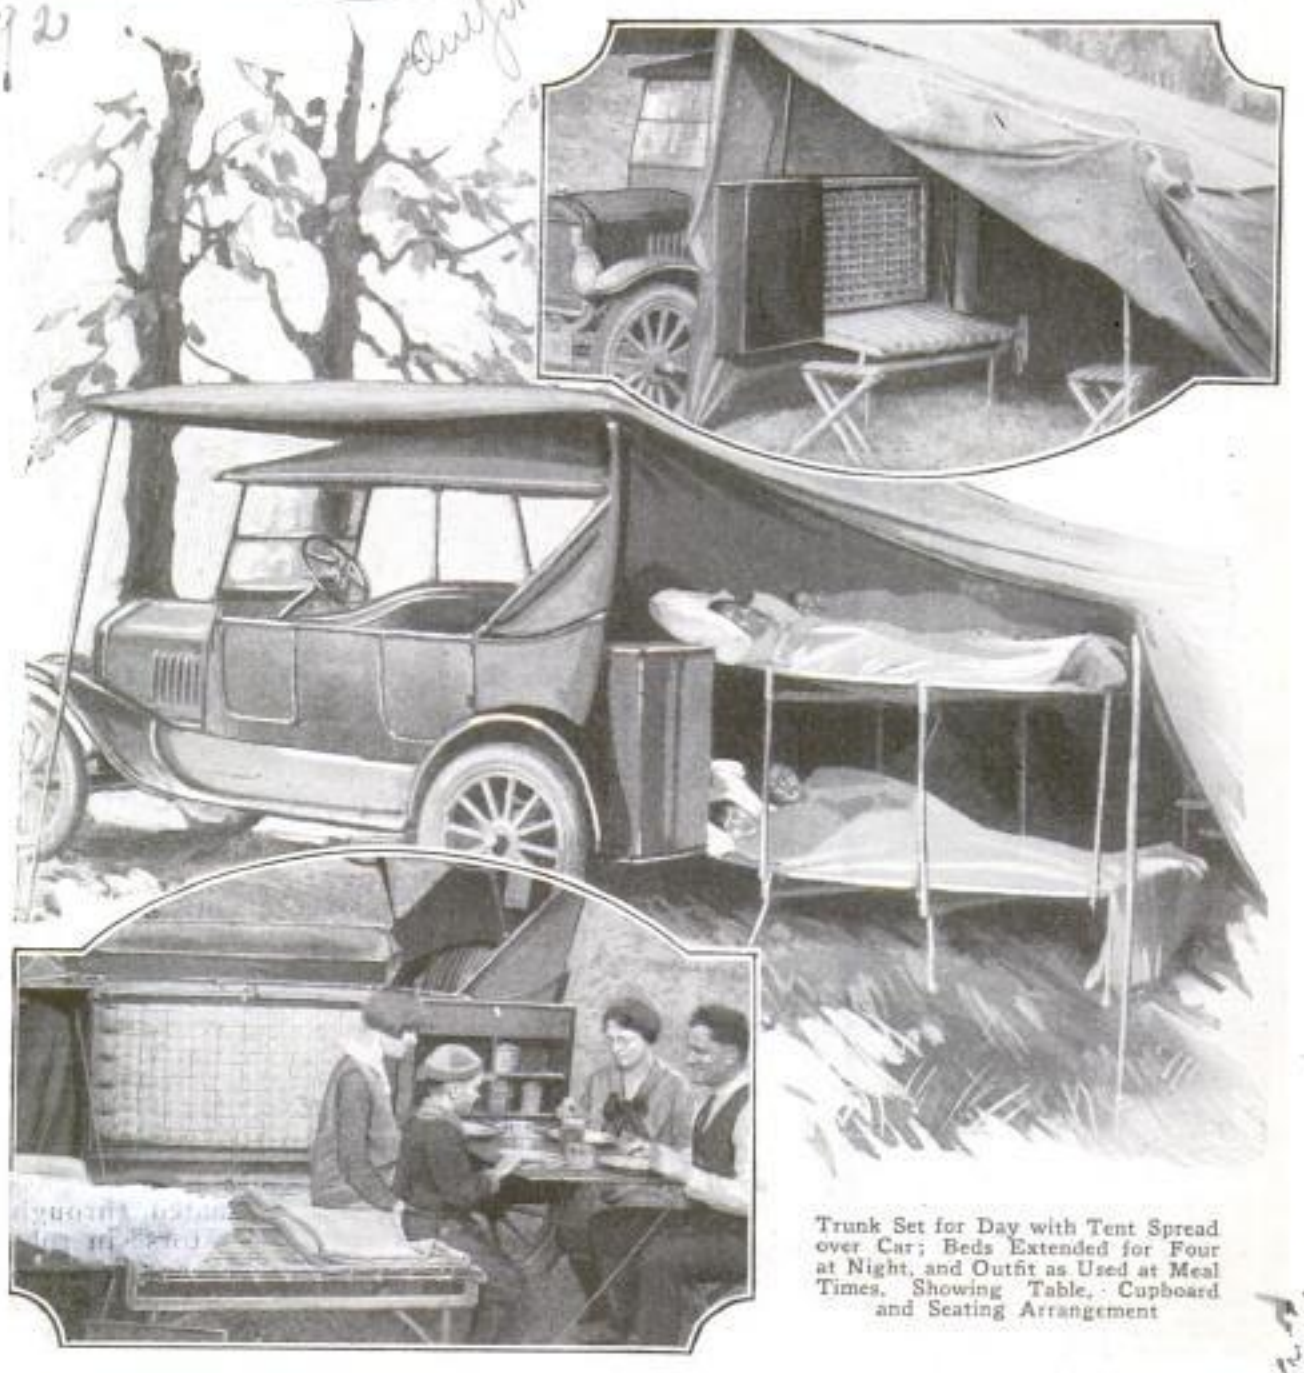

Trunk Set for Day with Tent Spread over Car; Beds Extended for Four at Night, and Outfit as Used at Meal Times, Showing Table, Cupboard and Seating Arrangement

Essentials of a camping equipment for four persons are carried in a folding trunk that fits the rear or the side of the automobile, weighs but 175 pounds when filled, and may be detached from the car or put into use without removal. It holds two double all-metal spring beds with pads, a frame for supporting a tent over the outfit, cupboard with space for a small stove, utensils and provisions, and a table, besides room for wardrobe and extra bedding. The trunk can be locked even with the tent over it, assuring safety when the tourists are away. The lower bed forms a seat and both bunks have strong legs. Since it is not necessary to remove the trunk, time is saved both in packing and unpacking.

FREAK CANES GROWN ON TREES BY TWISTING BRANCHES

To meet the increased demand for fancy walking sticks, French farmers train the branches of young trees to grow into grotesque shapes. Maple, birch, chestnut and ash are the woods best adapted to the purpose. At the end of the first year, the trees are cut short so that they produce new shoots at the bottom. These are twisted into various forms, secured by cords until fully grown and sometimes

Copyrighted material

carved while still on the trunk. Fresh trees are planted to insure constant supplies. The sticks are commonly sold for $1 to $20, but more artistic designs occasionally command $50 and even more.

STEEL BRACKETS FOR SCAFFOLDS

Steel braces that are attached to the wall with four nails and have two legs that rest against it to keep them from shaking, have been found practical for stucco and other construction jobs. They can be set up in much less time than is required for the usual wooden staging, are made of steel that will not bend, and fold up for easy carrying. They are manufactured in two lengths, three and three and one-half feet, weigh less than 200 pounds per dozen, and are said to last indefinitely if properly handled. A dozen or two of the brackets, it is said, will take care of the average stucco job.

Man at Right Is Wearing the Tiny Ear Phones Which Are Connected to Amplifier Apparatus in Box on Chair

MIDGET PHONES FOR THE DEAF FIT WITHOUT HEADBANDS

Persons who are partly deaf can hear almost perfectly, it is said, with a set of tiny telephone receivers operated in connection with two small microphones and an amplifier with two vacuum tubes. No headband is necessary as the phones, about the size of the end of the thumb, are fitted into a molding that conforms to the shape of the ear so that they can be held securely and without discomfort by the ear itself. The entire outfit, with batteries included, is portable and can be concealed with little trouble.

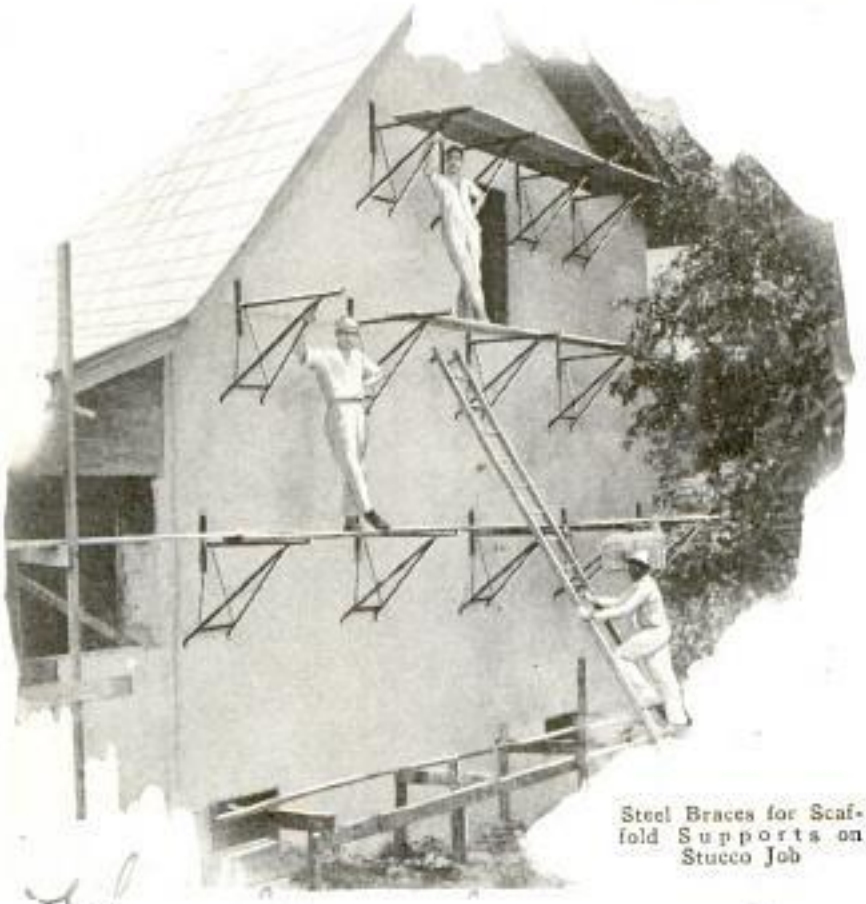

Steel Braces for Scaffold Supports on Stucco Job

PLANT TO COMBAT MOSQUITOES

By grafting shoots of cinnamon or cloves upon a plant known as "holy basil," a European botanist is said to have produced a shrub whose leaves render mosquitoes insensible within a few seconds after the insects touch them. The leaves are said to aid in combating malaria, while their use in the daily diet wards off certain diseases.

Copyrighted material

Inventor and His Camera That Takes Pictures of the Sun for Guidance of Aviators

CAMERA SERVES AS SEXTANT TO DIRECT AVIATORS

As an aid to aerial navigation a camera sextant has been invented by Lieut. Com. Maurice R. Pierce, navigator of the dirigible "Los Angeles." It serves the same purpose as the familiar instrument mariners have used for generations to find their location by the position of the sun, but it overcomes two problems that often harass the aviator particularly, a hazy horizon and the lack of time. In operation, it is pointed at the sun, the shutter is pressed, and in a minute, the negative can be developed in a series of rinsing and fixing tanks built into the sextant case. The film is then placed under a celluloid scale and the correct reading obtained to a fraction of a second of degree. Two spirit levels form a right angle about the finder enabling the operator to hold the camera level. The inventor expects to include an attachment that will automatically register the exact time when the exposure was made, and use of the camera sextant at night also is predicted.

HIDES TANNED BY ELECTRICITY TO SAVE TIME

By an electric process now in use in Germany, green hides are turned into finished leather in about one half the time required by usual methods, it is reported. The hides are soaked, scraped and prepared in the customary manner, then hung on rods in a pit containing the tanning liquid. At both ends of the vat are groups of electrodes. For eight hours, current is passed through the bath, driving the water from the fibers of the hides, allowing the preparation to soak through thoroughly. The skin resembles a squeezed sponge when it is taken from the pit and is in such condition that the next tanning material is absorbed rapidly.

SAILBOAT WITH TWO HULLS KEEPS BETTER BALANCE

Built upon two pontoons bridged together, a novel sailboat devised by Italian enthusiasts is said to have a safe speed of twenty-four knots in brisk winds, to keep better balance than ordinary models and to be practically non-capsizable. When one side rises clear of the water, the other remains securely on the surface. The pontoons practically act as outriggers, but do not interfere with handling the boat, and when the craft rides on a single float, head resistance is decreased, it is claimed, especially in rough seas.

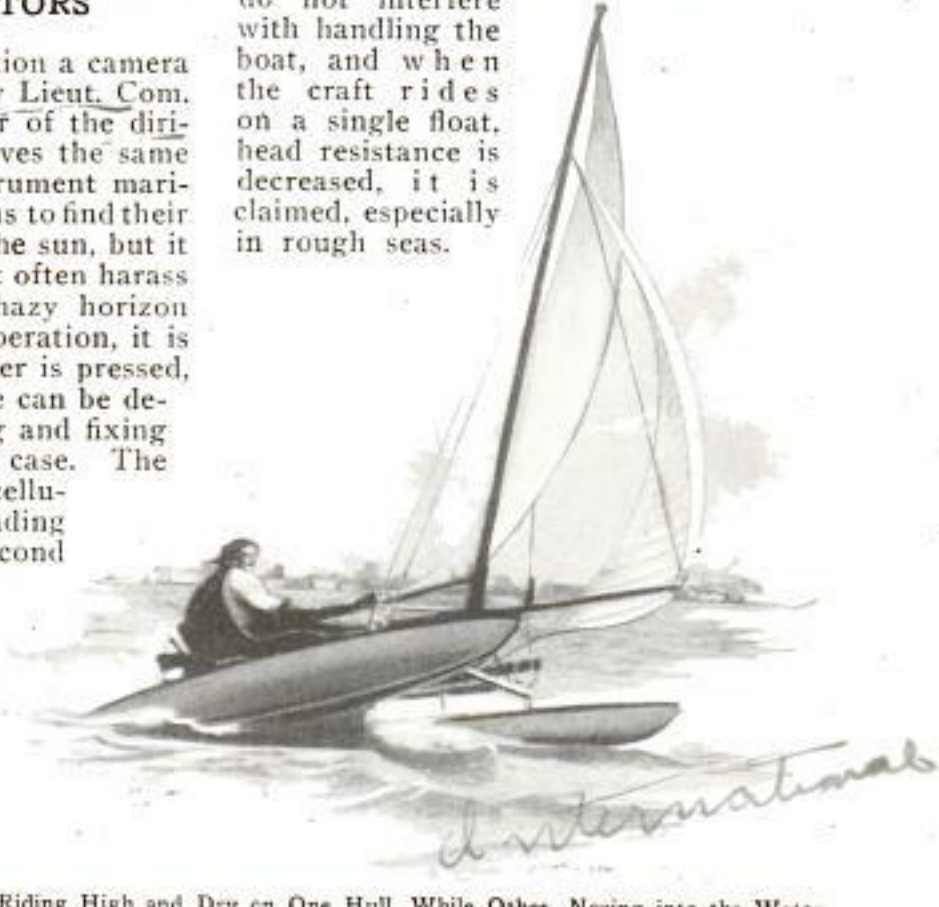

Riding High and Dry on One Hull, While Other, Nosing into the Water, Holds the Craft Steady

Copyrighted material

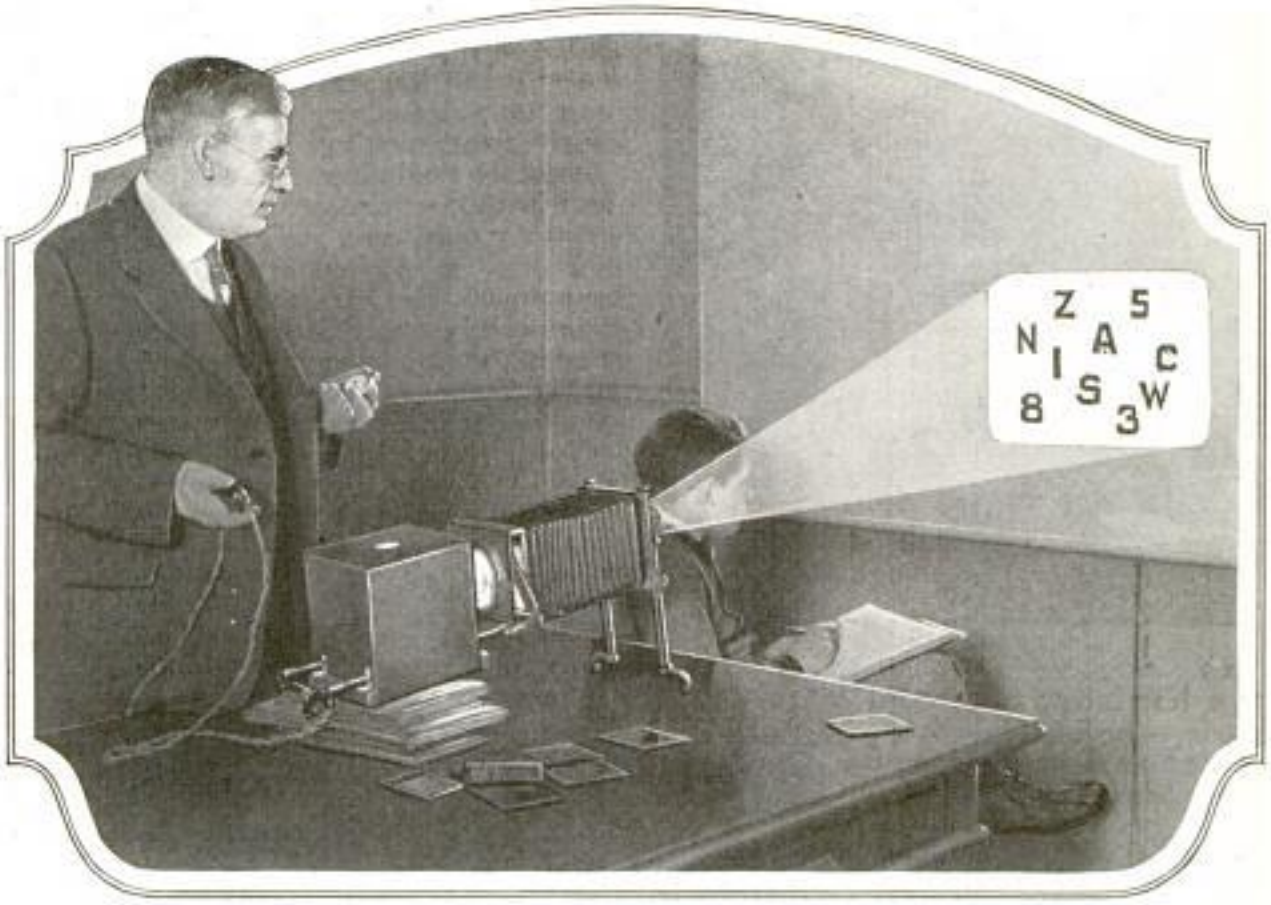

Testing Visual Memory: for Three Seconds, the Child Looks at the Slide. Then the Light Is Snapped Off, and He Writes Down as Many Letters as He Can Remember

How Much Musical Ability Have You?

Tests with School Children Show That Only One Out of Four Has Exceptional Ability and Many Almost None

By PAUL PADDOCK

BELIEVING that more money is wasted on music lessons every year than is spent on all kinds of technical education put together, instructors at Northwestern University are using a series of instruments to test musical ability. Between 4,000 and 5,000 grade pupils at Evanston, Ill., already have been given these examinations.

Only about one out of every four pupils taking the first five elementary tests from phonograph records, as devised by Prof. Carl E. Seashore, of the University of Iowa, it is said, showed marked musical ability warranting further diagnosis by means of the advanced examinations. The phonograph tests are designed, briefly, to show sense of pitch, time, rhythm and memory. They are given in the schoolrooms before the pupils go to the university laboratories. Fully half of the students get a grade between seventy-five and fifty. A fourth of the pupils make such a poor showing that the instructors believe they have practically no natural ability, and that, therefore, time and money spent would be wasted.

The advanced tests are given to one pupil at a time, under the direction of Prof. E. E. Jones, of Northwestern University, who has suited them to the purpose of finding out more about the child's musical gifts than can be discovered by the first tests, and if he has special adaptability to any one particular instrument. It is not claimed that the results of any of the tests are final, but they serve to weed out most of those who have little talent for musical development and to encourage those who have genius. Some pupils, it has been found, have eighty times as much ability as others. There seems to be little difference in talent between the sexes. For three years, a girl

Copyrighted material

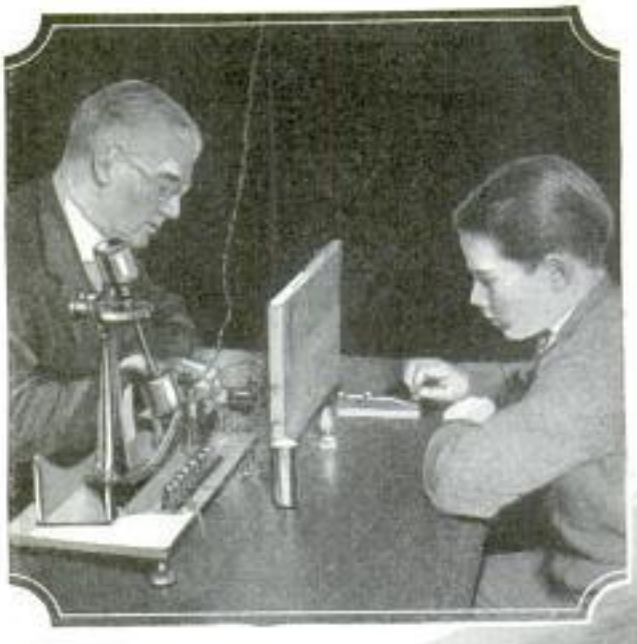

has received the highest grade. A boy has stood at the head for four years. The rest will have about the same average. Alertness and power of concentration are determined by a pendulum arrangement that shows the pupil's skill in terms of thousandths of a second. The child sits at one side of a table before a tiny electric light and puts his hand on a telegraph key. Opposite him is the examiner, an experienced assistant to the director. "Get ready," says the instructor. As he speaks, he pushes a switch, the little light flashes at the same instant, and the pupil's object is now to press the telegraph key. This halts the pendulum at a figure that shows just how much time has elapsed between the flashing of the light and his touch on the key. Next, the subject is blindfolded so he cannot see the light or watch the examiner, and is told to press the key as soon as he hears a buzzer that is set off the instant the pendulum is released. With the blindfold still on, the same process is repeated; this time a tickling sensation on the finger made by a little steel bar that vibrates rapidly, being the signal to touch the key. There is no way to "beat the gun" in this test, for if the child presses too soon, nothing will happen, since the pendulum must be released by the examiner who controls the starting.

Another pendulum test awaits the student in the next room. This shows, by a written record on a strip of waxed paper, how well or how poorly the pupil can keep time. His errors are shown in fiftieths of a second. Each child gets twenty chances at this, ten with the help of a buzzer that sounds as the pendulum ticks off the seconds, and ten without the buzzer, to see if he can keep the rhythm unaided. The subject is blindfolded and tries to press a key in exact time with the swing of the pendulum that passes over a little cup of mercury, completing an electric circuit to the registering apparatus where a small needle makes a jagged nick in the line that is traced on the paper. The child's signals on the key also are shown in a dent on a line opposite, and

Measuring Subject's Quickness in Response to a Light, a Buzzer and a Tickler

Copyrighted material

the space between the two lines is filled with a wavy tracing from a third needle that makes fifty curves to each second. If a perfect record has been made, the pendulum dents and those of the key will be exactly opposite each other. Differences are easily counted by the wavy lines. This is considered one of the most important of all the tests, as keeping time is highly essential. Occasionally, the experiment enables the examiners to pick the instrument best suited to the child. An exceptionally good record at the rhythm test indicates that the drum is the piece the child should try to master, especially if other tests show indifferent records.

From this device, the pupil moves to another table where he taps an electrically charged steel plate with a metal pencil, each beat being registered on an electric counter connected in the same circuit. The examiner holds the stop watch on the candidate in this race, and at the end of half a minute, the counter dial will show how many times the pencil has touched the plate. A free arm and wrist movement with right and left arms is required. This experiment shows, the scientists say, how fast the brain can send out impulses and how rapidly the muscles can act. They believe that the same apparatus could be adapted to testing athletes, runners especially, by showing how fast they could move their legs. On this same instrument, the child's dexterity is tested. Just above the tapping plate are three holes, set in the form of a triangle. The object is to put the pencil into each one of the holes successively as many times as possible in half a minute. Contact of the point at the bottom of the hole moves the counter so that the score is easily computed by the examiner, who again calls time with his stop watch. A good showing at both of these tests is held to indicate a natural ability toward the violin or other string instrument.

An ordinary wire and drill gauge has been adapted to a precision test that shows how steady the pupil's nerves are and how carefully he can perform a hand movement within a restricted space. The gauge is on a block of wood and is elec-

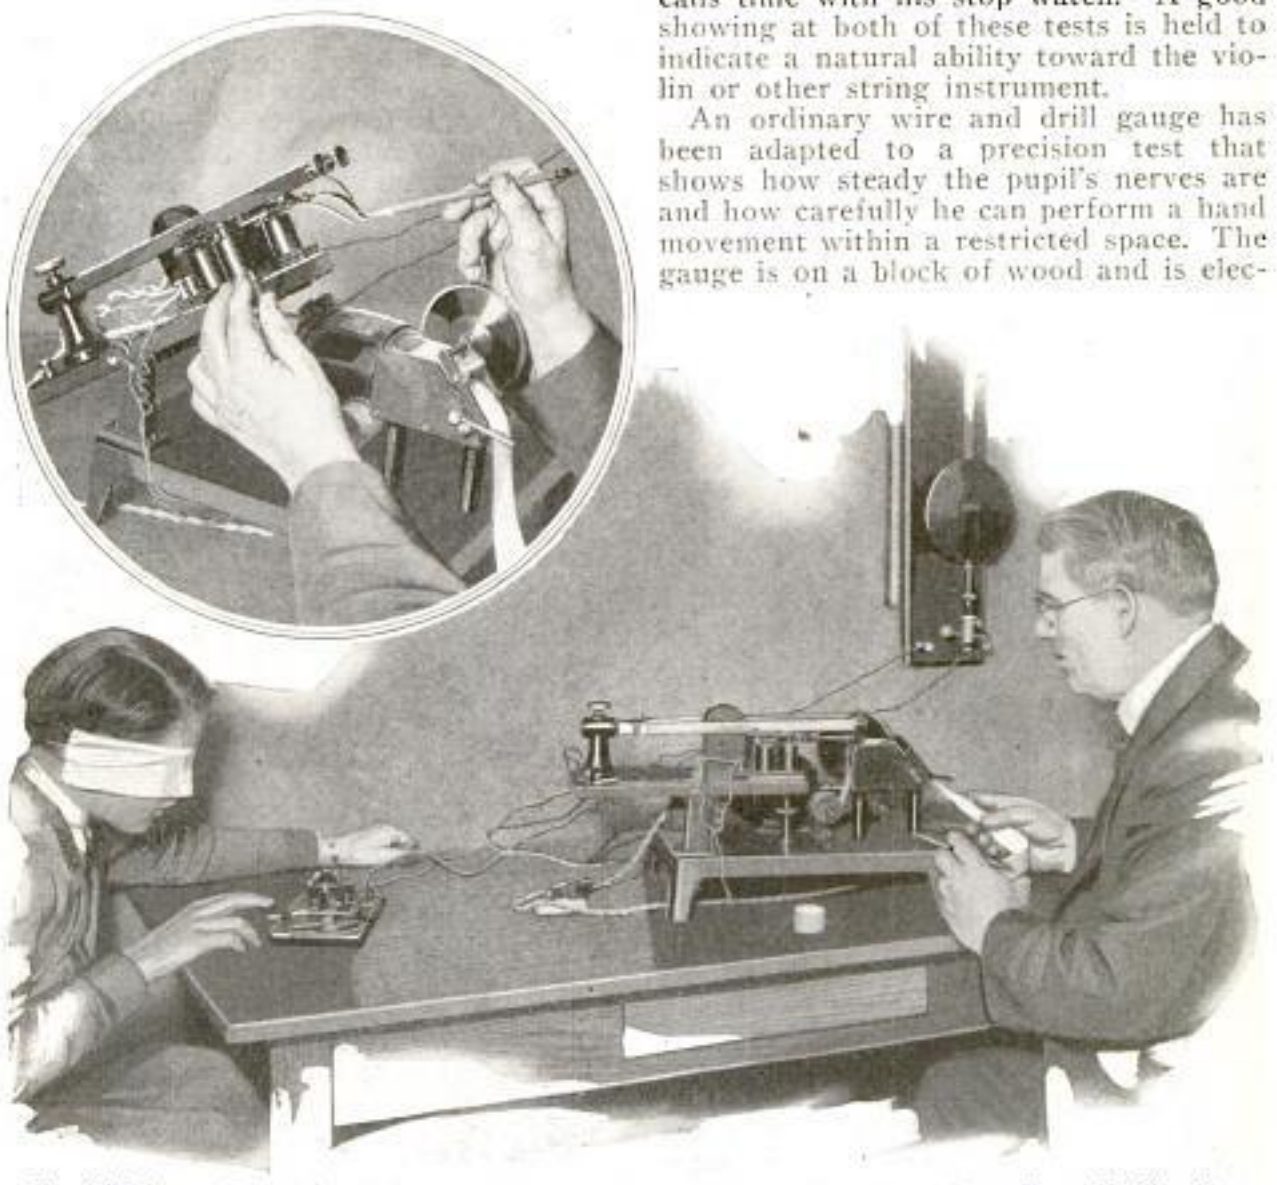

Keeping Time to Pendulum's Swing by Pressing Key Tests the Sense of Rhythm; Inset Shows Needles That Register the Beats and Errors in Fiftieths of a Second

Copyrighted material

trically connected to a buzzer. The child is given a steel-pointed pencil and told to insert the point in each of the holes on the gauge without touching the metal. If the pencil strikes the sides of the holes, the buzzer sounds and the test is over. Speed is forgotten for the time being, but the pupil is supposed to average about one hole a second. The larger openings are attempted first, progressing to the smaller ones where the chances for "going into the rough" are greatly increased. A score of eighteen or twenty holes is considered good.

After these exacting tests, the pupil is given a three-second picture show. A slide is thrown upon a screen from a stereopticon which can be turned off and on by an electric switch held in the hand of the examiner who keeps track of the time with his stop watch. There are ten objects on the slide, numbers, figures or, perhaps, pictures of animals. The child is told to look intently at the screen and at the end of the three seconds, when the picture is snapped off, he must write down the names of all the objects he was able to identify and remember. This is the visual memory test, to gauge the candidate's probable ability at reading music. Many children fail to learn to play an instrument because they have trouble coordinating their fingers in response to the visual impulses they receive. If this is a weak point, it is likely to be revealed in the next test which is performed with a flat board in which are set differently shaped wooden blocks. These are removed and stacked in three piles. At the word "go," the child races against the stop watch, trying to fit the insets into their proper places. The world's record was made in five and three-fourths seconds by a young woman. Almost anyone can construct this apparatus, and time can be measured closely enough for ordinary purposes with a plain watch. A strength test of wrist, hand and fingers on a dynamometer, a grip with a spring in it that moves a pointer to a figure on a dial showing the amount of pressure exerted, completes the experiments. The results, which are graded on the basis of 100, are recorded for the guidance of teachers and parents. That the tests have practical value is indicated by the creditable records being made by those who have passed them and are taking further courses in music. The percentage of failures among them is said to be negligible.

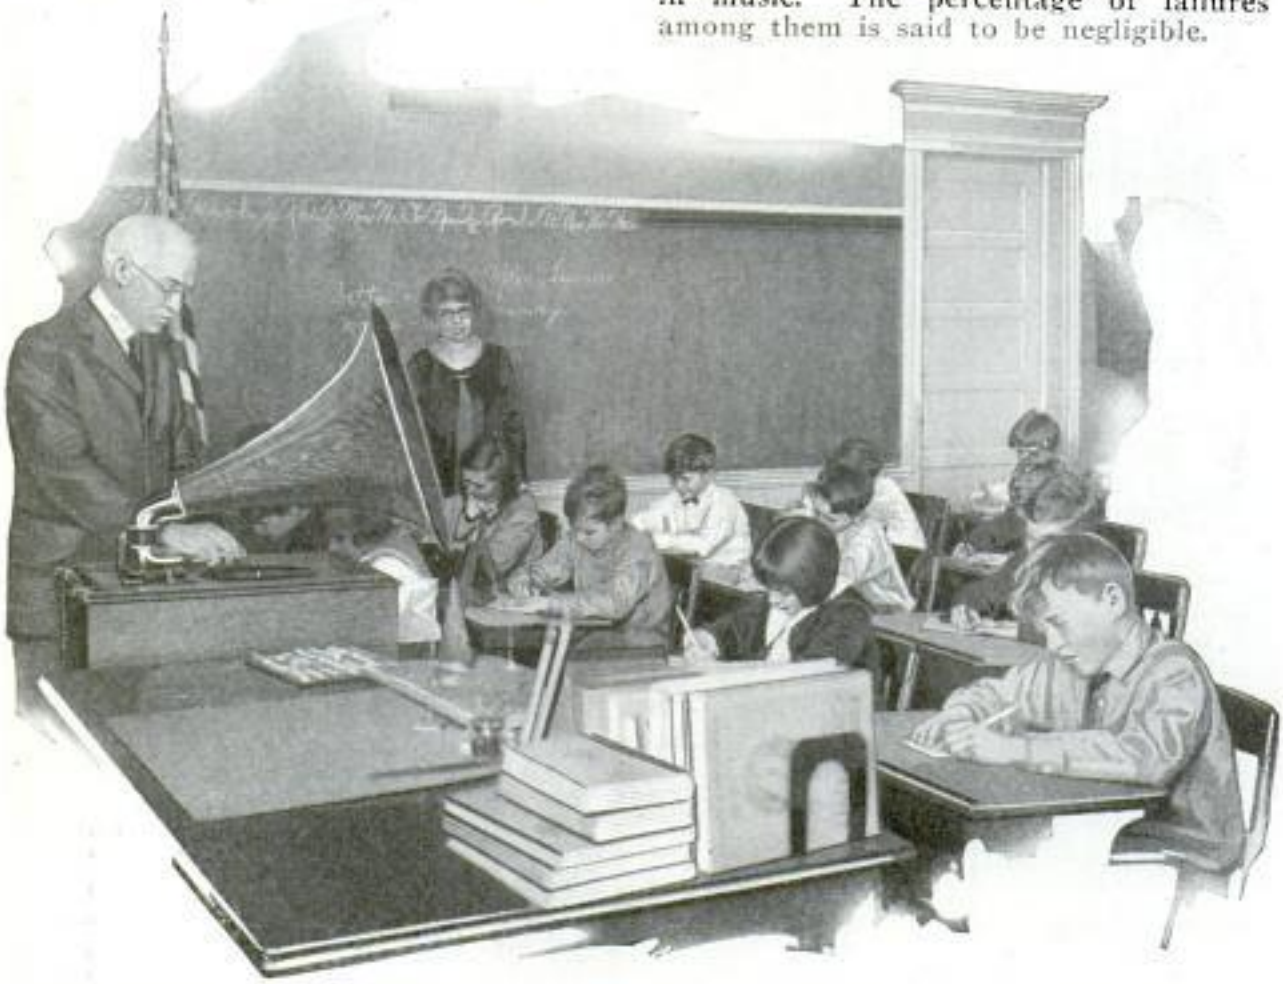

Giving Elementary Tests to Schoolroom Groups from Phonograph Records; Only About Twenty-Five Per Cent of Pupils Get High Enough Marks to Warrant Taking the More Advanced Tests

Copyrighted material

Fitting Blocks into Insets Tests Ability to Co-Ordinate Movements

Strength of Grip and Fingers, Essential in Playing Some Instruments, Is Measured on This Dial When Handle Is Squeezed

Tapping Test Indicates Skill at Rapid Movement with Arm and Wrist; Right, the Dexterity Event, Trying to Put Pencil in Small Holes without Touching Metal

Copyrighted material

METAL "PULLMANS OF THE AIR" PROVIDE LUXURIES

What will the magic metal, duralumin, the lightweight alloy of which the dirigible "Los Angeles" is constructed, contribute to the success of the commercial airplane? The question has arisen with test flights of two eight-passenger, all-metal monoplanes of this substance, the forerunners of a fleet of seven ships to be used in regular hourly service between Chicago, Detroit and other cities. Each plane weighs less than the ordinary limousine motor car, and more than 1,000 pounds less than other similar types of aircraft with the same engine. They have a wing spread of fifty-eight feet, are forty-five feet long and have a 400-horsepower Liberty motor. The exterior surfaces of wing and fuselage are corrugated. One of the planes, on a trial flight, carried a load of 2,379 pounds, climbed the equivalent of a mile in twelve minutes and made 116 miles an hour on a straightaway course. The cabins have comfortably upholstered chairs and the two rear-seat pairs fold together to form benches on the side so that card games can be played if passengers tire of the scenery on long trips. Meals can be served on these improvised tables from a small galley in the rear. The engine is muffled to minimize noises, radio sending and receiving sets are carried, there is space for mail, and instruments in the cabin show how high and fast the plane is flying. Bulkheads between the passengers' and pilot's compartments protect the occupants from sound and vibration. For winter flying, openings to the main cabin from the engine room furnish heat in plenty even for zero weather, and in summer cooling is obtained through window ventilation. Baggage is carried in a wing compartment.

Courtesy Stout Metal Airplane Co.

Will Planes like This Dot Our Skies in the Commercial Flights of the Future? One of the All-Metal Ships for Airline between Detroit and Chicago

FIRE PUMP RUN BY AUTO WHEEL PROTECTS HOMES AND WOODS

In a few moments' time, the automobile may be converted into an effective fire engine by means of a portable pump that is operated by a belt around one of the rear wheels of the car. It is said to have a lifting capacity of twenty-four feet through a one and one-half inch suction hose, and to deliver a stream strong enough to combat a house or barn fire through 2,000 feet of hose. No

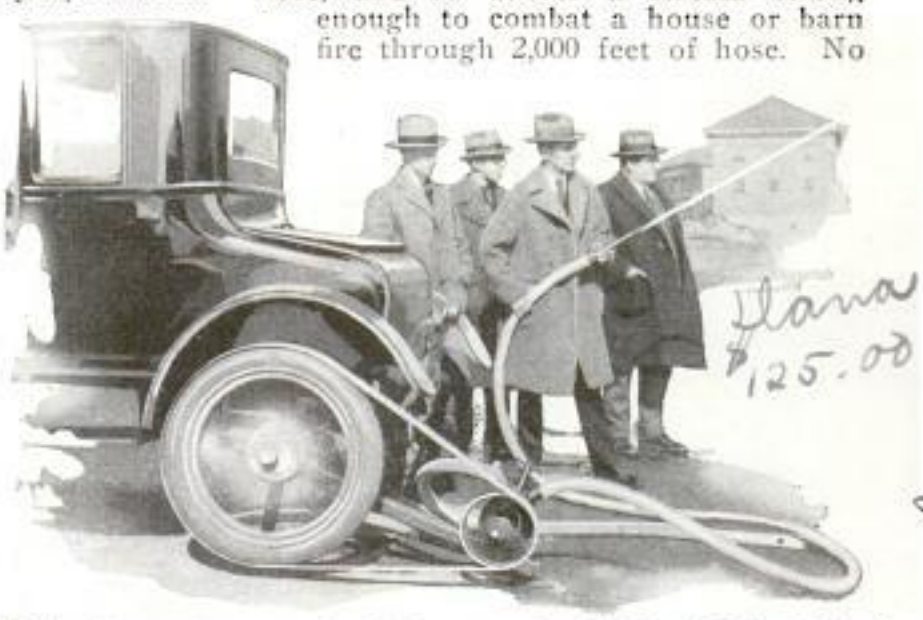

Testing Pump's Power at a Special Demonstration; This Is the Entire Outfit Including Feed Pipe and Spray Hose

priming is necessary. The outfit is also useful for pumping out cellars and swamps, filling tanks, flushing sewers and many other purposes such as fighting forest fires and protecting small villages that do not possess larger equipment.

AUTOS AND ROADS WORTH AS MUCH AS RAILWAYS

That the motor transportation industry in the United States is now larger than the railroad business is indicated by reports from the federal bureau of public roads and the national automobile chamber of commerce. The value of the more than 17,000,000 motor vehicles and auto roads together is placed at about $15,000,000,000, practically as much as our railroads, while there are 450,000 miles of surfaced rural highways, nearly double the total railroad mileage. The motor-car industry employs 2,750,000 persons, about 1,000,000 more than the railroads. In 1923, motorists spent over $6,000,000,000, close to the gross revenue of the railways.

AUTOMATIC SAW FILER IS RUN BY HAND OR MOTOR

Saws are sharpened quickly and accurately in an automatic filer that can be operated by hand or by motor and requires little skill. The saw is clamped securely in a holder and each tooth is given an exact edge by a swinging file fixed to a carriage that advances automatically. An even job is the result and the saw can be set correctly or new teeth filed much more easily than in the ordinary way.

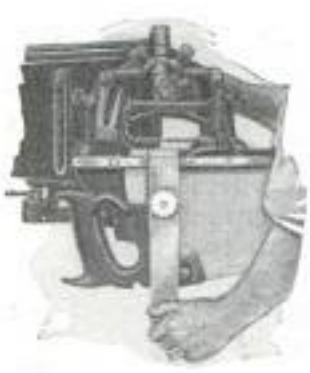

When It's Noon in Baltimore, What Time Is It in London? On Bright Days, This Many-Sided Sundial Will Tell

SUNDIAL WITH SEVERAL FACES TELLS WORLD TIME

A unique sundial in Baltimore, Md., has several faces set at different angles, so that the indicators register the time for the principal cities of the world. Each unit has been carefully adjusted to afford the greatest possible accuracy and besides the time, the latitude and longitude for each locality are engraved on the dials.

WHAT CAUSES HOLES IN CHEESE MYSTERY IS SOLVED

Experimenters in the department of agriculture are reported to have discovered that special curing processes and preparation of the curd, cause the holes in Swiss cheese. The product is now being supplied to employes at a cost of about twenty cents a pound for materials. The expense of the experiments, which were started nearly ten years ago, is being recovered by the sale of the cheese. The demand for it is so great that orders are rotated according to a system which permits all employes to make purchases.

Copyrighted material

TRACTOR FOR SCOOPING SNOW DIGS AND LOADS DIRT

Snow is removed at a saving of time and cost with a tractor outfit that scrapes the street, hoists the load and carries it away in almost one continuous operation. The same apparatus is suited to moving dirt in back-filling and similar operations, such as digging ditches, and a crane attachment may be used in place of the scoop to lift loads up to 2,500 pounds. No counterbalancing is necessary since the weight is evenly distributed between the front axle and the pivot pins located near the rear.

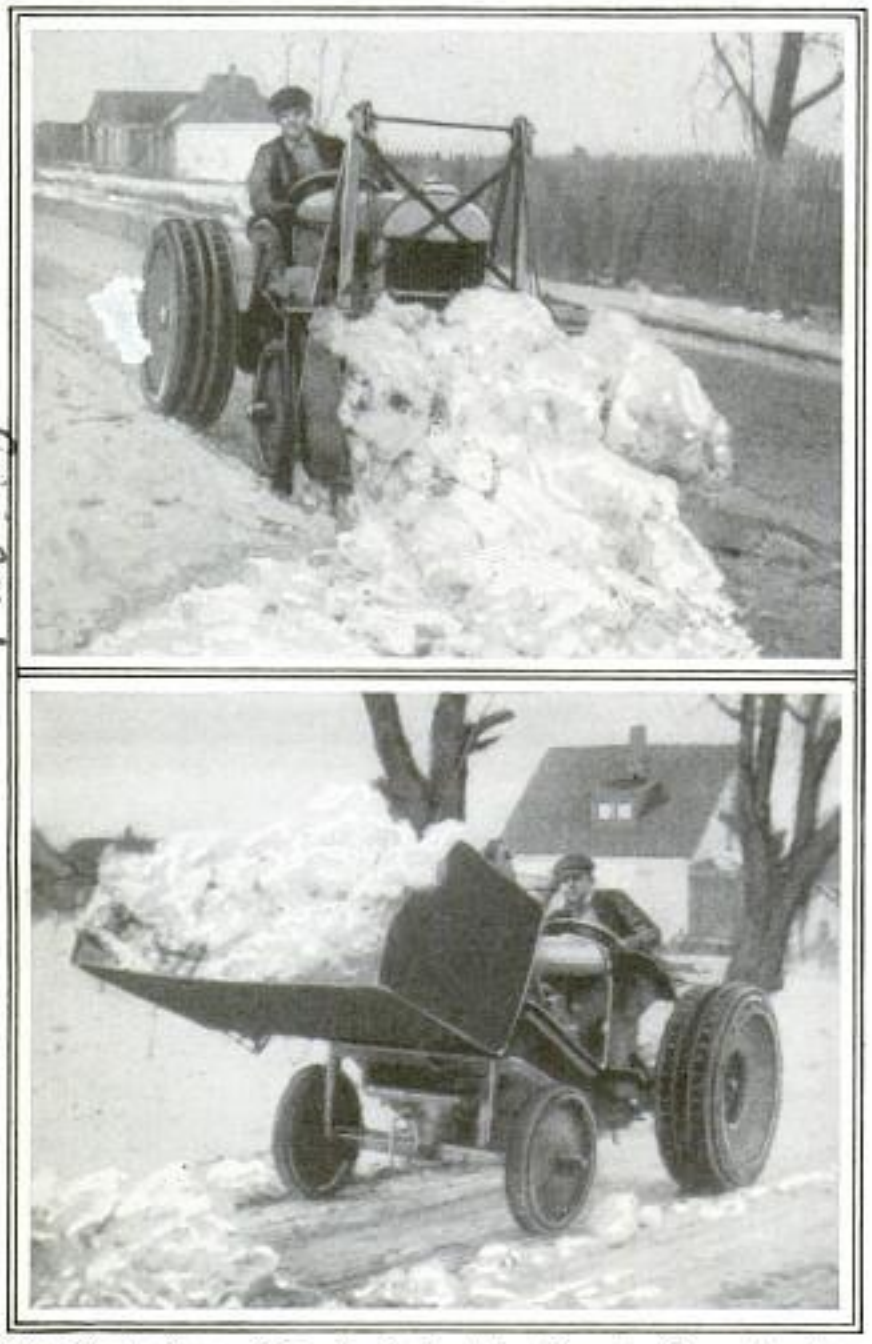

This Tractor Scoop, Originally Designed for Removing Snow, Has Been Found Equally Efficient as a Scraper and Back Filler

ELEPHANTS HELP HUNT BIRDS FOR MUSEUM SPECIMENS

Capture of two specimens of the nearly extinct pink-headed duck for the museum of natural history in New York, illustrates how difficult it is to catch such rare birds as these and how skillful many of the species are in evading the hunters. Elephants are needed in pursuing this particular duck, as it haunts the thickly overgrown swamps of upper Bengal where a man on foot cannot travel. It was one of the objectives of the Vernay-Faunthorpe expedition into India, but the members did not get sight of the bird after prolonged search. The specimens were finally caught by a native hunter. Another rare and shy bird is the helmeted hornbill. Scientists say that trained monkeys would be needed to catch it, as it lives in high forests, eats fruit and does not descend to the ground. One might almost believe it realizes that it baffles the hunters, for pursuers have heard it utter a series of derisive whoops, followed by a loud cackling laugh. This strange bird gets its name from its heavy bill surmounted by a high helmet-shaped top, the front portion of which is solid bone. Various species of pheasants are becoming extremely rare. One of the most elusive is a variety found in Annam which has eyelike spots on its feathers like a peacock. It was finally identified from four detached feathers sent to a Paris museum. The bird itself remained a mystery for several years, but a live specimen was finally captured in Indo China.

¶At the Hawaiian volcano observatory, an average of seven or eight earthquakes are recorded weekly.

Copyrighted material

2294

Martyrs of Science

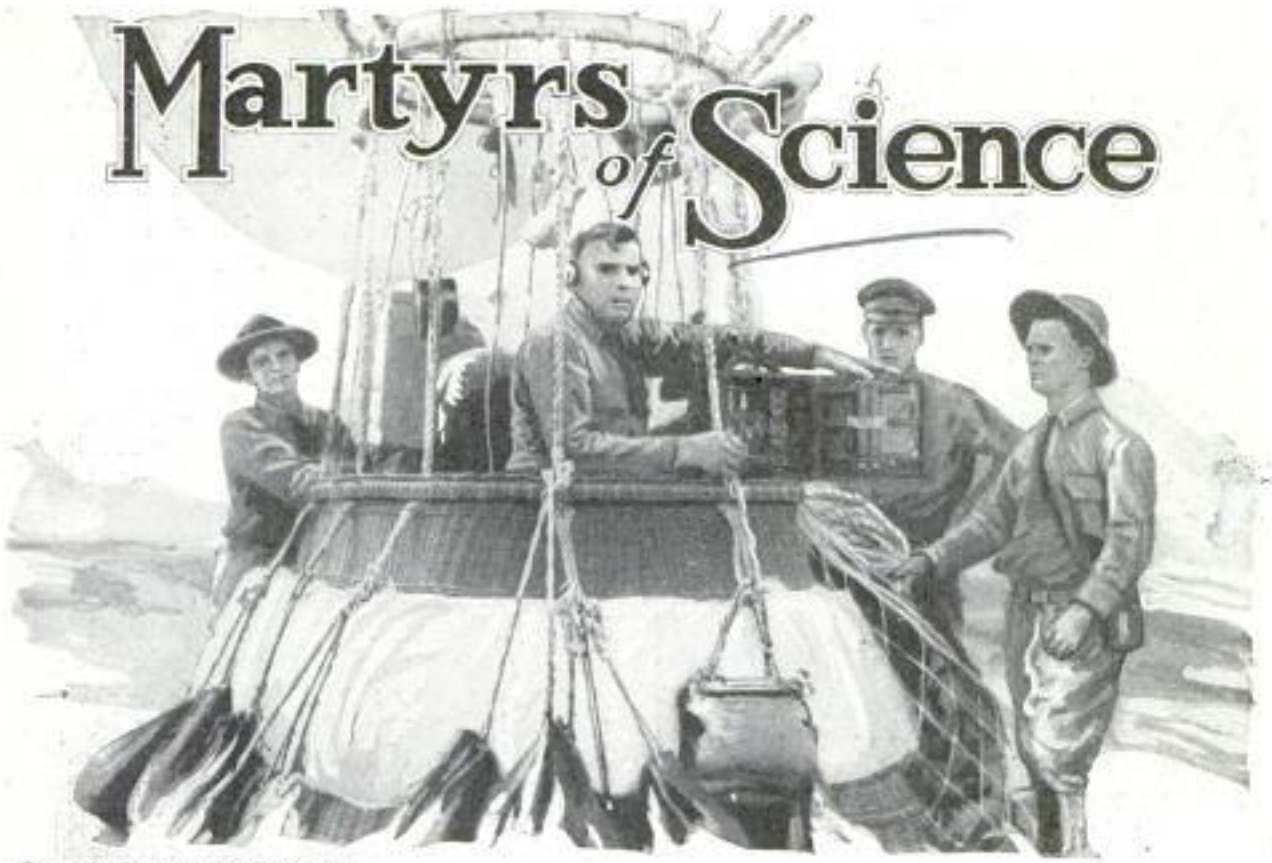

Copyright, Underwood & Underwood

Lieut. John Choptaw Receiving His Wireless Set in the Basket of His Balloon Just before Start of Fatal Flight in Which Lightning Struck the Big Gas Bag

Scores of Lives Deliberately Risked and Sacrificed in Pursuit of Knowledge to Protect Others from Disease and Death

A FEW lines tucked away in odd corners of the daily papers recently announced that Dr. Kohler, of Berlin, internationally known for his X-ray research work, had submitted to amputation of his right arm in an effort to stay the progress of deadly burns from the mysterious rays. A few days earlier, the papers reported the amputation of a French scientist's hand for the same reason, and in the same month an American experimenter suffered a similar loss.

Only a few weeks before the papers announced that Prof. J. Bergonie, a famous French savant, had succumbed to radium burns after his right arm and three fingers of his left hand had been amputated to stay the strange malady. The next day the chemist Demenitroux, of Paris, who worked with the late professor and Madame Curie in discovering radium, died.

Just a few more martyrs to the cause of science, the tragic fate of the five, all coming within a space of less than four months, has focused attention anew on the men who give their lives in research work, and the untold hosts who take the same risks, but escape the consequences.

The same week that Prof. Bergonie and Demenitroux died an American, Dr. W. J. Baerg, of the University of Arkansas, returned from the Panama canal, where he had gone just to let the most deadly centipedes, scorpions and tarantulas of the tropics bite him, so that he could observe if the effects of their poison were fatal to man. He returned safely.

Records of American colleges, the public health service and the Rockefeller Foundation investigations are full of similar sacrifices, some fatal and some, as in Dr. Baerg's case, not. When Dr. Walter Reed made his great discovery that the mosquito carried the yellow-fever germ, and called for volunteers from the American troops in Cuba to prove it, enlisted men crowded forward to be inoculated, but, he recorded, when he explained that he would see that some adequate compensation was forthcoming for them, they all drew back and declined to submit to the experiment if they were to receive any money gain from it. That is the spirit which marks all the martyrs of science.

Dr. Jesse Lazear, one of the army-commission doctors in Cuba, lost his life in

Copyrighted material

2294

Dr. W. W. Miller, U. S. Public Health Service, Who Lost Life While Fighting Typhoid in Washington

the yellow-fever studies there. Gen. Gorgas, who shares the honors in conquering the disease, escaped and made the Panama canal possible by wiping out the fever there, but his escape was due to the fact that he had had the fever years before in Texas, recovered, and hence became immune.

Within recent years Dr. Howard B. Cross, a young physician of the Rockefeller Foundation, went to Mexico to examine suspected yellow-fever cases at Tuztepec, contracted the disease, and died. The Mexican government named the public-health laboratory at Vera Cruz in his memory. Dr. Clarence Meisinger, a brilliant young scientist of the weather bureau, lost his life last fall when an army balloon in which he was studying thunderstorms was struck by lightning and burned. Like Dr. Cross he was a young man, with a brilliant future, and married, but he gave up his desk in Washington to go out and study the storms in the upper atmosphere.

To be caught in a thunderstorm in a balloon filled with inflammable hydrogen gas is a terrible experience, yet with Lieut. James T. Neeley, an army balloonist, Dr. Meisinger deliberately sought out storms and went up in them to complete studies for a report on their effect on air pressures. They had virtually completed the work, but decided to make one more trip, their tenth. The charred bodies and wreckage of the balloon were found on an Illinois farm the next day.

Announcement recently that four lepers had been cured and discharged at the national leprosarium at Carville, La., after treatment with chaulmoogra oil recalled the story of Dr. Joseph F. Rock, leader of the expedition which found the Taraktogenos Kurzii tree and brought back its seeds to civilization to grow trees from which the healing oil is extracted. He spent nearly a year wandering in the jungles of South China, Siam and upper Burma before he eventually found the trees. On that expedition the plant hunters braved crocodiles, tigers and wild elephants as well as the jungle fevers. Going up the tortuous Meh Ping river to Raheng to reach the overland route to Moulmein, he relates an experience aboard his boat:

"The river at this season being low, it was difficult to make a landing. We tarried only long enough to dispose of many bags of rice, the cause of our constantly grounding on sand banks. Once I lost patience and, being in negligee, I jumped overboard and swam ahead of the boat, expecting it to follow soon. Anxious calls from the captain urged me to return to the boat, quite a difficult matter against the current. The waters, I learned afterward, are infested with crocodiles.

"When I called on the governor of Mesawt, he was holding court for the trial of elephant thieves, who carry on a prosperous business near the border. Leaving his chained prisoners sitting on the floor, the magistrate accompanied me to the rest house where Siamese officials stop when en route from Raheng.

Dr. T. F. Richardson, U. S. Public Health Service, Another Typhoid Victim Who Lost Life at New Orleans

Copyrighted material

2294

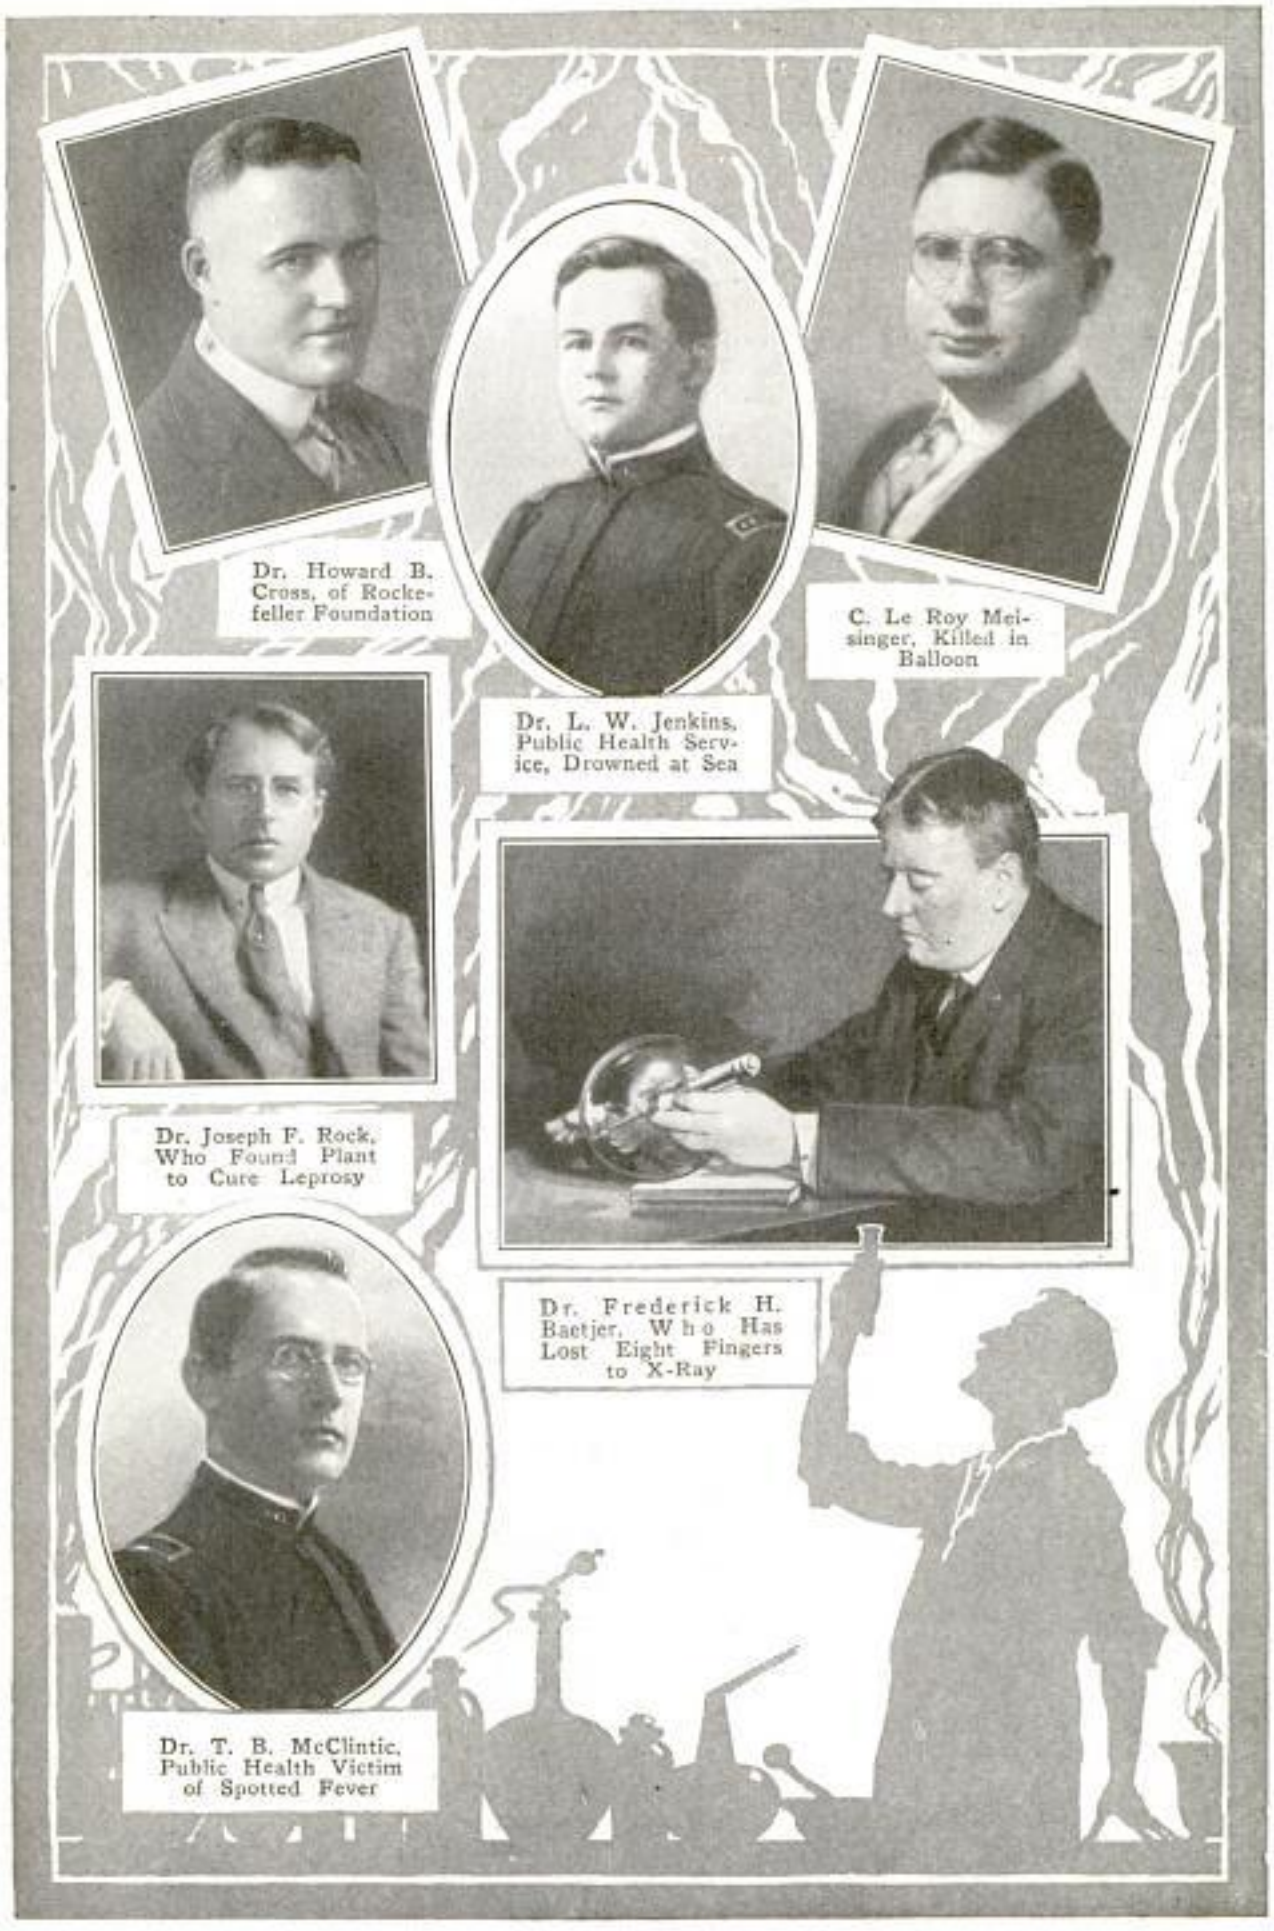

Dr. Howard B. Cross, of Rockefeller Foundation

Dr. L. W. Jenkins, Public Health Service, Drowned at Sea

C. Le Roy Meisinger, Killed in Balloon

Dr. Joseph F. Rock, Who Found Plant to Cure Leprosy

Dr. Frederick H. Baetjer, Who Has Lost Eight Fingers to X-Ray

Dr. T. B. McClintic, Public Health Victim of Spotted Fever

Dr. Rock's Photograph Copyright, Harris & Ewing

Copyrighted material

2294

"Our path lay across the Kawkereik hills, which are covered with glorious verdure, and it was in this region that I first encountered Taraktogenos Kurzii. Unfortunately, it was not in fruit. I was informed by a Burmese village quack that Juiy is the month in which the chaulmoogra fruits ripen. We hurried on and finally reached decadent but beautiful Moulmein on Christmas Eve.

"My next point of venture was the Kalama range of the Martaban hills, where the natives said kalaw, or chaulmoogra tree, could be found. The mountains rise abruptly from the plain, are strewn with huge bowlders, and are intersected by numerous rocky creeks on whose banks grows a species of Hydnocarpus, called by the natives kalaw, but it was not the long-sought-for object of my search.

"I made a last trip into the hills of Oktada and found that Mr. Shwaloo, my interpreter, was correct as to the presence of tigers, for there were fresh tracks leading not far from our camp to the top of the ridge. Only a few hours before the big cat had stalked over the sandy trail to his haunts in the dense, low bamboo forest, which we had to penetrate in a bent position in order to reach the kalaw trees. In all our rambles for three days we found only one tree with some 170 mature fruits, which I secured and the seeds of which I forwarded to America. After two days' marching through dense forest and crossing the Khodan stream many times, we reached Khoung Kyew. Here I found my first genuine chaulmoogra tree, some miles distant from the village proper."

The United States public health service has quite a long list of martyrs. Assistant Surgeon Rosewell Waldo, one of the first of them, gave his life, as far back as 1878, in fighting a yellow-fever outbreak. Two years later Assistant Surgeon W. C. W. Glazier died at Key West from the same disease, contracted while fighting an epidemic there. In 1891, Assistant Surgeon John Frederick Groenevelt was the third yellow-fever victim, dying while fighting the epidemic on the Gulf of Mexico. Another two years, and the same fever added a fourth name to the honor roll, that of Assistant Surgeon John W. Branham. Another died at Key West in 1899, Dr. William Ralph McAdam, and the deadly fever took an additional victim when William W. Rightman contracted it while fighting an epidemic in Ecuador, for which foreign service he had volunteered.

Typhoid cost the lives of Assistant Surgeons Thomas F. Richardson and W. W. Miller, both catching the disease while studying epidemics of it. In 1912, Dr. Thomas B. McClintic, of the health service, fell a victim to Rocky Mountain spotted fever, while studying an epidemic in the west. One of the most recent of government martyrs on the list, Assistant Surgeon Luther W. Jenkins, was drowned at sea when he went from the coast-guard cutter "Manning" to treat a patient on one of the Aleutian islands. On the return trip with the patient, the boat was upset in the heavy seas, and the surgeon, his patient and four seamen drowned.

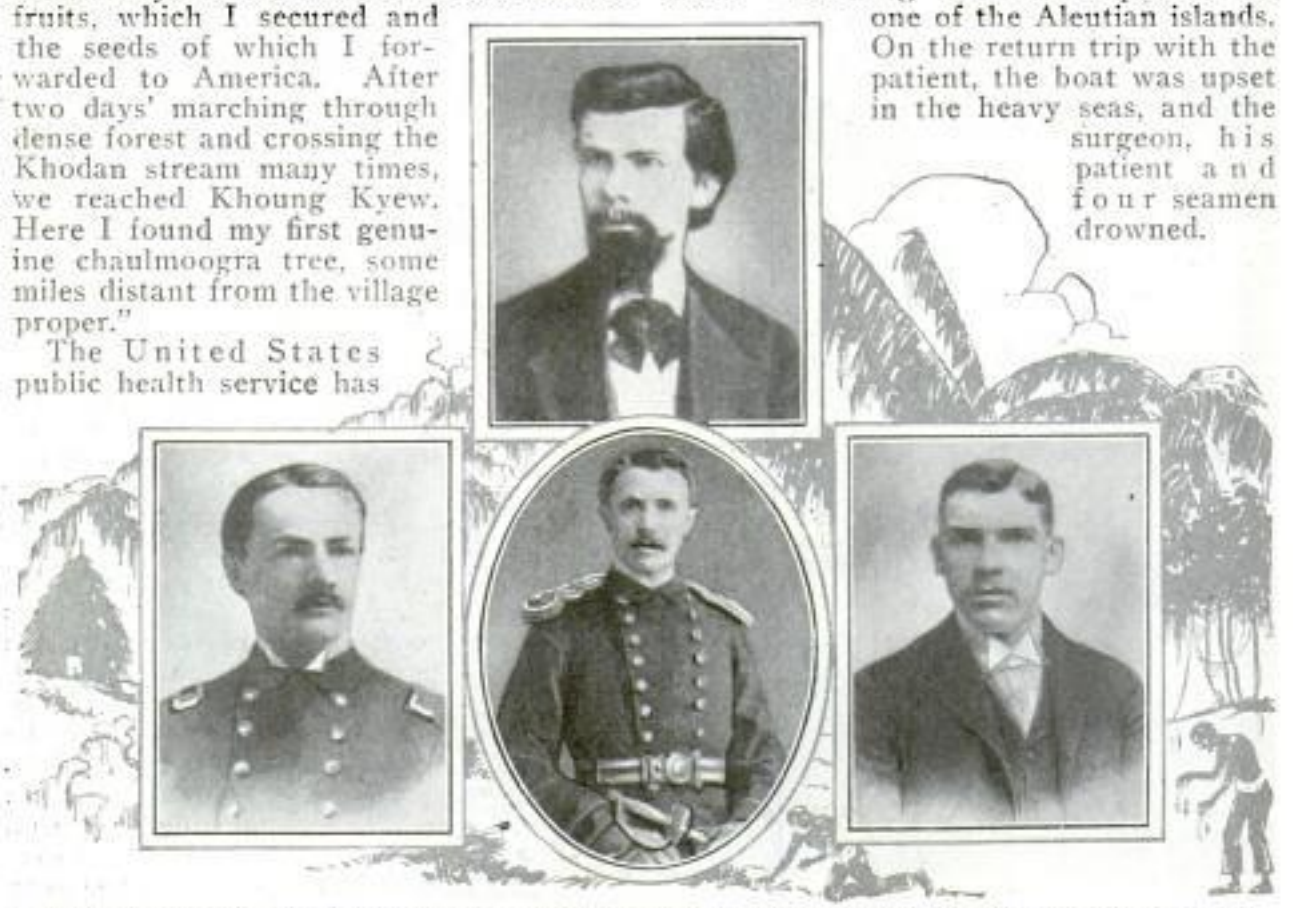

Four Yellow-Fever Martyrs from the U. S. Public Health Service Honor Rolls, Dr. Rosewell Waldo, Above, and Drs. John F. Groenevelt, William R. McAdam and John W. Branham

Copyrighted material

RADIO IS AID TO GOVERNMENT IN ECONOMY CAMPAIGN

It is estimated that the government is saving approximately $100,000 a year in communication charges by handling its messages by radio. Coastwise and off-shore business is transacted by the navy and inland dispatches for many departments by the army, with what signal corps officers call "the most complete and perfected radio network in the world." The war department's message center is in the munitions building in Washington. Twelve stations link the various corps areas, and within each of these divisions are substations, making sixty in all. There are twenty-one in Alaska and seventeen distributed through the island possessions and Panama. Army transports also have radio and at Fort Leavenworth and Salt Lake City are 10-kilowatt tube transmitters to relay transcontinental messages. Leased telegraph wires are maintained from Washington to New York and Baltimore.

SCALES FOR CLUBS AND RACKETS SHOW LEVERAGE WEIGHT

Baseball bats, tennis rackets, golf clubs, and other sports paraphernalia, are given the proper heft or balance with the aid of delicate scales devised for the use of manufacturers, especially. They show the leverage that the weight of a club exerts when held in a horizontal position by the grip. The article is placed under brackets on the base of the scale with the main part extending so that the weight presses upward on the bracket and registers the amount on the beam. Exact duplication of implements from a tested sample is possible with these scales.

Bat, Golf Club and Tennis Racket Adjusted in Scales to Show the Leverage at the Handles

MOVIES FOR AIRPLANE TOURISTS ADD VARIETY TO JOURNEY

Passengers on an English airplane were treated to a motion-picture show lasting an hour and a half while cruising over London. The screen was placed at the forward end of the car and the projector at the rear. Non-inflammable film was used as a precaution against fire. The success of the innovation has led to plans for making regular use of the "flying movies" on long trips and when fogs obscure the scenery.

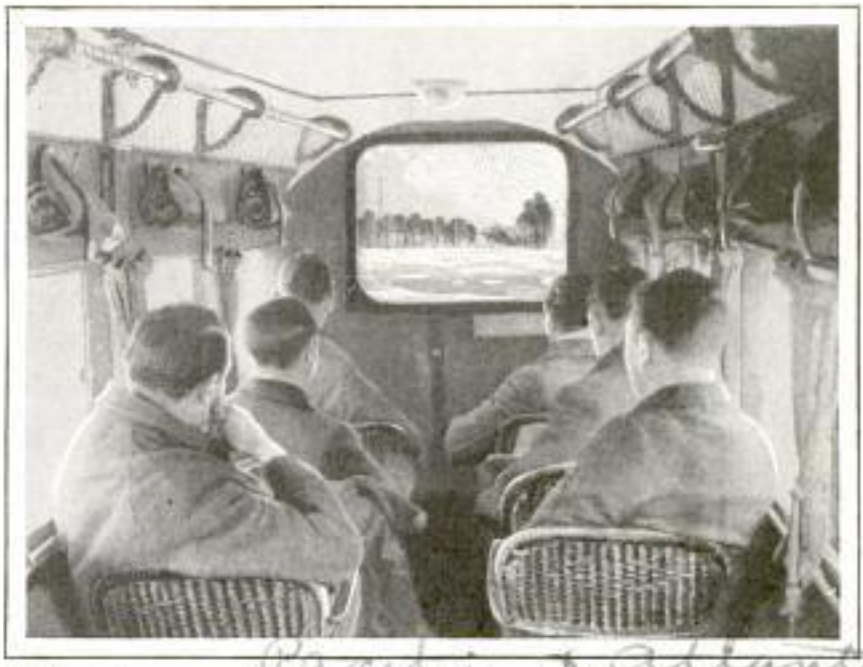

Airplane Passengers Enjoying a Picture Show in Their Cabin during Journey; Fireproof Film Was Used for Added Safety

YEARLY GOLD TOTAL FOR ARTS EIGHTY MILLION DOLLARS

Approximately $80,000,000 worth of gold is used annually in the manufacture of jewelry, gilding, fillings for teeth and in similar work in the fine and liberal arts. Strict account is kept of all this material, and only highly skilled artisans are allowed to handle it. In some shops, the washroom drains are so adjusted that gold dust from the workers' hands can be reclaimed, saving thousands of dollars a year.

Clerks Examining Bullet-Ridden Bandit Dummy

CLERKS TAUGHT TO GUARD BANK BY SHOTS AT DUMMY BANDIT

The prevalence of holdups has led bankers in southern Illinois to use a dummy bandit as a target for their clerks during pistol practice to train them to repulse attacks from real robbers. The figure is life-size, and the results of each marksman's shots are noted by writing his name at the holes made by his bullets.

FEW ANIMALS LEFT THAT DEFY SKILL OF TRAINERS

Only a few species of wild animals remain untamable in spite of the fact that, a short time ago, many now represented by specimens in captivity were thought to defy any attempt at training. The fierce African elephant, classed among the most ferocious living creatures, is hunted for use as a beast of burden, and the shy and once unconquerable zebra, until recently said to resist every effort to break it to harness, has been taught in many cases to trot docilely in teams, hitched to carts and buggies. Even the most savage wolves submit to the skill of patient trainers, and if caught while young, can be raised to be as domestic as a dog. Most wildcats never lose their dislike for captivity, and rarely overlook an opportunity to attack their keepers. Though captured as kittens the ferocity of this wild feline remains throughout its life. Another wolflike animal, known as the "Tasmanian devil," is so wild and savage, that it refuses to respond to any treatment, and usually dies if kept caged. All the great species of the cat family, such as lions, tigers, and some leopards seem to take kindly to training, but the black jaguar, one of the most dangerous of beasts, cannot be domesticated. If caught in the kitten stage, it spitefully refuses the attentions of mankind. Generally, ordinary leopards are captured young, when they can be fairly well trained, but like the North American bobcat are liable to revert suddenly to savagery.

NEWSPAPER RACK FOR WALLS SAVES COUNTER SPACE

Newspapers are held in a vertical position where patrons can quickly make their selection, in a rack that fits against the wall, saving valuable counter space at public stands. Weights, with wire-bracket extensions to keep the contents from falling out, are attached to the divisions in the rack, and there is a slot in the bottom rest for easy withdrawal. Papers are inserted with little trouble, are protected from damage and can be arranged in attractive displays on this holder.

Rack Installed on Wall, Showing How Paper Is Easily Slipped Out for Sale

Copyrighted material

New Radio Tube Works from Light Socket

Uses Alternating Current to Eliminate A-Battery in Set and Gives Greater Volume

MAKING the radio receiver as easy to use as an electric iron or toaster, a new tube now on the market dispenses with the storage battery completely, as the "filament" leads need only to be plugged into the nearest alternating current electric-light socket.

When a B-eliminator is used with the set it becomes practically a no-battery set, as the ordinary C-battery lasts so long that it is rarely considered at all. The new tubes, which have been successfully tested in Popular Mechanics laboratory, use the standard type of grid and plate, but there is no filament. Replacing the latter is a hollow porcelain tube, in the center of which is a heater element, supplied from the light plug. Around the outside of the tube is a metal sheath or cylinder, known as a cathode, and when the current is turned on this is heated by the element inside the porcelain and gives off electrons just as the filament does in the common battery tube. The 110-volt current from the lighting circuit is stepped down through a small transformer, which is provided with taps for various voltages from three and one-half to five. When using from one to three tubes, the 4-volt tap is used and for four or five tubes the 5-volt tap. The tube base is made to fit any standard socket, but only one of the filament prongs is used—the one normally used for the negative filament lead—and this is connected, in the tube, to the lower part of the cathode.

The current is supplied to the cathodes of the tubes by means of two busbars running across the top of the panel, and connection is

Drawing of New Tube, and Set in Which Both A and B-Batteries Are Eliminated

Copyrighted material

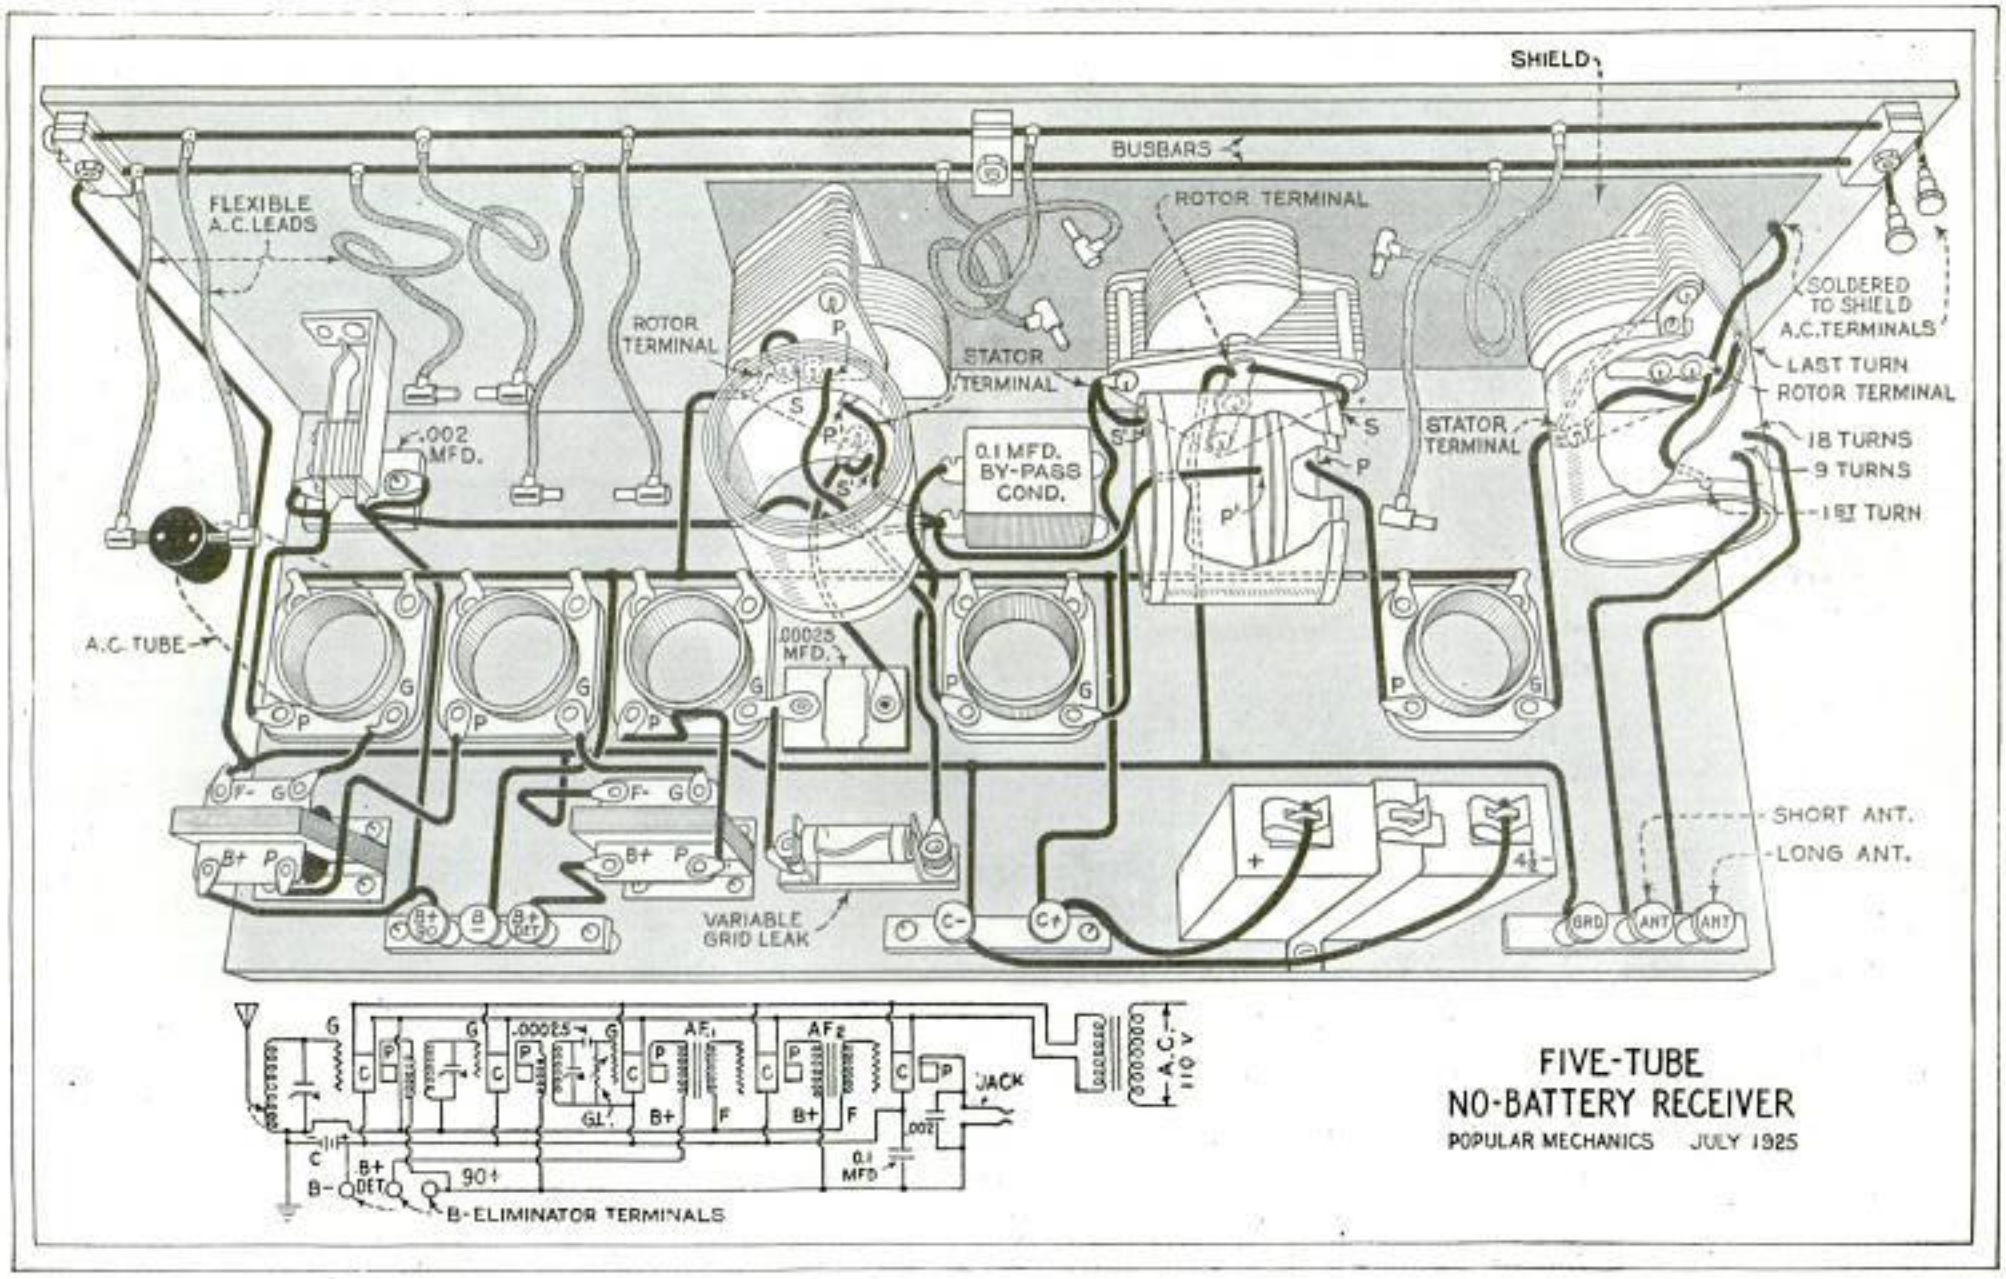

FIVE-TUBE NO-BATTERY RECEIVER

POPULAR MECHANICS JULY 1925

Copyrighted material

made to the tubes by flexible leads with small clips on the ends that fit over the cathode prongs on the tops of the tubes. There is no need for rheostats in the set using these tubes, another feature that should appeal to the home radio builder.

Elements That Make No-Battery Set Possible; from Left to Right, the B-Eliminator, the Tube and the Step-Down Transformer

The five-tube set described in this article can be built for a cost of about $105, including a $25 B-eliminator. In an actual test the volume of this set was about twice that of ordinary tubes. The tone quality was maintained even in the exceptionally loud signals. Seventeen distant stations were brought in under unfavorable conditions in less than two hours. All parts used are standard, and the circuit is probably familiar to many of our readers. The schematic diagram below the large detailed drawing is given for checking purposes and to clearly show the basic changes made in the usual circuit, to apply the new tubes to any standard receiver. The front panel can be either bakelite, formica, or any similar material, 3/16 by 7 by 24 in. This is a size that will fit the standard cabinets. Where a cabinet can be obtained to take a panel 3/16 by 8 by 25 in. more room is available for placing the a.c. busbars. The wood base panel is ½ by 7½ by 23½ in. A thin brass shield 3½ by 15½ in. is used on the rear of the front panel for shielding the tuner unit and the two tuned radio-frequency units. The position of this shield is clearly shown in the simplified diagram. The shield must be cut away from the instrument mounting holes so that no instrument touches the shield. This shield is grounded to the negative C-battery and ground line; this ground wire is not shown on the diagram. The busbars should be of heavy wire, not smaller than No. 12 and heavier if possible. The busbars are fastened to the panel as far from the set wiring as possible, to prevent any a.c. hum by induction. Three sets of bakelite blocks, made from strips 3/16 by ½ by 1¼ in. long are used as clamps, and are notched to take the busbars, separating the bars as far as possible. A nickel-plated machine screw holds the blocks together in the center, and completes the mounting through the front panel. The tuner coil and two radio-frequency units are mounted with the coils at right angles,

Copyrighted material

low enough on the front panel to clear the flexible leads to the tubes. These units can be any standard kit type, or made up in the low-loss form if desired. The condensers used are .00035 mfd. The tuner coil consists of 80 turns of No. 22 d.c.c. magnet wire wound on a 3-in. bakelite tube, 3 in. in diameter. This coil is tapped at the 9th and 18th turns for short and long aerials. Use the aerial connection that best spreads the stations out over the dials. The tuner coil is mounted on the condenser by means of two small brass brackets. If the variable condensers supplied with the radio-frequency units are .0005 mfd. use the same type of condenser with the tuner coil, and place 58 turns on the coil, instead of 80. Tap off at 9 and 18 turns as before.

The grid leak used is a new form of the variable type, and is very efficient. The range is from ½ to 7 megohms. Any good make of audio-frequency transformers, with a ratio of 3½ to 1 can be used. The jack is the open-circuit type. The binding post strips at the rear of the base panel are mounted on 1-in. fiber rods, or fiber tubing, by means of long wood screws. These bakelite strips supporting the binding posts are 3/16 by ½ by 3¼ in. long. Binding posts with engraved tops are used. It will be noted that the rotor plates of the radio-frequency unit condenser next to the tuner unit are connected to the ground line, and the rotor plates of the tuner unit condenser have a ground connection through the brass shield. No. 14 tinned copper wire is used for the circuit, and covered with spaghetti tubing where necessary.

The receiver is tuned in much the same manner as a neutrodyne set, the dial readings for the various stations being about the same for a given wave length. The connections from the B-battery eliminator and the a.c. transformer are clearly shown in the sketch. The two plugs can be connected in the same socket by means of a double-socket arrangement. Test the circuit for error by connecting one side of the a.c. lead to the set on the 3½-volt terminal on the a.c. transformer, and place only one tube in the socket. If the heating element in the tube glows properly change the wire to the 5-volt post on the transformer and place the other tubes in the sockets. Plug in the horn. If a drumming noise is heard in the horn reverse the polarity in the plug leading to the B-battery eliminator. If a bluish tinge is noticed in any of the tubes, it soon passes away, but if the heavy blue color persists, and the tube does not function properly, it can be returned for replacement.

The cost of operation of this set is about 7/10 cent per hour. In some cases it may be found advisable to use a higher C-voltage, especially where a higher B-voltage than 90 is used, and in many cases it will be found that the ground already present in the a.c. line is sufficient, and that the set will work better without a ground.

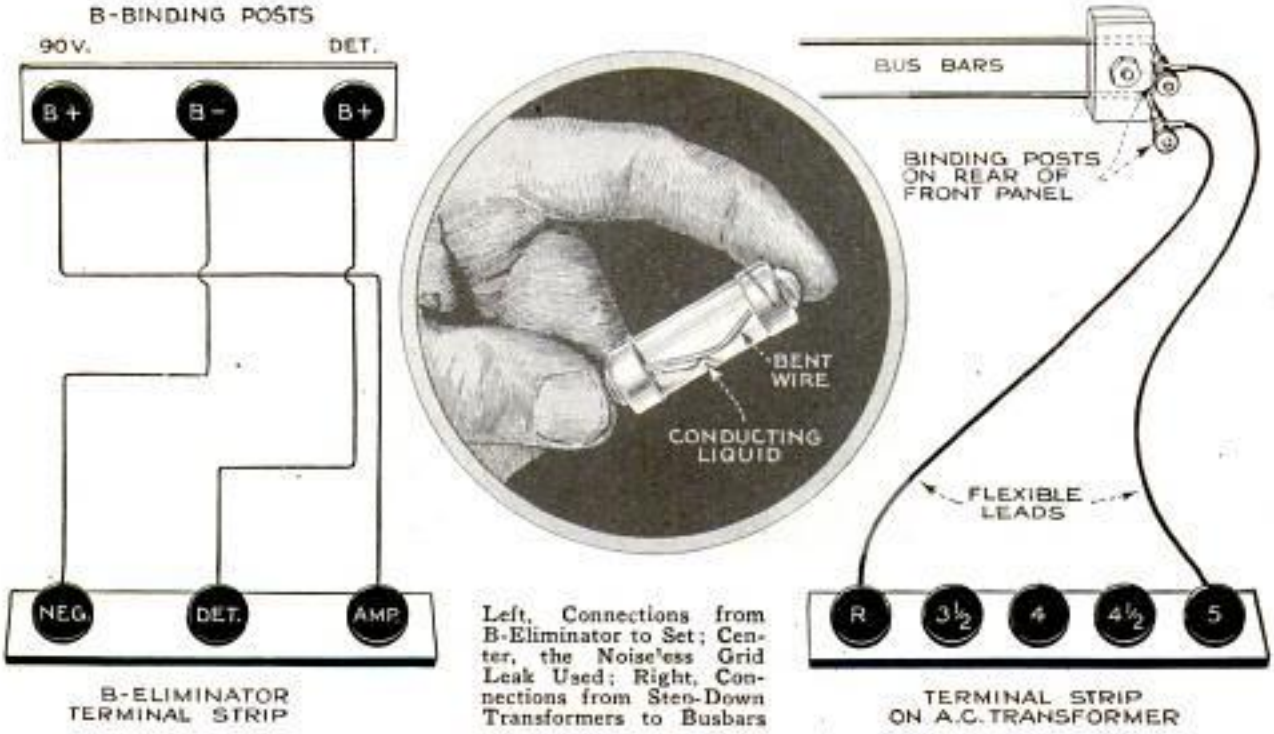

Left, Connections from B-Eliminator to Set; Center, the Noise'ess Grid Leak Used; Right, Connections from Step-Down Transformers to Busbars

Complete blueprints and material list for the construction of this receiver may be obtained for the cost of packing and mailing. Send 10 cents to the Radio Dept., Room 515, 200 E. Ontario St., Chicago, specifying this set.

Copyrighted material

THREE-JOINT CONNECTING ROD STOPS AIRPLANE POWER LOSS

What scientists herald as an exceedingly important aid to aviation is a simple engine attachment, devised by a French inventor, to prevent loss of motor power when planes ascend to great altitudes. Tests by the French air service are said to have confirmed the claims of the maker, and with its use, heights of six miles without great decrease in engine force and transatlantic flights in a few hours between New York and Paris are considered possibilities. Its secret is the introduction of an eccentric between the piston of the engine and the connecting rod, thus giving the part three joints instead of the two now used. This eccentric serves as a sort of knee, enabling the aviator to change the internal compression at will. A shift one way increases the size of the chamber, thus reducing the compression; a shift the other way makes the chamber smaller, increasing the compression and offsetting the growing rarity of the atmosphere as the altitude increases. At a height of three and one-half miles, a plane is said to lose fifty per cent of its motive power, a serious handicap to maneuvers and fast flights. The attachment weighs but sixteen pounds for a motor of 250 horsepower and is simple to operate.

SHARPENER FOR LAWN MOWER HAS RENEWABLE STONE

Lawn-mower blades and the stationary knife at the bottom can be sharpened thoroughly and with little trouble with a whetstone inside an adjustable clasp that can be fitted to almost any make or size of machine and simplifies the operation. The holder has guide flanges that rest upon the edges of the blades and a thumbscrew for tightening it to the work. The sharpener is moved back and forth with a sweeping motion and a few strokes are said to be sufficient to produce a keen cutting edge. When the stone becomes worn, it is easily turned around, or may be taken out for cleaning with gasoline or soap and water when it gets coated with steel. The stationary knife of the mower is sharpened by removing it and placing it in a vise.

SPARE-TIRE RACK WITH SPRING SAVES LIFTING ON AND OFF

Spare tires are locked securely and do not have to be lifted on or off in a rack which has a spring within a steel tube that forms the back of the holder. This acts as an elevator, raising the tire to the curved upper part where it is fastened. To remove the spare, the lock is opened, a button touched and the tire pressed down. As it rolls out, the spring remains extended and ready to hoist the next tire.

Fitting Spare Tires into Rack That Has Spring to Lift It into Place

SAND BLAST REMOVES VARNISH FOR INTERIOR DECORATING

Sand-blasting, the effective method for removing soot and dirt from the outside of buildings, has been adapted to interior decorating. Using an ordinary air compressor and blast equipment, five men in two weeks removed the varnish from 18,000 square feet of oak, cleaning it so thoroughly that the natural color and texture of the wood were revealed, and a light coating of filler was the only application needed to give an attractive finish. Eight men previously had worked a week with scrapers, sandpaper and varnish remover, but had cleaned only two sides of the beams on the ceiling.

Copyrighted material

THREE-SPAN CONCRETE BRIDGE SEVEN HUNDRED FEET LONG

Modern skill in concrete construction is exemplified in a handsome bridge over the Van Duzen river in Humboldt county, California, built to replace an old one which had become inadequate for automobile traffic. It has three long spans with a total length of 734 feet, the rising bridge forming a gracefully bowed arch from bank to bank. A concrete railing of artistic design, interrupted by drainage openings at the bottom, surmounts it. During the building, a temporary wooden roadway was laid across piles driven close to the surface of the water to handle the traffic.

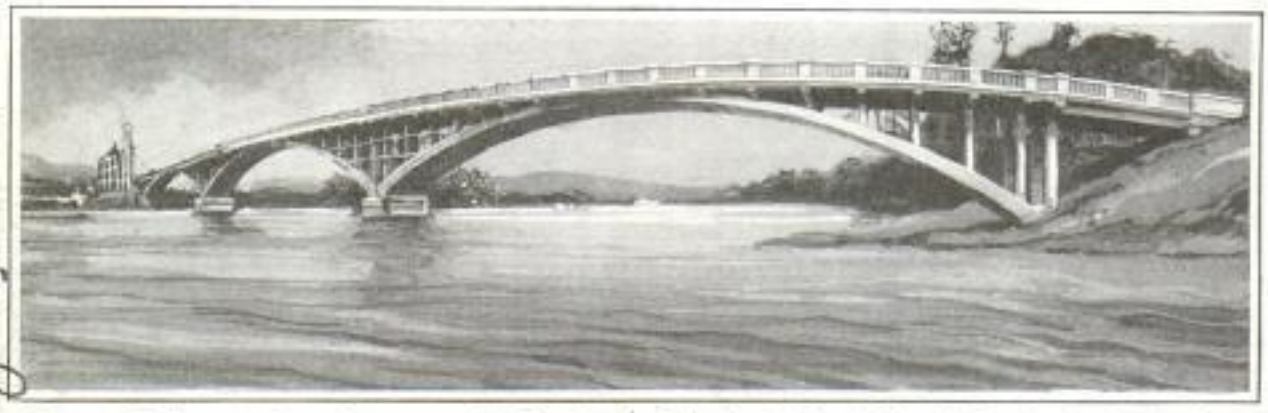

Concrete Bridge, 734 Feet Long, over the Van Duzen River in California Nearly Completed; the Arching Spans with Upright Braces Are Sturdily Built to Withstand Time and Heavy Traffic

SCIENCE TO IMPROVE LEATHER AND MAKE BETTER SHOES

Processes by which shoes can be made more comfortable and millions of dollars saved to industry by prolonging the life of leather, have been discovered, according to the American chemical society. One involves using Glauber salts instead of the common salt in tanning hides. The presence of calcium chloride in the latter is said to be destructive, whereas the substitute is reported to have a definite preservative action. An apparatus has been invented for determining what kinds of leather allow the greatest amount of perspiration to pass from the foot and thus increase the wearer's comfort. It was found that patent varieties permit the least evaporation and ordinary calf leather the greatest. Science's warfare against bacteria of all kinds is also being used to the improvement of leather in showing how to kill various small organisms that cause spots, stains and other imperfections and in combating the effects of mold, which does its greatest damage after tanning.

ANTI-AIRCRAFT MACHINE GUN SHOOTS THREE MILES HIGH

One of the most effective anti-aircraft machine guns that the war department has devised is a .50-caliber weapon with improved mounting and sights. It has an armor-piercing vertical range of from 6,000 to 7,000 yards and can shoot between 500 and 600 shots a min-

Testing the Late Type of Anti-Aircraft Gun for Army Defense; It Is Easily Moved and Has Long Range

Copyrighted material

ute. It also fires tracing shells for a distance of 2,200 yards. These bullets leave a path of smoke, visible by day or night, so that the effect of the fire may be seen and the aim corrected. The .50-caliber gun is to be made the standard for batteries. Other developments in arms for fighting airships include semi-automatic infantry shoulder rifles, improved mounts, sights, ball and tracer ammunition for .30-caliber machine guns. Greater efficiency is expected from the latest weapons, details of which are guarded as secrets.

X-RAY PICTURES BY TELEPHONE

Transmission of X-ray pictures over long distances by telephone has been successfully accomplished. In a test, one such photograph was sent from New York to Chicago in seven minutes without the loss of any detail, making an accurate study of the film possible. By this method and with the proper equipment for sending the pictures, the aid of eminent specialists and experts may be instantly summoned to assist in treatment of injuries and diseases in cases many thousands of miles distant, eliminating the necessity of moving patients to large cities for diagnosis of ailments requiring special study. The possibility of sending X-ray negatives by wire also permits physicians in small communities to procure the assistance of highly experienced doctors on the staffs of the country's large hospitals, in a short time, where a saving of hours or days may decide the success or failure of treatment. Persons meeting with accident or becoming ill while traveling far from home, could have the aid of the family doctor without the physician leaving his office.

Picnic Luncheon Is Eaten in Comfort, without Leaving the Car, on Folding Table That Is Quickly Set Up and Fits under Cushion

FOLDING TABLE FITS AUTO DOOR FOR MEALS OR GAMES

Added comfort and utility can be enjoyed on outings in the motor car by using an enameled-steel folding table for luncheons or other purposes. On closed cars, it hooks between the glass and the inside edge of the door. It is supported by hinged braces that rest below the pane and are held by a cross wire. It can be set up in little time, and when not in use, is carried under the cushions or the door pocket. It is suitable for playing games, writing, or holds the radio cabinet or the typewriter. Seventeen inches long, fifteen inches wide and half an inch thick, it provides ample space for serving the picnic meal inside the car, doing away with the bother and possible unpleasantness of eating at an undesirable outdoor spot. The tables are so small that three or more of them may be carried in one car.

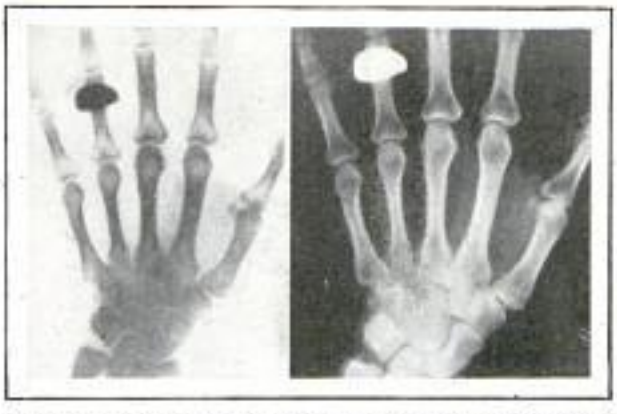

X-Ray Photographs of Human Hand Transmitted by Telephone Nearly 1,000 Miles in Seven Minutes

Copyrighted material

3076

On the Blazing Trail of the Air Mail

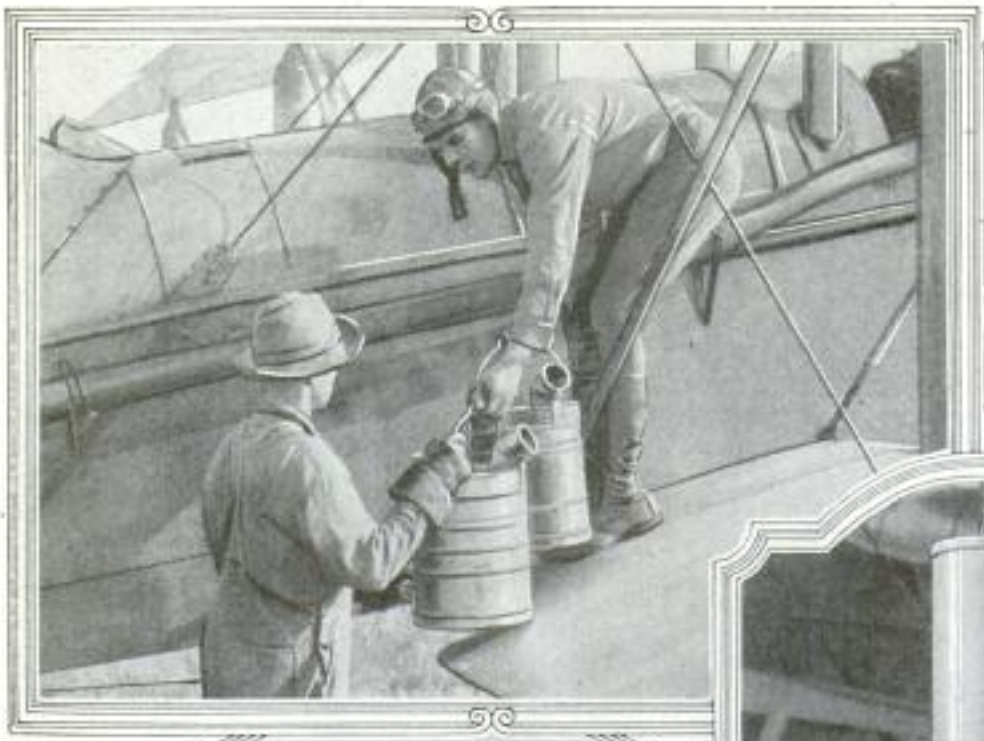

Stopping for Fuel at One of the Emergency Landing Fields Which Are Set Twenty-Five Miles Apart and Have Facilities for Warming Oil and Water in Cold Weather

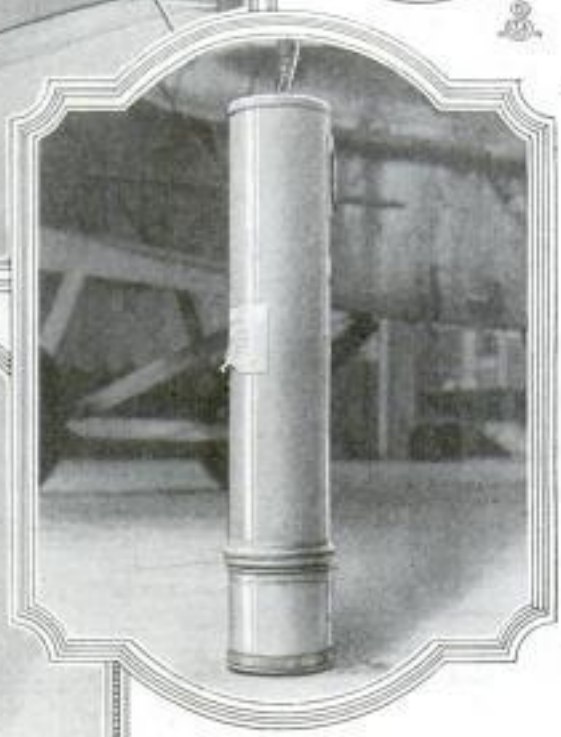

Besides Plane Lights, Pilots Have These Tubes Containing a Parachute Flare That Drifts Slowly Down to Guide a Forced Landing

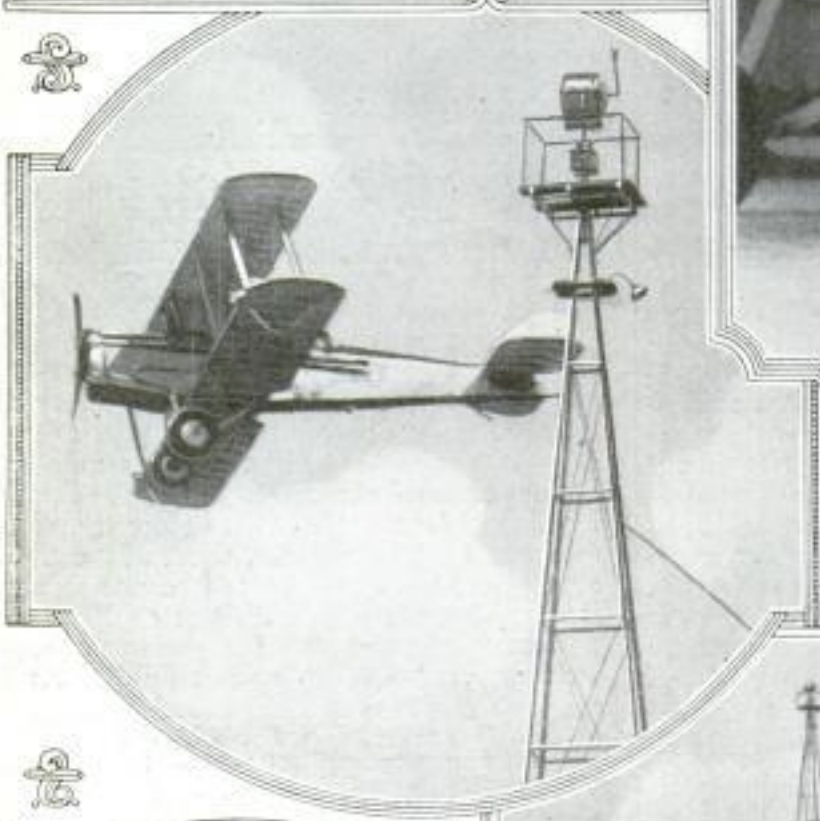

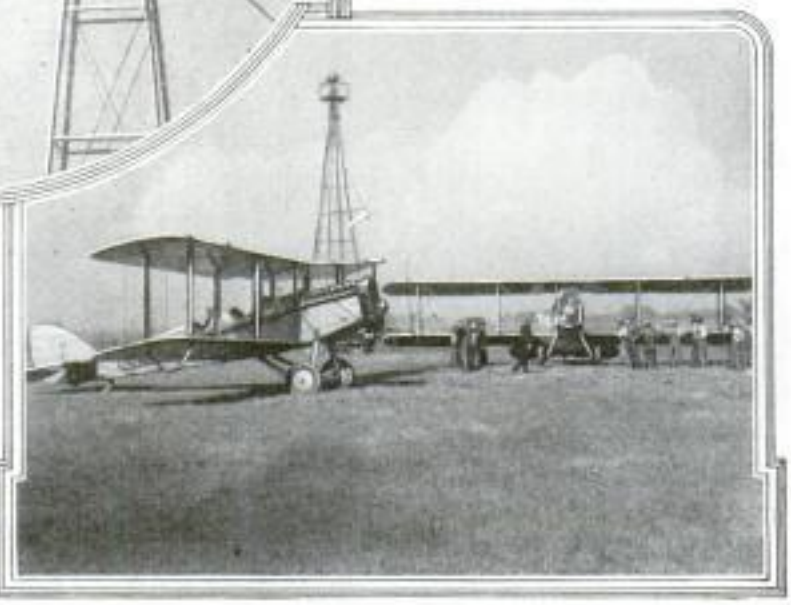

Winging Past the Six-Million-Candlepower Rotating Electric Beacon That Marks the Emergency Field at Night and Helps Direct the Flyers by Day with Its Tall Steel Tower; Planes Meeting at One of These Points for Transfer of Mail

Copyrighted material

3076.

Beacons That Guide Flyers across Nation

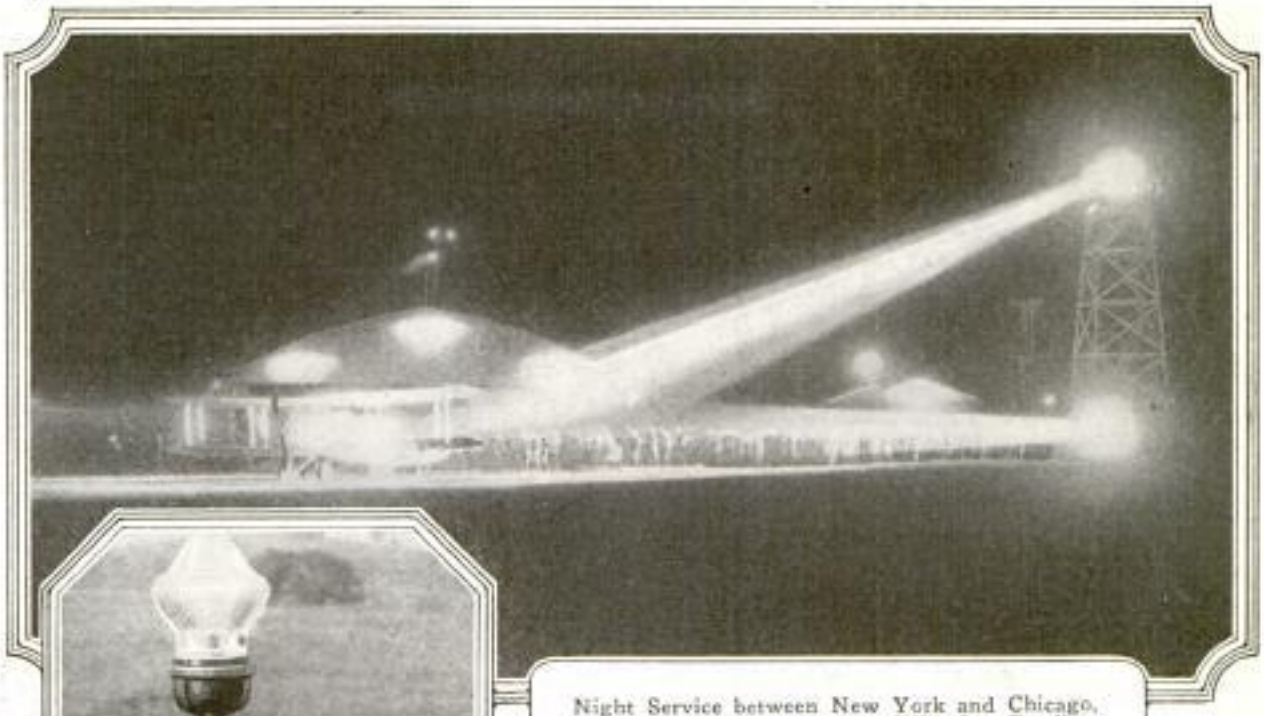

Night Service between New York and Chicago, Scheduled to Start July 1, Will See Duplications of This View, a Main Air Port with Both of Its 500,000,000-Candlepower Beacons Glowing

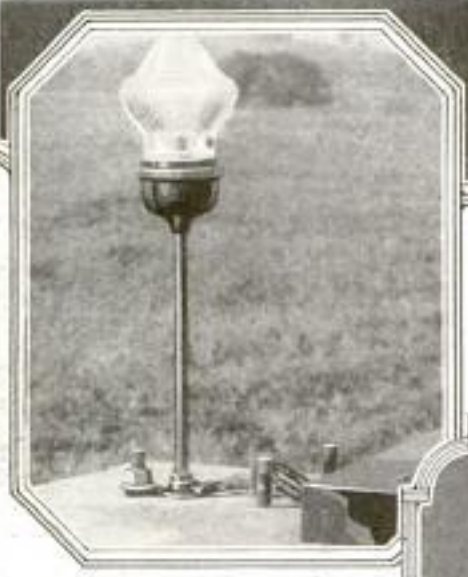

Sixty-Watt Border Lamp, Portable Beacon, and Left, Blinker Light; Set at Three-Mile Intervals, They Wink 150 Times a Minute, Go On Automatically at Night and Are Extinguished by Daylight

Copyrighted material

Where Old Papers Are Converted into Packing; the Shredder, Above, with Its Rows of Knives Slitting Sheets into Narrow Strips; the Cutter That Removes Glued or Stapled Edges, and an Armful of the Material Ready for Use

EXCELSIOR FROM WASTE PAPER CREATES NEW INDUSTRY

With the increasing scarcity and rising price of wood excelsior, a satisfactory substitute has been found in waste paper, and its manufacture has created a new industry. Plants are now established in Seattle, Detroit, San Francisco and other large cities, where old newspapers and magazines are cut into narrow strips for packing merchandise. The machinery required is simple, consisting of two types of cutters, one for removing the stapled or glued edges of printed publications and the other for shredding. The finished product is baled like straw. The process affords an additional market for gatherers of waste paper, the excelsior is lighter than wood, and, when made from unprinted surplus from newspaper and other publishing houses, is considered more attractive around fine articles, such as confectionery. Formerly this surplus was burned or returned to the factory.

PADS BETWEEN SPRING LEAVES REDUCE AUTO BUMPS

Small rubber cushions have been devised for insertion between the leaves of automobile springs to reduce shocks. They are about the size of a nickel and have a small air hole in the center. The weight of the car reduces the rubber to about three thirty-seconds of an inch in thickness, thus compressing the air in the center pocket, and forming a resilient cushion that absorbs the jars and creates a suction which helps hold the device, because the latter is sealed by the leaves.

LAUREL RIVALS BRIER FOR PIPES WITH LESS COST TO SMOKER

Doing away with the trouble and expense of locating and digging brier roots for the manufacture of tobacco pipes, an English expert claims that laurel wood can be worked into a valuable substitute at less than one-eighth the cost. Similar in appearance to the best grades of French brier, the laurel wood is first cleaned and cut into blocks which are placed in hot-water vats and allowed to simmer for about sixteen hours, or until the desired degree of coloring is produced. Pipes made from the material have a glossy surface, and are said to possess no unpleasant taste and to give a delightfully cool flavor to the smoke.

WOODWORKER HAS ALL TOOLS ON MOTOR SHAFT

A portable electric-driven woodworker, in which all cutting tools are mounted directly on the motor shaft, can be turned to any desired angle or moved along a horizontal arm to reach any part of the material being worked. The apparatus, which has been designed to save much hand labor on tasks where the material cannot be easily transported to stationary machines, is said to perform practically every operation required in woodworking. Owing to its light weight, it may be readily carried about by two men, making a handy tool for use by contractors, planing mills, and similar concerns, and because of its tilting arrangement may be employed for work that might otherwise call for larger special machines.

Tool on Its Swinging Mount Is Easily Tilted at Any Angle to Reach Corners

CLAMS AS PEARL "INCUBATORS" PRODUCE LUSTROUS GEMS

Production of pearls in such numbers as to make them available for buttons and ornaments at lower prices than those for which artificial pearls can be made, is announced as the result of a process

Examining Pearls in an Opened Clam; Young Woman Is Holding a Specimen Gem

of injecting a small organism into salt-water clams. This sets up an irritation on the fold of the bivalve, causing the formation of a number of tiny "seed" pearls. These are removed and inserted in the folds of other clams where they grow to considerable size and luster in a few months. The clam "incubators" can be used repeatedly for successive crops of pearls. They are kept in salt water at a higher temperature than that of the ocean and are fed to stimulate their growth.

RINGS ON SCALES OF SALMON REVEAL ITS AGE

Every year adds a series of half circles to the scales of the trout and salmon, according to John N. Cobb of the University of Washington, thus providing a clue to the age of the fish just as tree rings indicate the growth of the wood. The lines on salmon scales also reveal, roughly, the amount of food consumed each season. After a good year, with plenty to eat, the marks are wider than in lean years.

Copyrighted material

Eli Lilly + Co. 210 McCarthy St
Indianapolis Ind.
2912

Doctors Pills *from* Hothouses

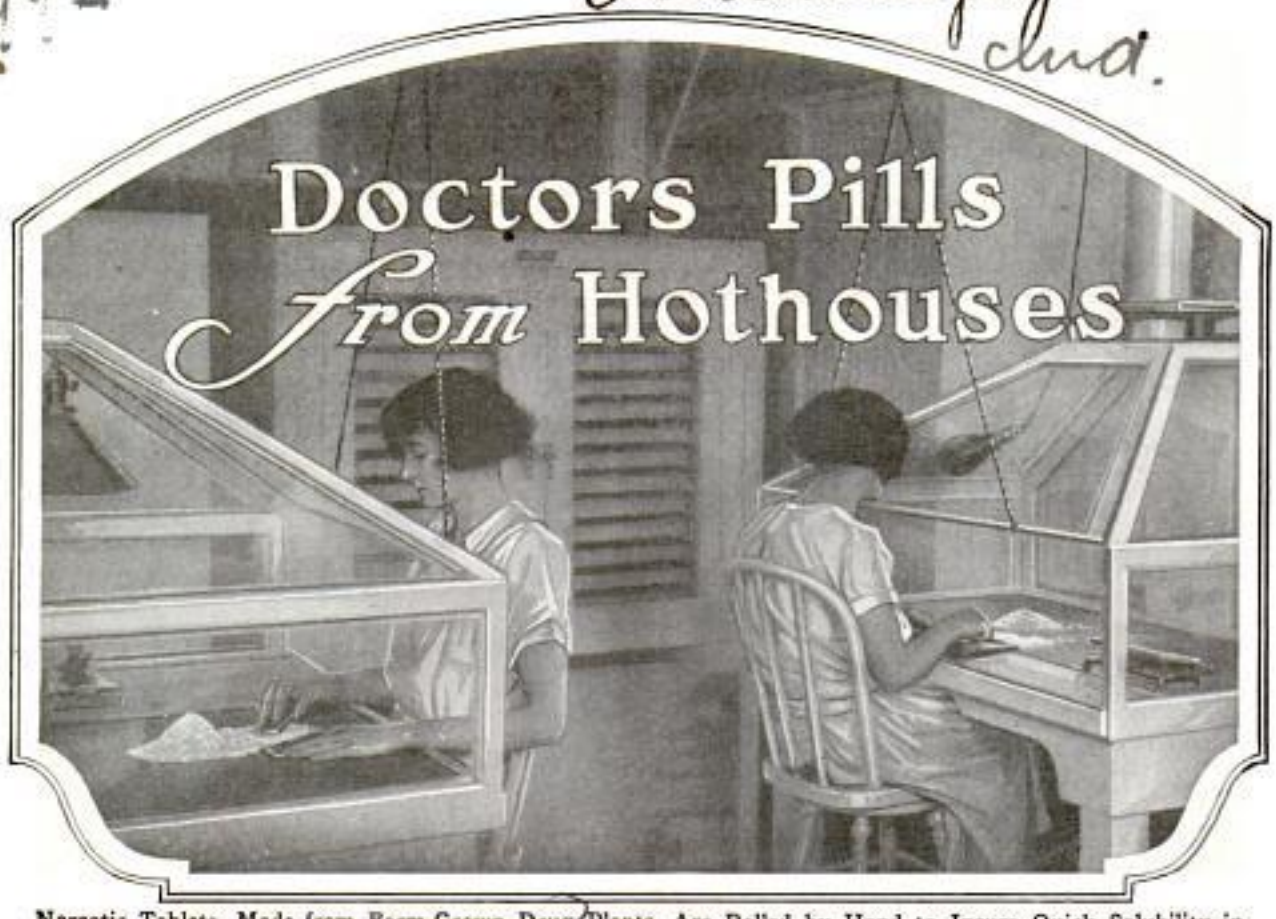

Narcotic Tablets, Made from Farm-Grown Drug Plants, Are Rolled by Hand to Insure Quick Solubility in the Physician's Syringe

GROWING the physician's pills and nostrums from hothouse seedlings to full-matured field plants has insured America's protection from disease regardless of wars or other causes which may cut off the supply of strange herbs from far-scattered lands.

In times of peace and fair weather in the countries from which they come, most of the drug-giving plants can be produced more cheaply there in the wild state than over here under glass roofs and with higher-paid American labor. But when war or drought or other cause interrupts the foreign supply, the plant experts at a large laboratory and drug farm, near Indianapolis, are ready to step into the breach.

Thus, during the World War, when the usual supplies of belladonna from the old Austro-Hungarian empire were cut off, the laboratory not only produced enough of the drug to fill the inflated war demand, but by scientific cultivation and selection improved on the wild plant to get a strain which yielded more of the medicine. When peace came again and prices dropped, the wild supply undersold the cultivated, but the work of bettering the laboratory strain goes on, with a sufficient supply of plants to go into quantity production at any time. The same was true of atropine, the drug which the oculist uses to dilate the eye pupils, and which has many other medicinal uses. The usual supply is an Egyptian plant, which yields about one per cent of the drug by volume. Before the war the world's supply of the Egyptian plant was controlled by German chemists, and when the war broke out the imports to America ceased.

But the American scientists were equal to the emergency. In the stramonium, or common Jimson weed, which grows in profusion throughout many states, there was a possible supply of atropine. The Jimson weed yields less than half of one per cent of alkaloids, and only a part of that is atropine, but with enough of the weed, it was possible to meet the war-time demand, when large quantities of the drug were used by army doctors. The drug plant not only bought up tons of wild Jimson weed from farmers, but cultivated it and produced better strains.

An amusing incident occurred in the first rush to buy wild weeds when a newspaper advertisement, offering $20 a ton for the weed, appeared by mistake with the price fixed at $20 a pound. Before the error could be corrected, three farmers from a near-by village caught the next

Copyrighted material

Buchu, an African Drug Plant, Is One of Few Which Defy Transplantation to America, and It Is Still Taken to Market by Bullock Cart; Below, Harvesters Gathering in the Belladonna Crop on the Indiana Drug Farm

Belladonna Seedlings Are Grown in the Hothouses in Early Spring and Then Moved into Shifting Boxes for Transplanting When the Warm Weather Permits; Right, the Transplanting Machine at Work in the Fields, Carrying Its Own Water Supply for the Young Plants

Copyrighted material

Machine Like a Change Rack Sorts Pills in Rows of Twenty to Be Pushed into Slim Glass Vials Ready for Shipment to the Doctor

interurban with suitcases bulging with Jimson weeds, ready to sell them at 2,000 times the price which it had been intended to offer. And the laboratory gamely paid the price!

The plant laboratory has swept cannabis, a drug plant from India, out of the American market, because it can be produced more cheaply here. Cannabis is the plant from which the drug hashish comes, a mild narcotic which has many medicinal uses. The story of its introduction into America is a romance of the alertness of American scientists. The plant experts at the laboratory noticed that the Indian shippers carelessly failed to clean the plants thoroughly and remove all the seeds. So they began removing and saving the seeds, and found some that would germinate. When the war came and the cost of the Indian supply advanced, they were ready to grow cannabis in commercial quantities here, and ever since it has held the market.

Henbane is another mildly narcotic plant grown on the drug farm. It yields several substances, one of which is suitable for the narcotic preparation which produces twilight sleep. Even such prosaic things as oats are produced at the plant farm. Picked green, with the seeds stripped from the stalk by hand, oats is a useful medicinal agent. It is easier to raise it at the plant, where it may be stripped at the exact stage of greenness required, than to try to buy it green in the market. Carrots, too, are raised in quantities, but not for direct consumption as medicines. They go to feed the guinea pigs and rabbits which are used for necessary tests.

The plant laboratory is also experimenting with and improving many native American herbs, preparing against the day when advancing civilization and the dying out of the quaint profession of drug digging will exhaust the wild supply.

In the hills of the Carolinas, Tennessee and Kentucky and in southern Indiana, the drug diggers and herb doctors still flourish, practicing an art that has been handed down through families for many genera-

Rows of Gelatin Capsules Emerging from the Automatic Capsule-Making Machine

Copyrighted material

2992

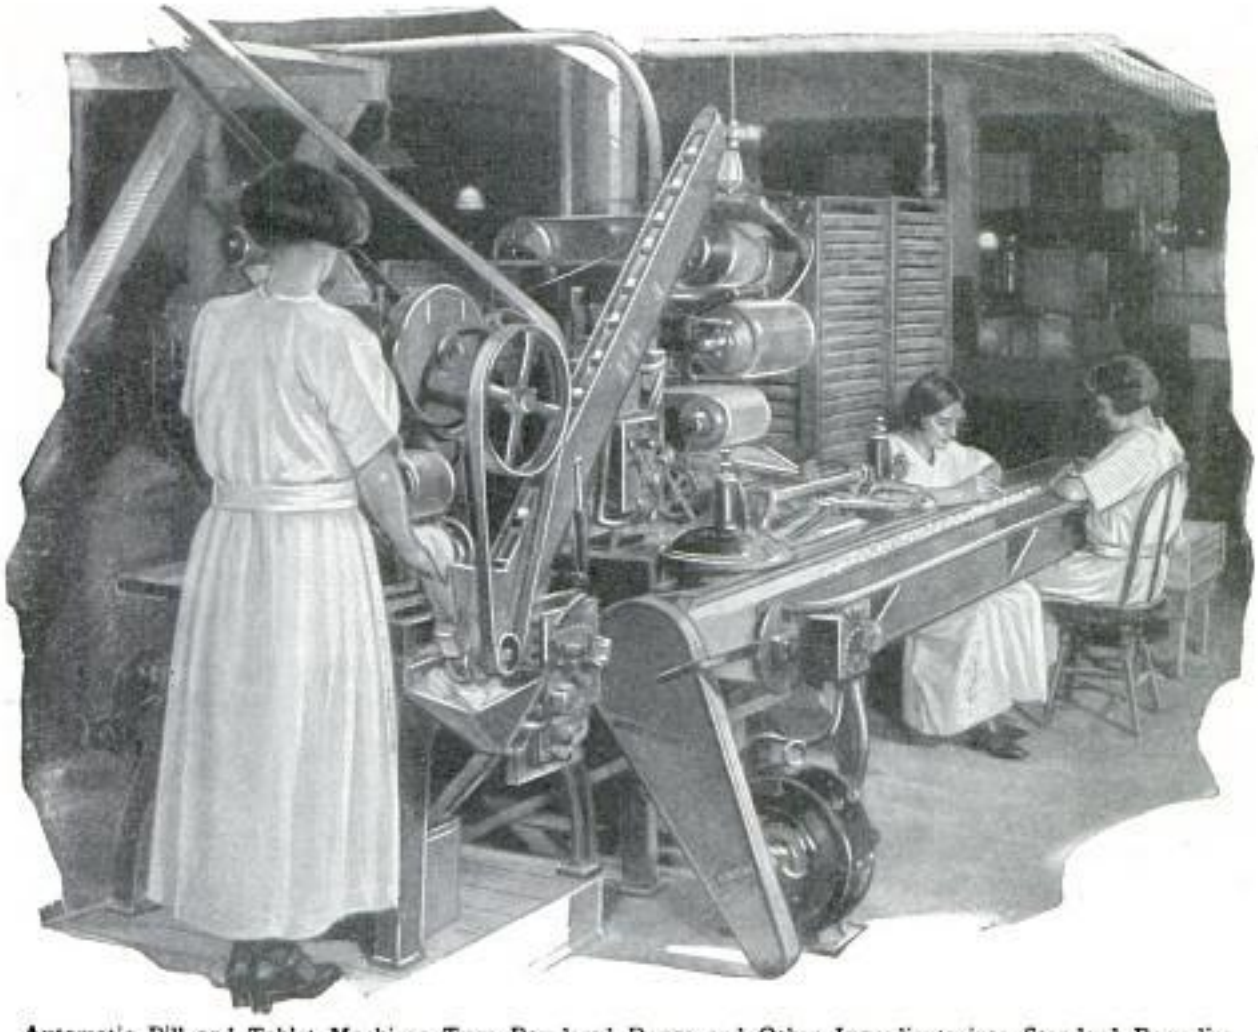

Automatic Pill and Tablet Machines Turn Powdered Drugs and Other Ingredients into Standard Remedies for the Doctor's Kit

tions. The backwoods people of the hill country still gather and dry their own herbs for home use, and sell the surplus to the itinerant buyers, from whose hands they go to small dealers. From them come the dried roots of mandrake, the rare golden seal and the ginseng.

At the laboratories the golden seal is being cultivated and improved against the day when the wild supply will have disappeared. A small grove is set aside for it, since the golden seal requires a deep leaf mold and shade at least half of the time. It takes seven years to grow a plant whose roots, when dug, can be held in the hollow of the hand. As the entire root is dug, the plant is destroyed each time and it takes seven seed beds to provide one bed for digging each year of the period. Digitalis is another drug which some day will be produced entirely from cultivated plants.

On the other hand, some of the medicinal plants will never lend themselves to cultivation outside their natural habitats, at least in commercial quantities, because of the peculiarities of climate required. In the drug warehouses at the plant stand rows of barrels filled with what appears to be cranberries. They are the saw-palmetto fruit, gathered from the swamps and marshes of the east coast of Florida, and dried under Florida suns to preserve their valuable oils, alkaloids, fat, rosin and glucose. In medicine, the extracts of the saw palmetto are valuable nutritives, tonics, diuretics, sedatives and expectorants.

Buchu is another rare medicine which, so far, has not been raised outside its native land—the wild mountain slopes of western Cape Colony, South Africa, where it flourishes at from 1,500 to 4,500 feet above sea level. The native gatherers climb the mountains and gather a load of a hundred pounds or so, then carry it back to the drying yard at some valley farm. The buchu bushes are usually well scattered, and the utmost yield from a full-grown one is six ounces at the time of cutting, and that drops to two ounces when dried. It usually takes a native two or three days on the mountainside to gather his hundred-pound load of buchu twigs, and after they have been dried and reduced to less than thirty-five pounds, the leaves are stripped off, and the twigs thrown

Copyrighted material

away. The leaves are then packed in bales and started overland to Cape Town, via bullock or mule cart.

After all the leaves and roots and other medicinal parts of plants are gathered into the warehouse of the drug factory, they pass through grinding and milling operations, cooking and steaming, until they have yielded their medicines.

As quantity production marks the cultivation of the plants at the laboratory, the manufacturing end resembles nothing so much as a high-speed automobile plant in full blast. Automatic apparatus produce pills and powders, fill bottles and ampules, and make capsules, while other automatic machinery seals and labels the output, and conveyor belts carry it away.

The capsule plant, which produces the containers into which many of the drugs will eventually go, alone has a capacity of a billion gelatin capsules a year. The purest gelatin, purer than that used as food, goes into the capsules, and to insure the proper texture, the weather in the capsule room is always late October. The walls and floor and ceiling are double, lined with cork; doors and windows are also double, and 750 water sprays moisten the air admitted, while electrically controlled heating and cooling coils keep its temperature at sixty-eight degrees.

Rows of slides, each bearing thirty capsule pins, all well greased, dip into the melted gelatin, arise with their coating, pass through a jet of air that sets the jelly, and then for an hour journey through the drying kiln, to come out and pass into a trimmer which cuts them off, removes them from the pins, and fits top and bottom together.

Inspectors take samples from every batch and measure them with machinists' micrometers to insure that the walls are only four-thousandths of an inch thick, for thin walls insure quick disintegration.

The atropine, henbane and cannabis extracts, if intended for sale in tablet or pill form, go with other ingredients to automatic pill machines for compressed pills, or to human pin rollers in small glass booths, who fashion them by hand in order to insure that the tablets will be quickly soluble. Machine-made tablets, being packed much more compactly, would take longer to dissolve.

The tablet forms of narcotic are sold in small glass tubes, hardly a quarter of an inch thick and just long enough to hold twenty tablets. An ingenious machine, something like a cashier's change holder, sends the tablets down in twenty rows, and the packer, with a long wire, pushes each score into a tube.

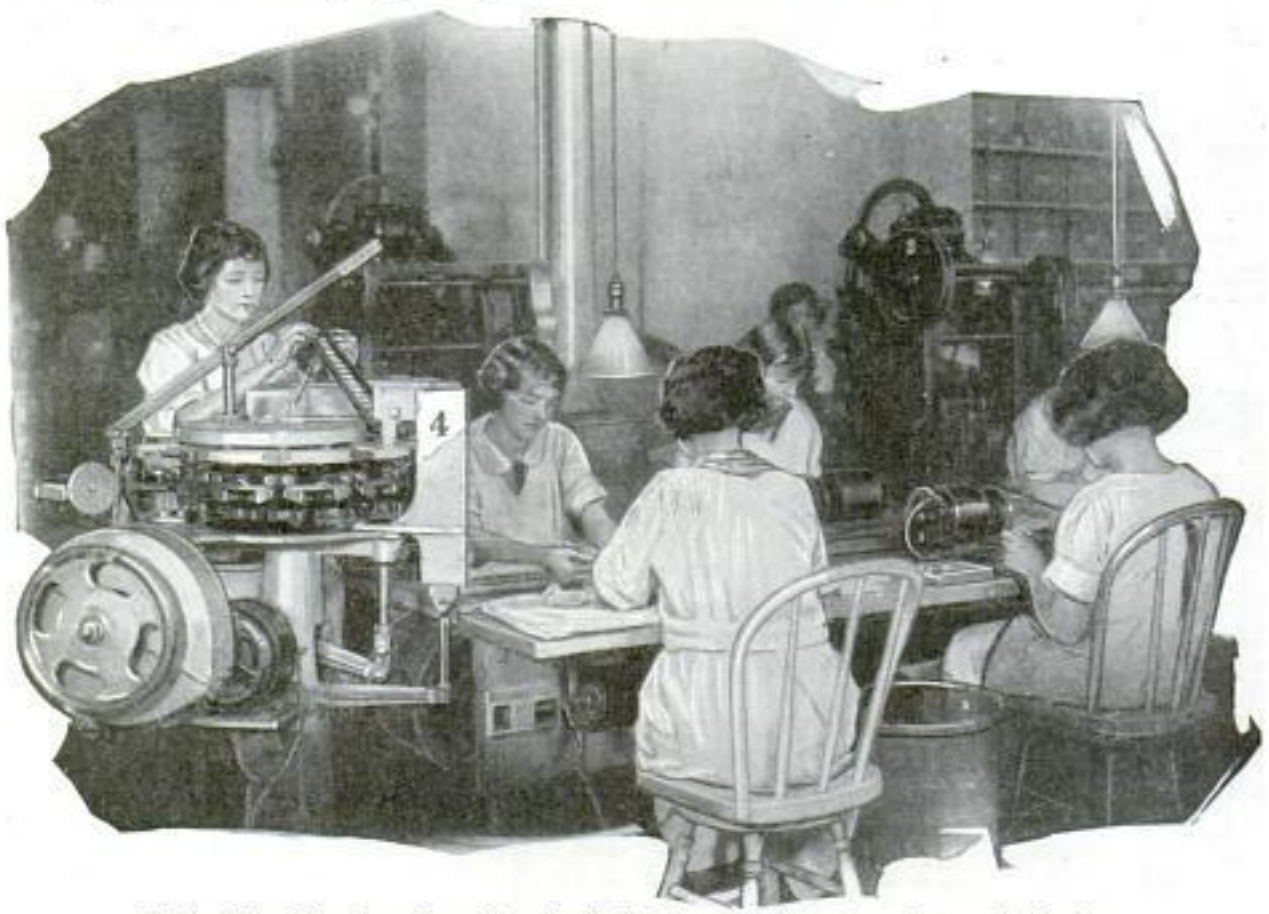

Filling Tiny Glass Ampules with a Sterile Solution of Tablets in an Automatic Machine

Copyrighted material

Automatic Conveyors as Well as Automatic Machinery Help Produce Medicines; Here the Bottled Drugs Are Passing from the Labeling Machine down the Production Line, Past Inspectors and Wipers, to the Final Shipping Point

Conveyor Systems Like Those of a Detroit Automobile Factory Convey the Various Medicines on Their Trip through the Dry Bottling Department, Which Puts Up Tablets and Powders

Photos Courtesy Eli Lilly & Co.

Copyrighted material

Racing-Boat Crew of the Warship "Wyoming" at Rowing Practice on Deck While the Vessel Is under Way; the Machine Was Built for the Purpose by the Ship's Mechanics

ROWING RACK ON WARSHIP FITS OAR CREW FOR RACES

Training facilities are provided for the racing-boat crew of the warship "Wyoming," so they can practice for contests while their vessel is under way. A heavy rack on which are strung weights attached to ropes, and designed to duplicate rowing conditions, is set up on deck during the drill hour. Under instruction of a coach, the oarsmen practice united movements and at the same time develop themselves physically. The training program was put into effect to keep the rowers fit for contests or water tournaments that might be held when the fleets reach ports. Much rivalry exists among the men of the battleships for first honors in the art of rowing, and championships of the fleets are highly valued by the competing teams and their shipmates.

FLATIRON HEAT IS CONTROLLED BY AUTOMATIC CUT-OFF

A lumber-camp furnace that he tended when fifteen years old, has brought a fortune to an eastern inventor. From the changing shape of its door under different temperatures he got the idea of a thermostat that automatically regulates the current to electric flatirons, percolators and like equipment, and his patent has been sold for a reported price of $1,000,000. The attachment consists of a small metal disk that changes its shape from concave to convex when a certain amount of heat is applied to it. This action controls an electric switch, cutting the current off when a flatiron, for instance, gets

© Keystone

Inventor John A. Spencer Adapting Regulator for Use as a Steam Trap

Copyrighted Material

too hot, and turning it on again when it has cooled sufficiently. Even temperature is thus secured, the danger of scorching the clothing is decreased, and electricity saved. The secret of the regulator and the feature that distinguishes it from similar devices is that the energy stored with a rising temperature, is let go with a snap that is said to take only sixteen one-hundred-thousandths of a second, but is sufficiently strong to turn the control switch.

CARELESSNESS AS FIRE CAUSE BLAMED FOR MILLIONS LOSS

If carelessness and attempts to profit illegally from insurance could be eliminated, an annual fire loss of about $475,000,000 in this country, or three-fourths of the total destruction by flames, could be avoided, according to estimates. The insurance companies are doing what they can to reduce the total by constant vigilance over the causes of fires and in detecting persons guilty of arson. In cooperation with the board of fire underwriters, squads are maintained in various parts of the country, like units of a state police force, to investigate suspicious blazes. Every morning large insurance companies get a list of all the fires that occurred throughout the country the previous day. These are closely analyzed, the kind of business and the owners who suffered losses being noted.

FILING BOX FOR MEMORANDA HELPS KEEP APPOINTMENTS

As a memory aid to business men, an eastern inventor has devised a file box for memoranda cards that produces the slips on the date they are needed. It is a circular holder with thirty-one compartments, one for each day in the month. Cards are inserted in slots at the top. If an engagement is three days distant, the slip will be put in slot No. 3, if five days away, in slot No. 5. By turning a knob in the center of the box, these cards automatically are picked up and thrust through the proper opening so they can be withdrawn easily and examined. There is a calendar indicator on the knob to help keep the file up to date. The device is planned especially for persons who have to handle many details.

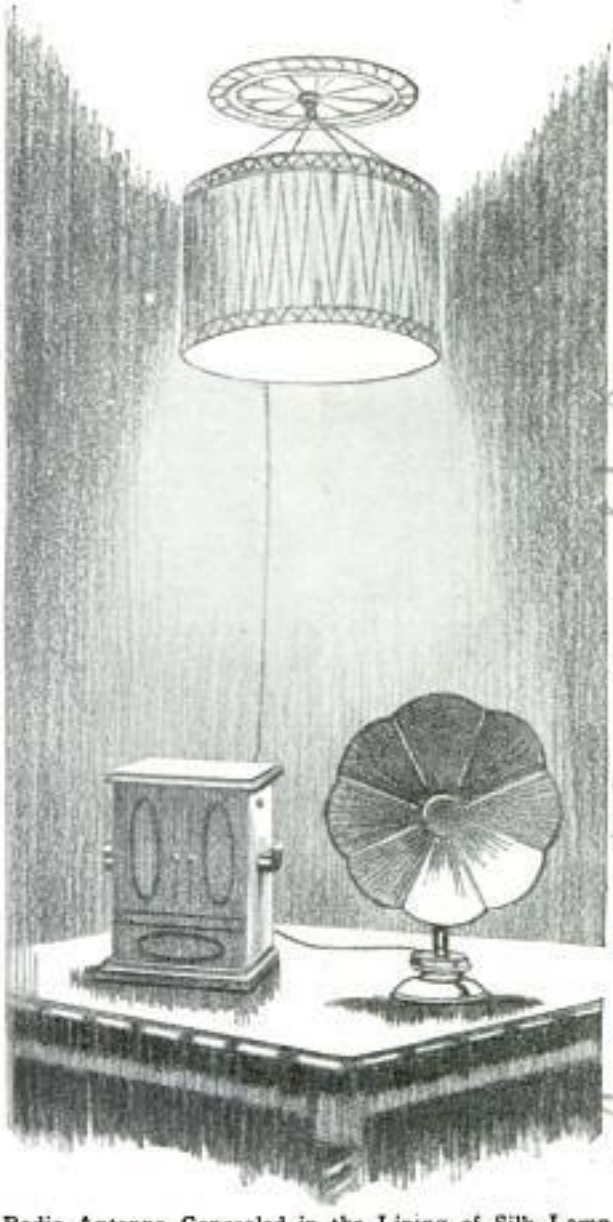

Radio Antenna Concealed in the Lining of Silk Lamp Shade Is Pleasing English Novelty

RADIO ANTENNA IN LAMP SHADE IS EFFECTIVELY HIDDEN

Within the silk lining of a special light shade a British firm is distributing, the radio antenna is effectively concealed, and the height of the holder above the set is said to increase noticeably the range of reception especially of small outfits. The shade is twenty inches in diameter with insulated upper and lower rings between which the antenna is woven in zigzag fashion. Best results are said to be obtained by fitting the shade in an upper room or hall and running the lead to the set on the outside of the house to the first floor. This gives still greater range because of the increased height.

¶More than 119,000,000 animals were slaughtered for food in this country last year, according to government figures.

Copyrighted material

TORCH TO HEAT ENGINE WHEELS REMOVES TIRES QUICKLY

Operated by compressed air, a circular oil-burning torch is in use in an eastern railroad shop to expand the tires on locomotive drivewheels so that they can be removed easily. Six jets of flame, at equal distances apart, are directed on the rims, evenly dividing the heat and concentrating it on the tire itself. The operator has constant control of both pressure and fuel. Tires can be slipped off in an average time of four minutes each, it is said, and the heater can be opened wider or narrowed to fit wheels of different sizes.

Courtesy Compressed Air Magazine

Heating Locomotive Wheel with Six Jets of Flame from Oil-Burning Torch to Expand Tire for Removal

SELF-SERVICE RADIO STORE SAVES HIRING CLERKS

Customers of a self-service radio store in Chicago can pick out parts for their sets at their leisure without bothering to explain what they want to clerks. It is operated on the same plan as an automatic cafeteria, the only attendant being a girl who makes change for the patrons. Prices are marked on placards, and the purchase money is dropped in small glass boxes with slotted tops. Customers are placed on their honor to deposit the correct sums. Besides saving time, the plan is said to increase the enjoyment of buying and hence add to the number of sales.

ANTI-RUST INSTITUTE FORMED TO COMBAT CORROSION

Scientists have started a world-wide attack on rust, the cause of an annual damage of not less than $300,000,000 in the United States alone, according to careful estimates, through the formation of a corrosion institute. It is the result of a conference among members of the American Chemical society and follows the adoption of more definite theories as to the causes of rust. Opinions on this question long have been divided. One group maintained that it was the result of electrical action; another, that it was purely chemical. In the meantime, corrosion has exacted its toll, with little check, on bridges, pipe casings, buildings, farming implements and many other articles. The institute will be at the disposal of both producers and consumers of metal products throughout the world, and the most practical ways of preventing loss from the age-old enemy of iron and other metals will be devised.

SHOE LACES OF SPRING STEEL ELIMINATE TYING KNOTS

Patented metal shoe laces that are inserted as separate units through the eyelets on one side and hook to those on the other, are being distributed by an English firm. They are manufactured in various sizes and colors and once fitted to the shoe do not have to be removed. They eliminate the bother of tying strings, disposing of loose ends, are quickly fastened, and besides giving longer service, are said to add to the appearance of the footwear and to be more comfortable.

Copyrighted material

Necessity Is Forced to Mother Another Invention

TIRED of the labor of pulling nails from old boxes, too far gone to salvage, and then cutting up the waste wood into suitable sizes for feeding under the power-house boilers, an employe of the Ford Motor company evolved a plan for doing the entire trick by machinery, chalking up another invention to the credit of necessity.

The employe, however, did not know that Henry Ford had decided several years before that that particular invention should be made by one of his men. Nor did Ford, when he made that decision, know who the inventor was going to be.

Several years ago orders went out to Ford factories and branches that all waste lumber from packing boxes, freight-car braces, and other sources which could not be utilized in any manner, should be fed under the boilers instead of coal. The order solved the waste-disposal problem and did away with the old practice of throwing the discarded stuff on a bonfire. But it had one great drawback—it cost more to pull the nails and cut the stuff up into furnace sizes than to purchase and burn the coal of equal heat value. Branch managers viewed the expensive waste disposal with dismay, and finally a western manager took advantage of Ford's periodical visit to his plant to point out the losing proposition.

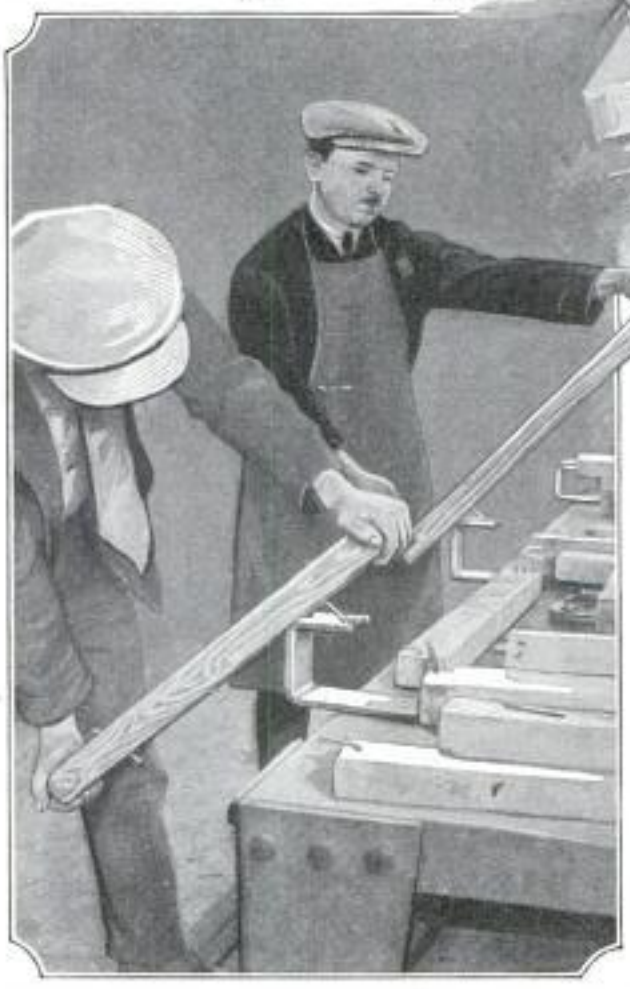

Novel Nail Puller, and, Above, Cutting Off Spikes with a Punch Press

"I know it costs more," Ford is reported to have replied, "but some day, somebody is going to get so tired of doing that job that he'll figure out a way to do it by machinery. So you just keep on as you are."

Less than a year later the somebody came through with the idea, which was simplicity itself. He simply fed the waste into a lumber-mill "hog," a machine with hardened steel knives, and there it was chewed up into sawdust. Nails mean nothing to a hard-working steel hog, and get badly chewed up, too. The combined

Copyrighted material

Scraps Dropping from Conveyor into Hog

sawdust and nails drop to the bottom of the hog, and there a ten-inch pipe, with a suction fan at the other end, draws the sawdust away, and leaves the heavier nails behind. Every hour or so a workman drops into the hog pit with an empty keg, opens an outlet door and draws off the accumulated nails. The sawdust at the Highland Park plant, is drawn up to a storage vat on the roof, and from there blown through nearly a quarter of a mile of ten-inch pipe to the power house where it is blown under the boilers in the same manner as powdered coal. Nothing goes to the hog, however, which can by any possibility be salvaged. The wood-salvage and waste-disposal plant is a structure 600 feet long and 100 feet wide. Two enormous conveyor belts run through it, which both extend for more than 100 feet at one end of the building, while one of them continues out as far at the other end, into the box-stacking yard.

At the intake end more than 170 truck loads of boxes, kegs and barrels, in which supplies are received at the factory, are delivered each day. They are placed on the conveyors and start down through the building. The first workmen turn out the larger pieces in the score or more of standardized boxes in which automobile parts are shipped. They accordingly pick off anything that can be sawed into the sizes they make. The next men make smaller pieces, and so on down the line until the smallest box part, three by four inches, is reached. Remaining sound pieces are utilized in the manufacture of specially shaped blocks and cleats for shipping and packing automobile parts, such as radiators and generators; tiny wooden forms used in the coil-unit assembly and jointed wooden mats for the entire organization. Anything that is left on the conveyor by that time is so badly splintered or damaged as to be unusable, and accordingly drops off the end of the conveyor into the gaping maw of the hog, to be chewed into boiler fuel. The workmen have made a number of other inventions to help dispose of the salvaged wood. One is a bench nail puller with a half dozen pulling claws cut in it. When a board with a nail in it is drawn across it, the nail head is caught in one set of claws and a downward push extracts the nail.

Foot-Power Press Used as Nail Cutter

Cleaning Nails from Hog after Ground Wood Is Sucked up Conveyor Pipe Leading to Boilers

Copyrighted material

8077 Chicago Daily News
4/14/25

NINE THOUSAND NEW U. S. FLAGS USED BY POST OFFICE YEARLY

Most persons do not ordinarily think of the post office department as a large consumer, but its needs for a single year include more than 1,000 different kinds of articles ranging from acids to zinc, and many are purchased in enormous quantities. For instance, 757,330 miles of two-ply jute twine were ordered for the fiscal year that ended June 30, just to tie the letters into bundles, besides millions of yards of larger sizes of string, 30,000 pounds of cotton rope and 75,000 pounds of lacing cord for the mail sacks. Nine thousand new flags were needed to replace those that had faded or worn out. It took 4,000,000 cards to examine the railway mail clerks. The 52,000 post offices required 160,000,000 envelopes, 11,300 new letter and package boxes and 16,500 letter-box posts. Clerical departments called for 1,728,000 feet of typewriter ribbons, 4,323,000 sheets of carbon paper, 55,500,000 paper clips and 150,620 dozen pencils. Toilet necessities included 420,000 cakes of soap and 108,000 towels.

LOCK ON GAS COCKS PREVENTS ACCIDENTAL OPENING

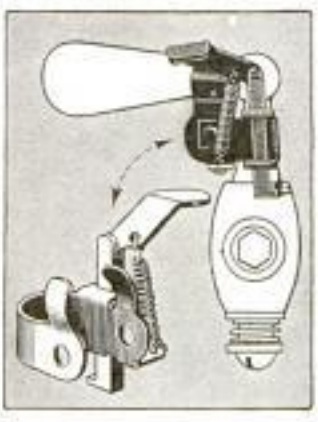

Attachable to gas stoves, ranges or heaters, a patented safety lock prevents children or others from accidentally opening the cocks. It operates automatically, when the gas is turned off, by means of a spring and lever against the knob. It is simple to install, only one screw being needed, and for this reason is not likely to get out of order.

LIGHT METAL BOAT FOLDS UP ON AUTO RUNNING BOARD

For hunters, fishermen and others, a lightweight, collapsible metal rowboat, which can be carried on the auto running board, is now being marketed. It is manufactured in two sizes, the smaller thirteen feet long, with a beam of forty-two inches and weighing 140 pounds; the larger is fifteen feet long, has a forty-four-inch beam and weighs 160 pounds. They are constructed in two and three sections which nest compactly one inside the other, and are non-sinkable even when full of water, as they are equipped with air chambers. Channel-iron runners to brace the bottom, an embossed deck which does not get slippery when wet and movable seats are additional features. There is ample space for luggage, the boat can be set up quickly, and accommodates two persons besides sufficient equipment for a trip of a day's duration.

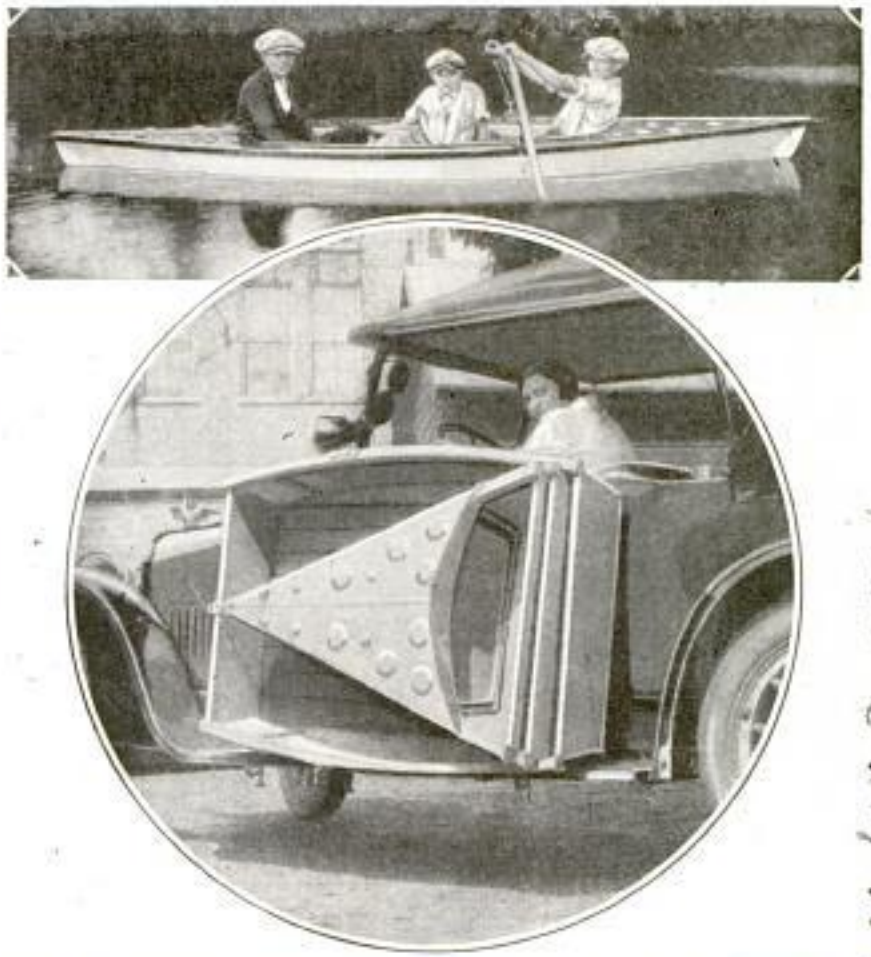

Boat Folded and Ready for Auto Trip; Above Is One of Same Kind, but of Different Pattern, as It Appears in Use

---

¶One of the requirements of policemen at the White House is that they must be at least six feet tall.

H. A. Thompson Dealer in Paints, Oils & Varnishes
Used Iron Frame 14 in 6. Blade Hack Saw Baltimore Md.
Copyrighted material

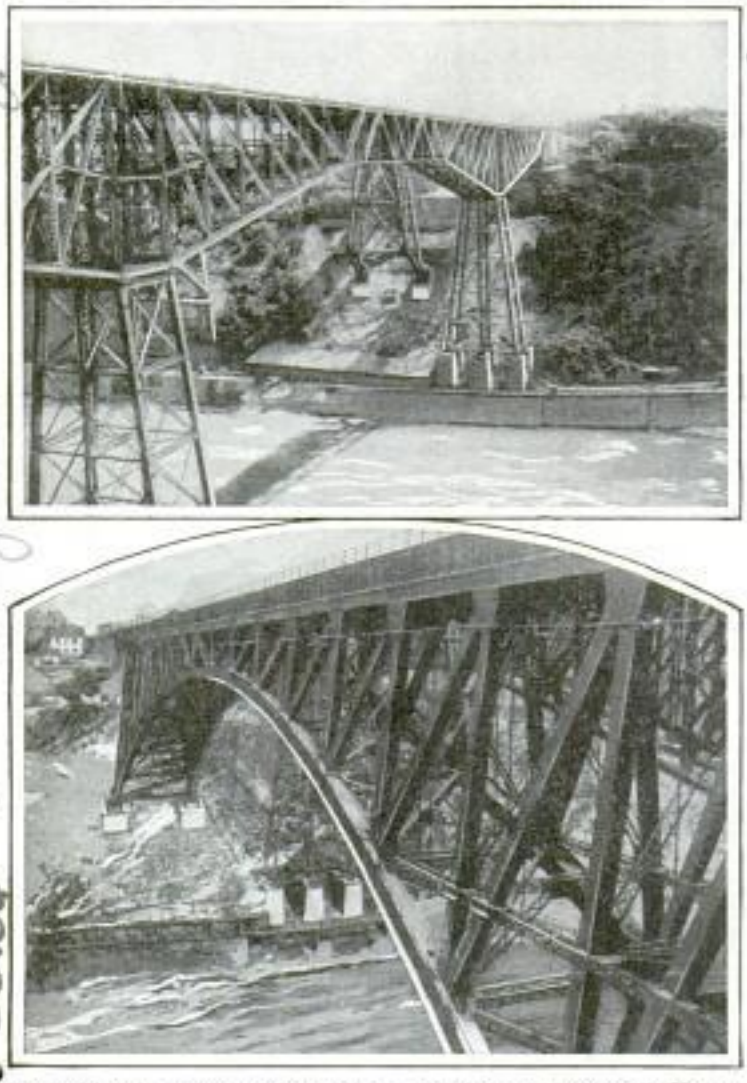

New Niagara Gorge Arch Bridge, Below, Has Replaced Upper Structure, Which Is to Be Moved

OLD BRIDGE REPLACED BY NEW TO BE ERECTED ELSEWHERE

Replaced by a more modern steel span, the old cantilever bridge across Niagara gorge is to be taken down and erected elsewhere instead of being sent to the scrap heap. Built in 1883, the structure has required reinforcement but once, owing to the increase in weight of railroad traffic which it carried. The new steel arch which has taken its place is designed to accommodate much heavier loads, but the old bridge is believed to be sufficiently serviceable for duty at some other point where the traffic is lighter and the strain proportionately less.

¶Some ninety-four tornadoes occur in the United States every year. The death toll from these was nearly 550 in 1924. This year's total will be much larger because of the great storm that swept southern Illinois, Missouri and Indiana last March, claiming nearly 800 victims.

RADIO FATIGUES EARS TESTS SHOW

Ear fatigue from listening to radio has been revealed by tests held in the experimental laboratory of Princeton university. Contrary to the general belief, that the ears do not get physically tired, the investigations showed a noticeable reaction after the hearing of a subject had been directed on the sounds issuing from the wireless receiver. Strains from oscillating tubes were conducted to both ears of the patient in equal volume, then only one ear was permitted to hear for a minute. The sounds were again applied to both organs, and it was found the subject noted a decrease in intensity on the side which had been used alone. It is thought the findings of the experimenters will result in the development of a method whereby defective hearing may be improved or corrected by introducing series of special sounds capable of being heard by the patient.

METER CHECKS CALLS ON AUTOMATIC PHONE

Outgoing calls made on an automatic telephone can be counted and checked for comparison with service bills by a meter that eliminates improperly dialed numbers and wrong connections, and which may be easily fastened around the stand. Each properly completed call is recorded on a miniature numbering machine as the user hangs up the receiver. When connection is made with a wrong number, the device is prevented from registering by a small attachment operated by the subscriber, which also permits the receiver arm to be worked up and down without affecting the counter. The meter eliminates the need of keeping a list on which to mark each call. Its presence does not interfere with the working of the instrument, and it may also be used on the ordinary telephone.

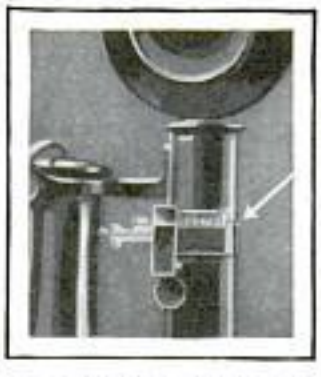

2906

Doing *the* "Impossible"

Examining a Short-Distance Rangefinder for Measuring Width of Canyons and Height of Mountains without Use of Rod and Chain

IF a scientist in the United States geological survey wants an instrument that will accomplish the apparently impossible, the call goes out for R. L. Atkinson, mechanic extraordinary of the bureau's instrument shop. His specialty is doing what every one else says can't be done, and in the five years he has been in the government employ, he has achieved a long list of victories.

Not long ago he took a piece of special metal turned out by one of the steel companies, and which was not only non-corrosive, but practically non-workable, and turned it into a special container for a thermometer used in taking temperatures in deep oil and water wells. When the officials of the steel company saw the work on the holder, they wrote, "we have never been able to machine this metal to such a fine measurement as was produced in this holder by your expert mechanician."

Machining the hardest known metals to unheard of degrees of accuracy is an old story with the expert of the geological instrument shop. He is at work now on what he expects to be the world's most precise telescope for level work. It will be used in obtaining accurate levels, the last word in differences in elevation. Every surveying instrument in ordinary use is slightly inaccurate because the exposure of their metal parts to sun, moisture and sudden temperature changes causes minute expansion and contraction. Atkinson's telescope is designed to eliminate these errors through the use of a new metal alloy which is practically "dead" to the effect of heat or cold. The expansion or contraction caused by a change in the temperature of one degree centigrade is figured at twenty-two hundred-millionths of an inch.

© National Photos

R. L. Atkinson and an Iguana, a Large Tropical Lizard, Shot by Him on a Hunting Expedition

Atkinson is only thirty-six years old, but in the last twenty years he has worked a bit in every machine trade from rebuilding locomotives down through fine engraving to watchmaking. He was a foreman of railroad and steam-shovel engine repairs on the Panama canal job as soon as he was old enough to pass the civil service examination, and, though only twenty-one, proceeded to invent a special tool for boring out both joints of a throttle at the same time, doing two days' work in one hour's time. At

Copyrighted material

twenty-four, he had exhausted the possibilities of the canal work and was back in the United States as assistant master mechanic of a Virginia railroad.

His present job as instrument maker for the geological survey dates from 1921, and he already has a long list of inventions to his credit, most of them, since government employes cannot patent their ideas, remaining his own secrets.

After completing his remarkably accurate temperature recorder for deep wells, which was his own invention, he produced the first exact rangefinder for short distances, vertical heights and horizontals. Ordinarily surveyors confronted with a deep canyon to measure, are forced to send a rod man across with a target at which to sight and then take cross bearing from two measured points. With the Atkinson rangefinder the surveyor focuses a telescope at one end of the rangefinder on any object on the opposite side, and then brings a telescope at the other end to bear on the same object. Both telescopes have micrometer head-screw adjustments, and when the cross wires are in line the angle reading is taken, and, as the base is known, a simple problem in triangulation gives the distance. The same instrument can be used to measure the distance between two horizontal points, or the height of a mountain. It has also been used in cave-exploration work, where a spotlight is thrown on wall or ceiling to measure heights and breadths.

Another of his inventions is a high-pressure apparatus for calculating the amount of oil in shale rock, or determining the porosity, or total pore space, in various kinds of rock. He made his own patterns, had the parts cast of phosphor bronze, and turned them up and assembled the apparatus. In using the instrument to determine the oil content of shale rocks, the shale is first weighed and then put in a cylinder, which is filled with water and subjected to a pressure of 3,000 pounds to the square inch, forcing the oil and water out of the rock. The oil is then separated from the water and weighed, giving a basis for computing the oil per ton of rock. The apparatus is also used to calculate how much water can be absorbed by the pores of building stones, information which is particularly valuable when selecting foundation material.

Atkinson's inventions cover a wide range. When a geological survey party prepared to make a trip through the grand canyon two years ago to survey the course of the Colorado river it was suggested that a radio set be taken along to keep the party in touch with the outside world during the several weeks they were down in the canyon. One of the largest radio manufacturers in the country declared no set could be built to work in the mile-deep canyon, where temperatures rose to 110 degrees by day, and where dry electric storms were daily occurrences. But Atkinson went to work and built a set, and it did work. The surveyors had daily news and musical programs, on one occasion picked up a broadcast warning of a cloudburst up the river and were able to move boats and equipment to higher ground before the flood reached them, saving both the equipment and their lives.

His success as an inventor and mechanic he attributes to his varied career, for many years never remaining in one position longer than was necessary to master all its details.

This Simple Little Outfit Measures the Pore Space in Oil-Bearing Shale, Building Stone and Other Materials by Squeezing Them under 3,000 Pounds' Pressure

Copyrighted material

PIGS GRAZED IN CORK FORESTS TO AID GROWTH OF TREES

The novel experiment of pasturing swine herds in the cork forests of Spain as a means to protect the trees against the encroachment of underbrush, is claimed to have proved successful. In the past, cork farmers have lost thousands of dollars every year owing to the undergrowths' draining nutriment from the soil and robbing the trees of their full amount of nourishment. At first the herds were hired from their owners by the foresters to feed upon the fruit of the trees, but the stock thrived so well on the fodder that the growers now charge rental fees for the pastures. Besides keeping the undesirable vegetation in check and increasing the cork yield per acre, the profit from the feeding grounds is said to add greatly to the revenue of most of the cork-growing enterprises.

PORTABLE OXYGEN TENT ON COT AIDS PNEUMONIA TREATMENT

Pneumonia patients are given oxygen treatments in a portable tent that fits tightly under the mattress of the hospital cot and is suspended from a cross rod above. The gas is administered from a tank with control gauges, through rubber tubing. Windows on both sides of the tent permit observation of the subject and let in light. The outfit is easily adjusted and can be used in almost any room.

Pneumonia Patient Receiving Oxygen Treatment in Hospital Ward While Resting Comfortably in Tent Attached to Cot

OVERALLS PUT ON LIKE A COAT CLASP TO FORM TROUSERS

An overall suit which can be put on without lifting the feet to enter the trousers, can be donned as easily as a coat. When in place, a clasp arrangement may be buttoned to form separate leg coverings, resulting in a roomy one-piece suit that protects the clothing and leaves the limbs free. The garment, which is made of strong material, may be folded into a small package, and because of its simple adjustment and loose fit, makes a handy garb for carrying in a motoring equipment. In emergencies, the overall suit can be donned in a few seconds, and when taken off, leaves the clothing clean and free from wrinkles often caused by tightly fitting overalls.

Coatlike Overall Suit Spread Open, and as It Appears While Being Worn

GASOLINE MEN CAUSE FAMINE IN DOLLAR BILLS

The increasing number of automobiles in use is given as one of the principal reasons for a shortage of dollar bills. Purchasers of fuel and oil at filling stations usually use paper money as the medium of exchange. The gasoline dealer handles the bills with greasy hands which quickly deface the bills, necessitating their early return to the treasury. The average life of paper money has been about eight months, but this is rapidly diminishing, it is said.

Copyrighted material

2996

Typical Chinchilla Rabbit, Above, and a Jacquette Manufactured from the Skins of Animals Raised in the West

A Wool-Bearing Angora-Rabbit Buck from the Farm of Lady Rachael Byng, Wife of England's Famous War Hero

Real Live Chinchilla Lanigera, Rare South American Animal, from a Herd Now Being Raised in California

White Angora Rabbit, Right, with Full Crop of Fine Wool Ready to Be Plucked and Sent to Spinners; Below, a Himalayan Rabbit Doe, Whose Pelt Will Go to Help Furnish Milady with a Fine Imitation-Ermine Wrap

Courtesy Golden West Farms

Copyrighted material

Growing Fur Coats on Farms

WHEN milady wants a new fur coat, or the aviator orders a nice fur-lined flying suit a hunter or trapper doesn't depart for the wilds, to spend the long winter months, undergoing cold and privation, to trap the fur.

Instead one of Uncle Sam's twelve-hundred-odd fur farmers walks down to the pens after breakfast, picks out a few likely-looking animals, examines their pelts carefully to determine their value, and proceeds to gather in the best of the lot to be converted into coats, neckpieces, flying suits, lap robes and other articles.

Fur farming nowadays is as much of an organized business as any kind of live-stock raising. The growth of the industry in the last twenty-five years has been notable. From early efforts toward raising foxes, the fur farmers have branched out until nearly every sort of marketable fur is being grown at home in farm pens. Silver foxes continue to lead, with more than 500 farms devoted wholly or in large part to them, but the list of farm-grown fur animals includes also blue, white and red foxes, marten, chinchillas, fisher, mink, raccoon, muskrat, several varieties of rabbits, and even the seals of the Pacific ocean are farmed by the government at the Pribiloff islands. The silver-fox ranches alone have more than 15,000 animals in captivity with an investment value of $8,000,000, while the total in all kinds of fur farming is estimated by the department of agriculture at between $12,000,000 and $15,000,000. What the total annual output of all the ranches is no one knows, since fur-farm statistics are still incomplete, and total-sale figures include both wild and farm-grown fur. The returns, however, are enormous, the department of agriculture estimating that no form of live-stock raising pays such dividends on the capital invested.

The great value of silver fox pelts is due to the fact that it is virtually impossible to substitute a skin of some cheaper animal for the genuine article. The difficulty in faking lies in the silver guard hairs, from which the animal takes its name. Each silver hair is really of three colors, in a white, gray and silver combination of bands, and it is this color banding which prevents dying guard hairs in another pelt to make a fake silver.

The ranch-raised foxes become very tame and are handled as easily as dogs. Each pair has a wire cage containing from 650 to 1,500 square feet, and a kennel or

Copyrighted material

Wearing One's Furs Alive on L. O. Holman's Raccoon Farm, Where the Animals Are Trained as Family Pets

den, which sometimes is constructed underground, and at other ranches above ground, usually with double walls as a protection against cold. The larger ranches are usually laid out, if the ground conditions permit, like the spokes of a wheel, the rows of cages stretching away in every direction from a central lookout tower. During the breeding season, and until the pups are big enough to come out in the open, the foxes are very shy, and the lookout tower permits the rancher to keep watch over his animals without annoying them by his continual presence. During the season from early in the year until late in April visitors are not admitted to the ranches, and the workmen who care for the animals even wear the same clothes through the entire season in order that no strange odors may alarm the animals.

Many of the mother foxes are permitted to raise their own young, but in the case of nervous animals, which may injure their pups, the litter is removed and placed in charge of a house cat. Some ranches keep as many as twenty or more cats for this purpose.

Raccoon, mink and muskrat are raised by several ranches successfully, and in the northwest experimenters with fisher and marten are reporting success, although the supply of ranch-bred animals is still limited.

Blue foxes and the rare white fox are being ranch-grown in Alaska, where the wild supply of fur-bearing animals has been much depleted. Alaska is well suited for fur farming. The cold winters produce prime fur, the islands which dot the

White-Fox Fur Neckpiece, Made from Skins Produced on an Alaskan Ranch

© U. & U.

Fisher, One of Six Rare Ones, at Rest Island Silver-Fox Farms

Copyrighted material

2996

Beaver, Above, Farmed in a Marsh; and Right, Two Silver-Fox Pups

coast present isolated sites from which the animals cannot escape, and food is plentiful and cheap. The salmon industry offers cheap food in the summer, while thousands of rabbits are killed, the meat dried and pulverized, and stored in sacks for future feeding.

The biological survey has a unique fox-farm industry on the Pribiloffs in connection with the seal-fur work conducted there. The seals may be said to be farmed, since the government has a monopoly on the business and owns the rookery islands where the seals come each spring. The government is careful to protect the seal herds, and each spring, before killing starts, a government official, mounted on a tall tripod, takes a careful census of the animals and determines how many bulls of each age may be slaughtered. Cows are never killed, except by accident. As fast as the seals are killed and skinned the carcasses go either to the seal-oil factory, or else are salted and packed away in a peculiar kind of silo, built into the side of a hill. During the summer the immense packs of blue foxes run wild on the islands, living off such food as they can get for themselves. When winter sets in, the time comes for feeding. A spring is diverted into the silo and the water allowed to run through it for several days, until the salt is washed away. Then the

Tame Silver Foxes at the Hercules Fur Farm

Copyrighted material

Pair of Pups, Full of Curiosity But Not Sure of Their Legs, at the Rest Island Silver-Fox Farms

meat is placed out in the open for the foxes. Several days later the meat supply is moved to a big wire cage during the night, the cage door remaining open. Soon the animals become used to entering the inclosure to feed. A man is stationed in the trap building, and as fast as the cage fills up with anywhere from a dozen to fifty animals he pulls the rope, closing the door. The foxes are then shooed into the trap house, the door is again opened, and another cage full caught. In the trap house the animals pass from the receiving room on into a retaining room, and from that through a small door they go one at a time into the killing and skinning room. As the native skinners catch up each animal, a government agent examines its coat to make sure that it is in prime condition, and, if the fox is a female, decide whether it shall be freed for breeding purposes. The latter are turned out through a release trap, and the others killed and skinned.

Rabbit farming, producing cheap pelts which may be converted into imitations of many rare furs, including ermine and chinchilla, has also become quite an industry, particularly in California. By careful selection and breeding several varieties have been developed which are easily converted into imitations that defy detection by anyone but an expert. The raising of angora rabbits is also proving a profitable side line, since the angora yields its fur without the necessity of killing. The animal gets its name from the resemblance of its fur to the wool of the angora goat. The

Baby Raccoon Raised by the Bottle Route

Typical Fox Farm Layout, One of the Pontiac Strain Units

Copyrighted material

2996

wool is plucked four times a year and sold to be converted into fine woolens, much prized for baby blankets and other finely made articles. These rabbits require considerable attention, however, since each one must have his wool combed every few days to keep it from becoming matted. A chinchilla-type rabbit has also been produced by fur farmers, and one of them has succeeded in transplanting the real animal from South America.

With the exception of rabbits, most of the fur ranches require a locality where the winters are fairly long, and cold, to insure prime fur. Hot summers are not a detriment, provided the winter season is long enough for the fur to develop. In fact, the climate in Michigan, Wisconsin and New York has proved better for fox ranches than places farther north, since the warm spring gives the early-born young a better chance to live.

Success in any of the fur-farming lines requires considerable knowledge of the habits of the animals, their care, and sufficient capital to last over the early years of getting established. The rancher must also be well grounded in scientific breeding, since inbreeding is fatal to the stock. The best ranches carefully mate an animal that is deficient in one point and strong in another, to one that is strong in the first and weak in the other, in order to insure that their offspring will strike a better average in both.

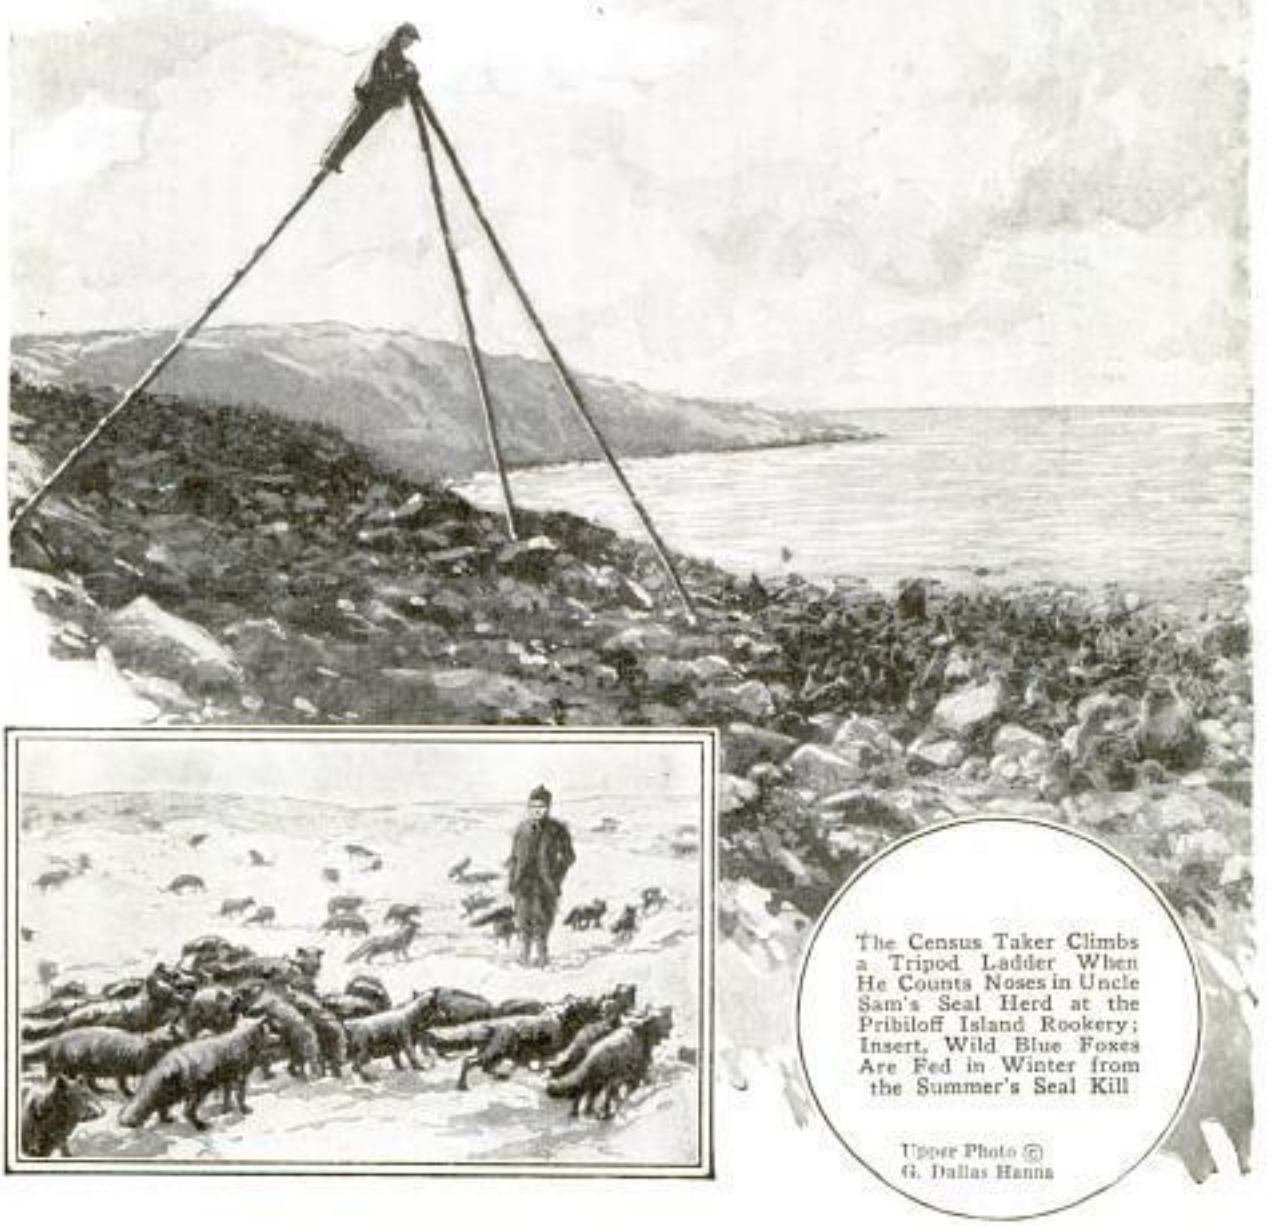

The Census Taker Climbs a Tripod Ladder When He Counts Noses in Uncle Sam's Seal Herd at the Pribiloff Island Rookery; Insert, Wild Blue Foxes Are Fed in Winter from the Summer's Seal Kill

Upper Photo © G. Dallas Hanna

Copyrighted material

PROPELLER FOR BOAT OR PLANE ALSO ACTS AS RUDDER

A propeller, capable of driving either airplanes or water craft and said to dispense with the need of a rudder, has been invented by Prof. F. K. Kirsten, of the University of Washington. Installed on a vessel, the driver can be operated with equal success for forward or reverse movements. As an aid to steering, the apparatus is claimed to serve as a rudder, permitting more complete control of the directional motion of the ship, without impeding the propelling power. One of the propeller-rudders, fitted to a seventy-foot boat, has been found to produce greater ease of steering and a more accurate response to the helm.

Combination Propeller and Rudder Which Can Be Adapted to Either Water Craft or Airplanes

RADIUM BATTERY EVERLASTING

The possibilities of a form of electric battery which would be practically everlasting were discussed by J. B. Kramer, a British scientist, recently. The new cell uses a radioactive material such as monazite sand in place of the usual chemical electrolyte. It was found that if the space between the two plates of different metal was packed with radioactive material, a steady current was produced. With zinc-carbon elements, a potential of more than a volt was obtained from a single cell. The duration of the life of the battery would presumably be limited only by the life of the radioactive substance used.

AUTOMATIC BOX-CAR DUMPER DOES WORK QUICKLY

To reduce the cost of emptying grain from box cars and allow them to be released quickly for service, an automatic unloader has been designed which completes it work in three and a half minutes. As the car is run onto the tilting track, a special attachment on the machine lifts the grain door, and the car is tipped sidewise and the contents poured into a gigantic hopper. To remove the material from the ends of the carrier, it is turned endwise at an angle to force the grain toward the center and out the door. After the unloading operation, the car is replaced on the track and the loosened door automatically deposited on the floor undamaged. With proper haulage facilities, it is claimed the unloader can handle sixty-four box cars in a working day of eight hours. Two electric motors operate the machine, one of which does the side tipping, while the other tips the cars endwise.

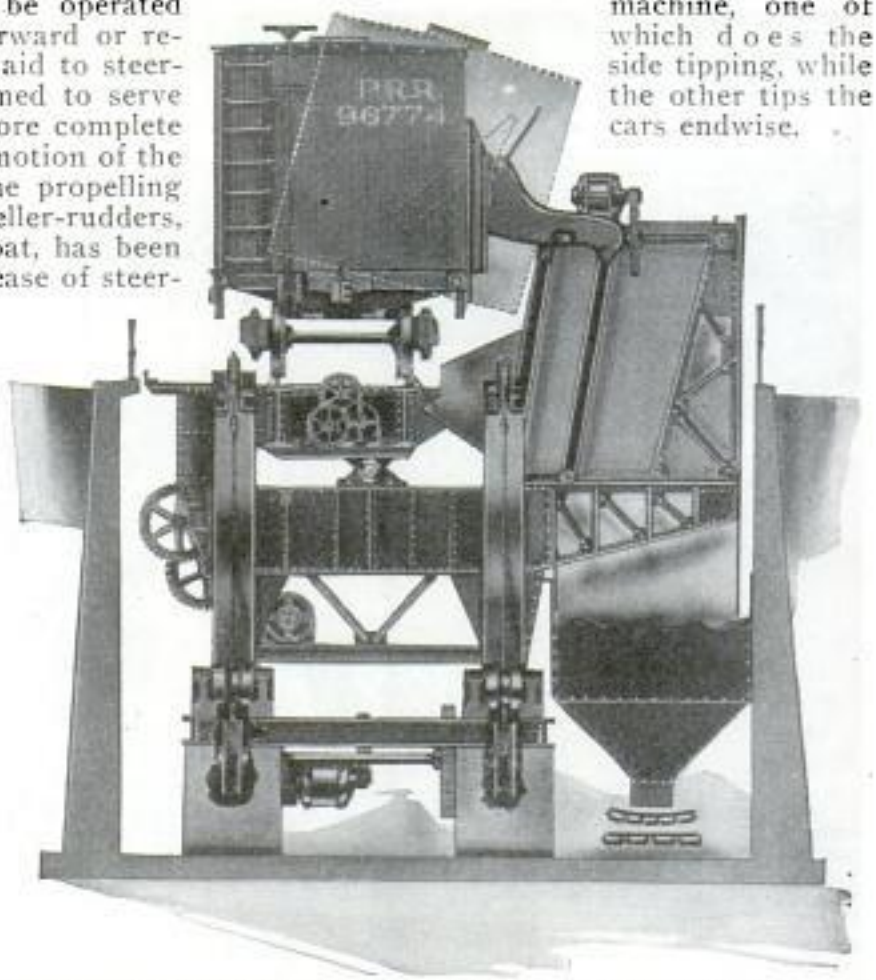

How the Automatic Grain Unloader Tilts a Box Car to Empty It; Three and a Half Minutes Are Required for the Operation

Copyright Popular Mechanics

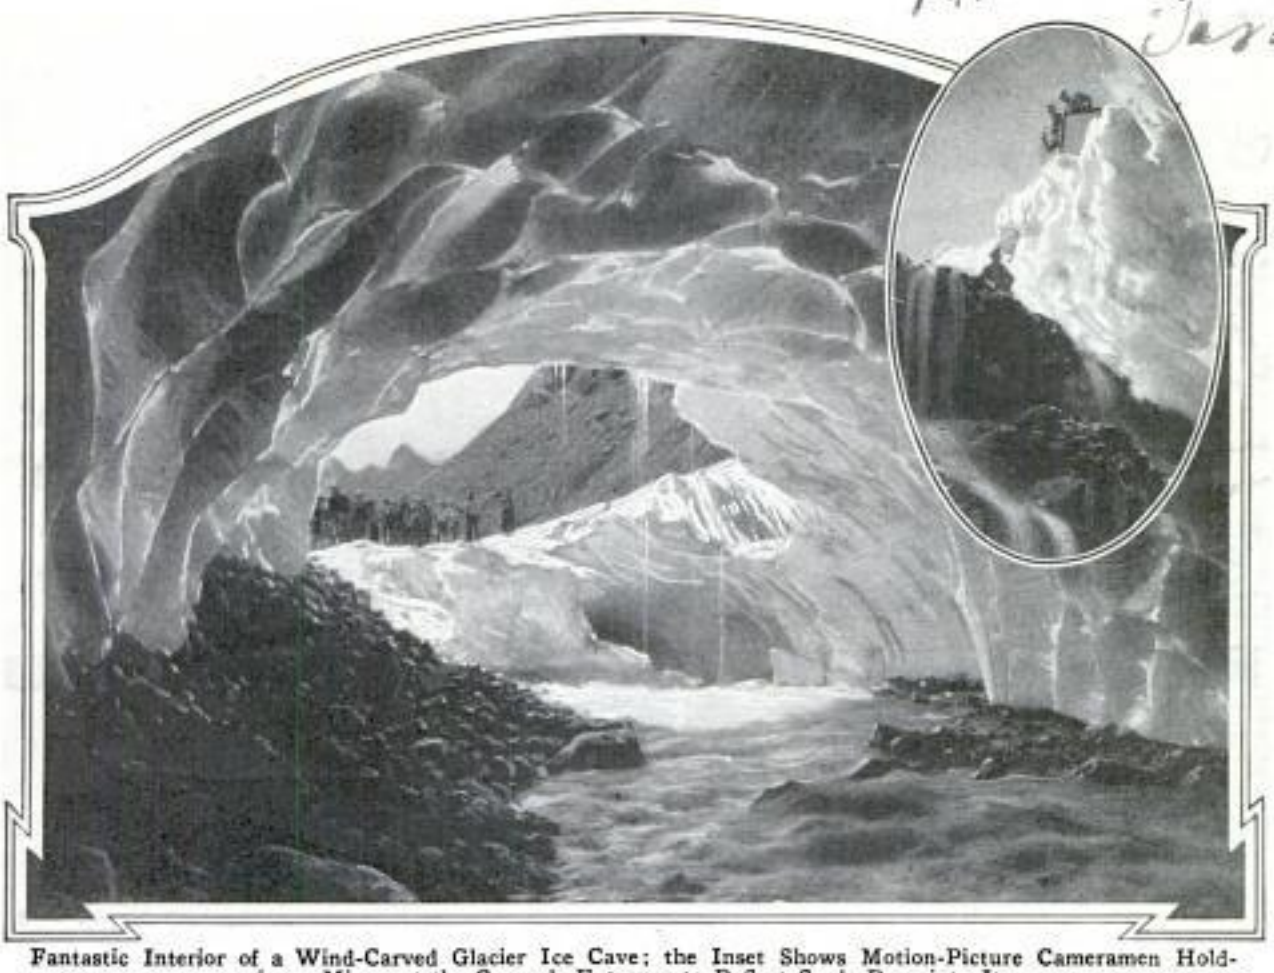

Fantastic Interior of a Wind-Carved Glacier Ice Cave; the Inset Shows Motion-Picture Cameramen Holding a Mirror at the Cavern's Entrance to Reflect Sun's Rays into It

ICE CAVES LIGHTED BY MIRRORS FOR TAKING MOVIES

By the skillful use of mirrors, a motion-picture company not long ago obtained spectacular views of the inside of several of the beautiful wind-carved ice caves of the Nisqually glacier in Mt. Ranier national park. Men at the entrance to the caves, held the glasses in such a way that the sunlight was directed to the interior where the cameraman was stationed. Other mirrors picked up the reflections and cast them back against the rocks and the grotesquely outlined ceiling of the cave, bringing out the deep etchings that the wind and warm air currents had carved in the ice. Considerable danger attended the task as great pieces of the glacier broke off from time to time while the men were at work. The caves have not been accessible for several years, it is said, and only three consecutive warm summers made the feat possible.

¶There is now an automobile for every horse in the United States, and by the end of this year, it is estimated, the number of cars will be considerably greater. Ten years ago, there were nine horses to one auto.

LINER GAUGE FOR TYPESETTERS IS EASILY ADJUSTABLE

A variable liner gauge for typesetting machines that cast lines in a solid piece, can be adjusted for any of forty-six different measures and is said to replace the large number of gauges usually required with composing outfits. The liner, which is patented, can be quickly set to a size, and is provided with a micrometer screw for adjustment to bastard measures. Owing to its special design, the gauge is claimed to eliminate the breaking of slugs through careless operation of the machine. Even where the cap on a mold is warped or bent, the gauge will make perfect slugs. In use, it prevents projections of metal beyond the end of the line, "back squirts" of metal caused by imperfections often present in the old-style liners, and damage caused by using the wrong ejector blade.

Copyrighted material

The Revival of Archery

IN a little shop at the rear of a dwelling in a side street of Jersey City, N. J., are made by hand most of the bows and arrows used by the foremost archers in the United States. In this age of specialization and ponderous machinery, James Duff, the proprietor, still plies his ancient craft. The wood from which the bow is fashioned is lemonwood, imported from South Africa. It is seasoned for seven years. Arrows are fashioned of Norway pine. The Flemish bowstring has been manufactured by one family in Belgium for the past 300 years. Every implement is made to order, and the purchaser specifies the poundage he wants it to register when drawn. The great skill of the craftsman may be gauged by the fact that he is rarely more than an ounce or two out of the way when he makes the first test. Although lemonwood is quite hard, the tremendous pull of the string when the bow is in use would soon cut through it. A material of extreme hardness is, therefore, necessary for the tips, and for these the craftsman goes to South America, it having been discovered that the horns of South American oxen are best suited for this purpose. Tips are cut to fit over the ends of the bow, glued in place, and then notched for the string. The Norway pine arrow stock is cut into thirty-inch lengths, one-half inch square. Arrows are made to weight, and by an ancient system. Instead of the usual avoirdupois weights, shillings and pence are used. The average arrow weighs from four shillings six pence to five shillings, and the weight is specified by the purchaser. One of the most delicate operations in the whole process of arrow making is the insertion of the turkey-buzzard feathers in the shaft. Three incisions are made at one end of the arrow. The quills are shaved to the thickness of the feather itself, and are then coated with glue and set in the cuts on the arrow's surface.

Copyrighted material

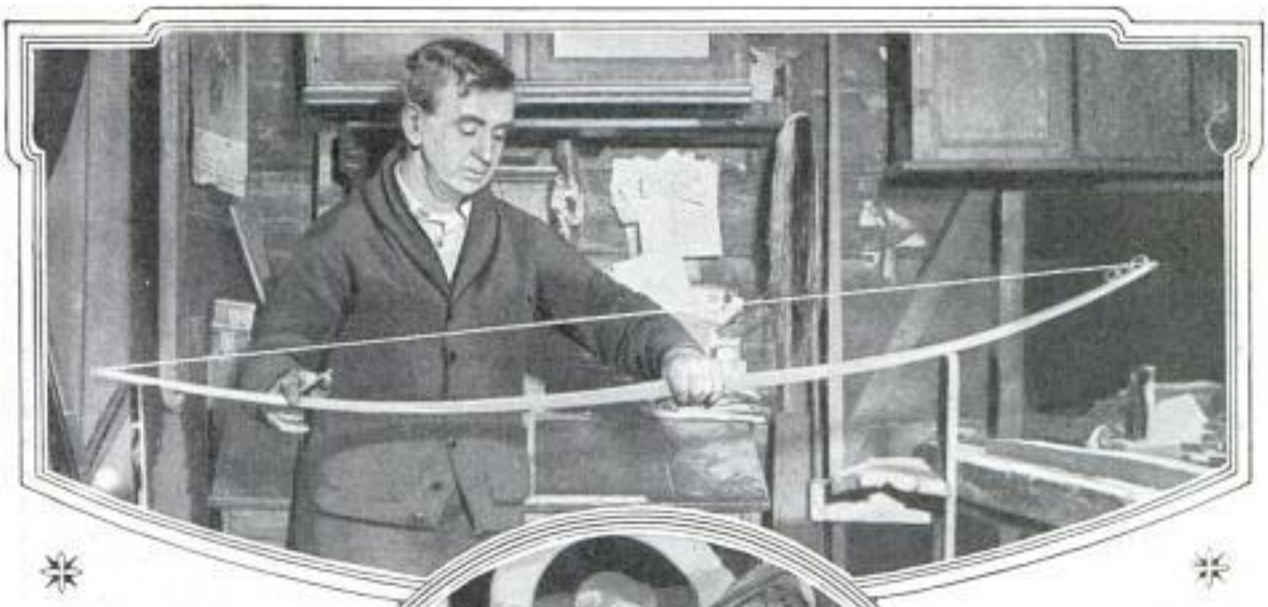

If Bows Are Too Stiff, They Are Reduced by Shaving Them Down with a Hand Scraper as Above; Below, Weighing an Arrow after the Old English Fashion of Balancing It with Shillings and Pence; the Weight Is Still Stamped on Arrows in Figures That Represent the Coins with Which They Were Balanced

Making a Target from Straw, Tied into a Thick Rope and Sewed into a Coil to Form a Back for the Painted Cover; Below, Shaping a Bow in the Rough from a Piece of Lemonwood

Copyrighted material

Bag Closed, and Open to Show Suit Laid Flat over Rack, and Drawer That Holds Accessories

V-SHAPED RACK IN HANDBAG KEEPS CLOTHES PRESSED

A "valet bag" designed to keep two suits of clothes as carefully pressed as though they were hanging over the tailor's rack, and also accommodate shoes, hats, and a supply of shirts, underwear, collars, ties, handkerchiefs and other wearing apparel, has recently been placed on the market. Slightly larger than an English kit bag, the new invention is unique in that it contains an inverted V-shaped interior rack on which the suits hang. A drawer inside the rack and large side pockets hold the other articles.

CHAMELEON CHANGES COLOR BY SHIFTING CELLS IN SKIN

Packed away in the true skin of the chameleon under the outer covering, are several layers of tiny cells, the movements of which cause the changes in color. Those at the top are filled with minute crystal-like grains that reflect the light and make the creature appear almost white. Below, the cells contain a yellowish oil and deeper still, a reddish-brown pigment. Different combinations give a whole range of colorings, and the movements are caused by contractions of the skin. The chameleon's eye is believed to effect the changes to some extent. In dark surroundings, it is lightly stimulated and little if any "turn" in color occurs. Different shades act upon the eye in varying degree, causing the chameleon to arrange its color cells accordingly.

TUBES THAT WON'T BURN OUT BOON TO RADIO FANS

Vacuum tubes for radio sets of the future may have their life prolonged indefinitely by a new filament which works at a temperature much lower than the ordinary bulbs. The material, which was described by Dr. Irving Langmuir, of the General Electric company, accomplishes its purpose without heating to a glow, and even in a dark room does not appear red under operation. By the addition of a small amount of thorium, combined with several gases, to the tungsten used in the tubes, the filament is made to operate at temperatures far below the usual danger point, avoiding overheating to the burning-out stage.

SPRING TOP FOR TOBACCO POUCH REDUCES WASTE

Easily mounted on the tobacco pouch or bag, a metal top with spring jaws that automatically close tightly and are opened with slight pressure, keeps the contents from spilling and simplifies filling the pipe or cigaret. The attachment is oval so that it fits easily in the pocket and permits the tobacco to run out in a narrow stream.

Tobacco-Pouch Top Detached and in Use in Place of Ordinary String Fastening

Foreign matter cannot get into the sack when the jaws snap shut and the bother of loose and unhandy strings is eliminated.

Copyrighted material

MOTOR PUSHED ACROSS DESERT TO SAVE AIRPLANE

Hardships of the early pioneers were reenacted with a modern twist not long ago when a 700-pound motor was pushed by hand, three and one-half miles across the burning sands of Death Valley in California and installed in an airplane that had been forced down by failure of its engine. Wooden rails were laid upon the shifting dunes, the ponderous motor, in its frame, mounted on skids, rollers were put under them and the laborious journey started. Five men accomplished the hard task without any other mechanical aids, marking their pace against a fast dwindling water supply they carried in their canteens.

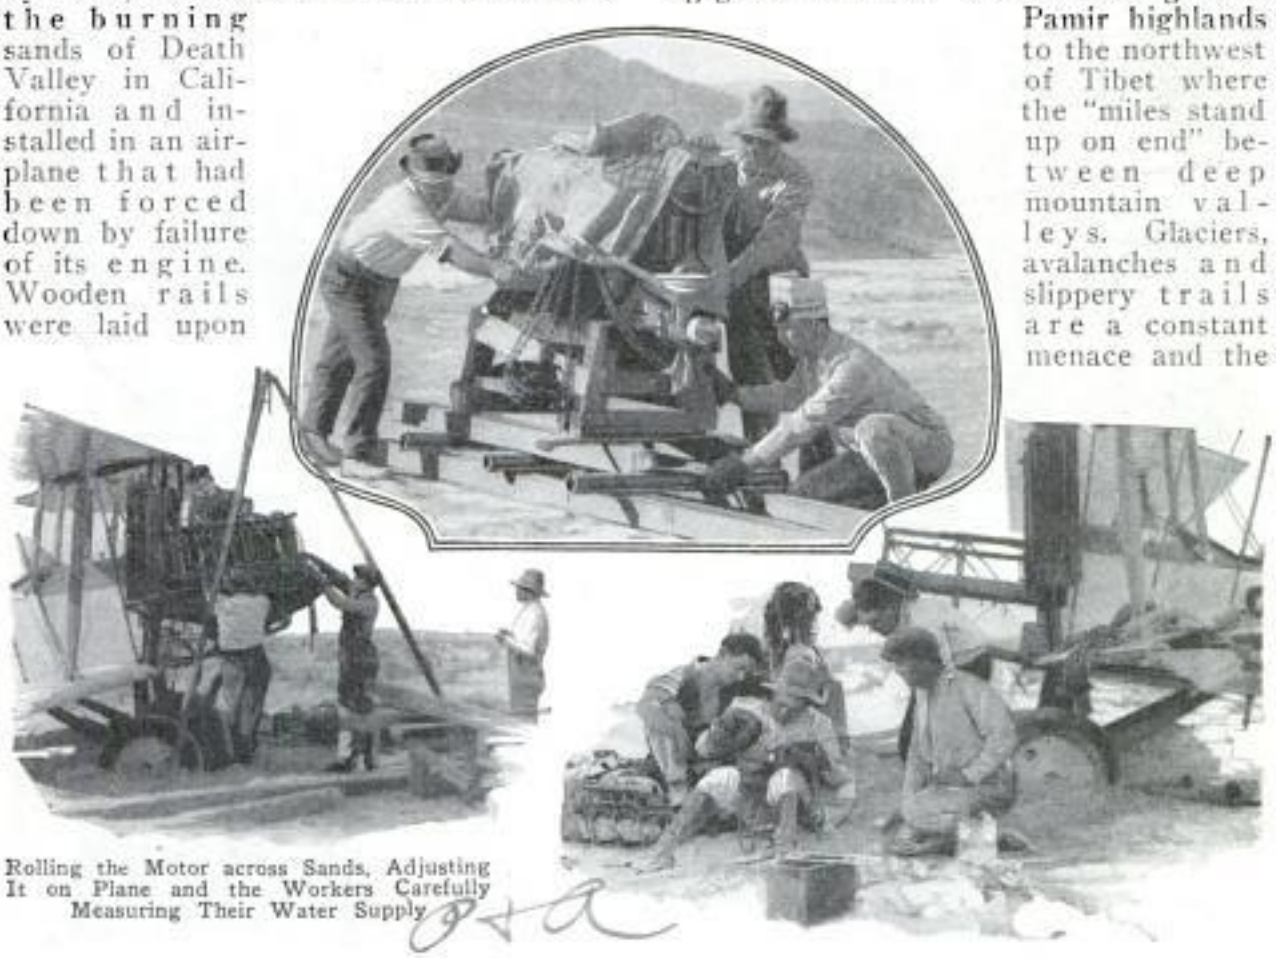

Rolling the Motor across Sands, Adjusting It on Plane and the Workers Carefully Measuring Their Water Supply

COVER ON AUTO-TIRE PADLOCK PREVENTS RUST AND MARS

Neatly inclosed in a durable leather cover, padlocks for spare auto tires are protected against rust, cannot rattle and will not chip or scratch the finish of the car. Access to the key opening is easily gained by unfastening a flap that keeps the cover from falling off.

ROOSEVELT EXPEDITION IN ASIA FACES MANY PERILS

The route of the Roosevelt central-Asiatic expedition is probably one of the most difficult in the world, according to big-game hunters. It lies through the Pamir highlands to the northwest of Tibet where the "miles stand up on end" between deep mountain valleys. Glaciers, avalanches and slippery trails are a constant menace and the high altitude, often more than 17,000 feet, causes the traveler great discomfort. Water boils at a temperature of only 178 degrees here so that foods can be only half cooked. One explorer boiled beans four days but they were still underdone. Snows and blizzards usually choke the trails to the south by the first of October, and if the travelers are delayed beyond this date their difficulties will be increased greatly, and they may have to remain in the region all winter. Scores of coolies and animals will be required to carry the needed food supplies. One of the principal objects of the expedition is to bag a specimen of a rare mountain sheep believed to be the ancestor of the modern domestic variety. Marco Polo, the famous traveler who penetrated Asia in the thirteenth century, described this animal as a large species with long horns out of which the shepherds made bowls, and even fences to inclose their cattle. Wild camels, boars, long-haired tigers, Arctic bears and snow leopards will also be hunted.

Copyrighted material

2864

With Women in the Field of Science

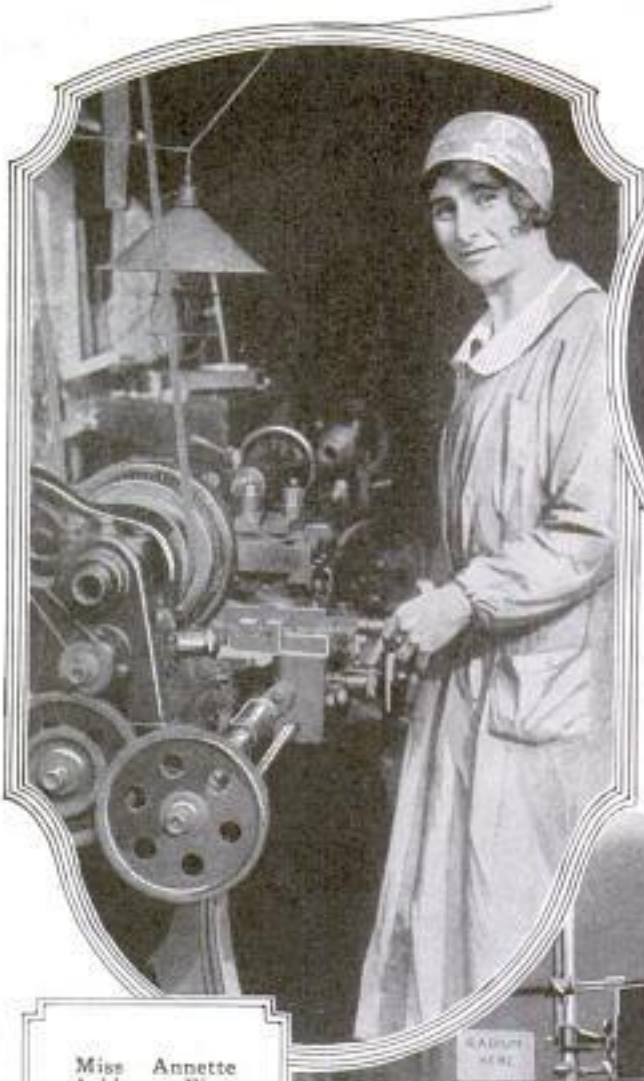

Miss Annette Ashberry, First Woman Member of the English Society of Engineers, at Her Lathe; Right, Miss M. W. Hooker, a Radium Expert

© U. & U.

Miss Olive French, Chemist of Simmons College, Analyzes Milk to Determine Its Butter-Fat Content

Miss Ethel Peyser, Household Engineer, Who Tests and Gives Advice on All Sorts of Labor-Saving Devices for the Home, Installs a Generator

542 Fifth Ave
New York City

Copyrighted material

RADIO DIAL-SETTING RECORD OPENS LIKE A FAN

Radio fans who like to keep a written record of dial settings for different stations, are spared the inconvenience of a large book or an unhandy chart in a compact card file that opens up like a fan, has spaces for the names of the cities, stations, wave lengths, dial readings, and remarks, and keeps the information in alphabetical order. It consists of a pack of ordinary index cards, properly ruled, and held together by a strong screw at one corner, permitting the leaves to be spread apart quickly without unfastening them. A back and cover protect the cards, and new ones can be added when needed. The entire record can be kept in a corner of the set.

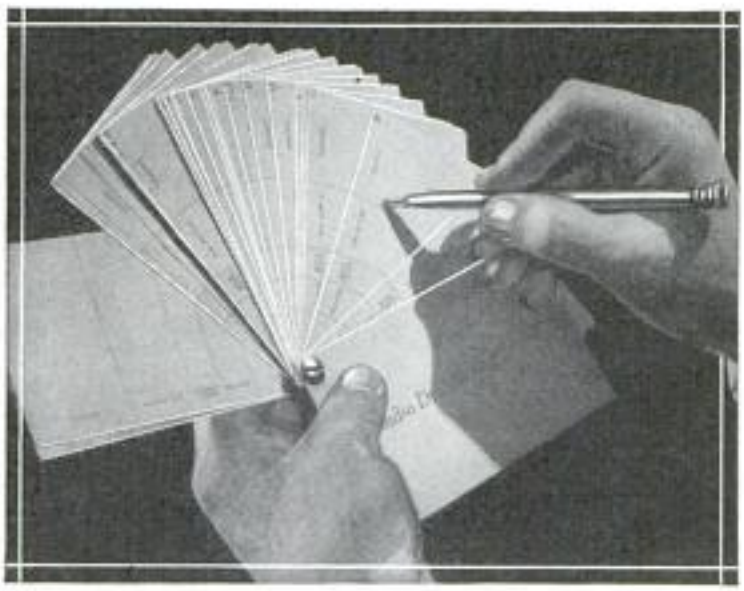

Radio Log Cards Held Together by Screw Spread Out Like Fan for Quick Reference

AIR-DRIVEN ROAD SMOOTHER SAVES TIME AND COST

Bumps and high spots in concrete roads are removed at one-tenth of the cost of hand labor, according to reports, with a portable compressed-air outfit consisting of a motor-driven compressor and drill on two wheels. A workman who never before had used the machine is said to have resurfaced thirty square feet of high spots in two hours. The apparatus is also adapted for making cable ducts in cement floors. The trench is first cut, then a thick elastic rubber tube laid in it. Concrete is next poured over it and after it has set, the rubber is pulled out, leaving the duct ready for the insertion of cables.

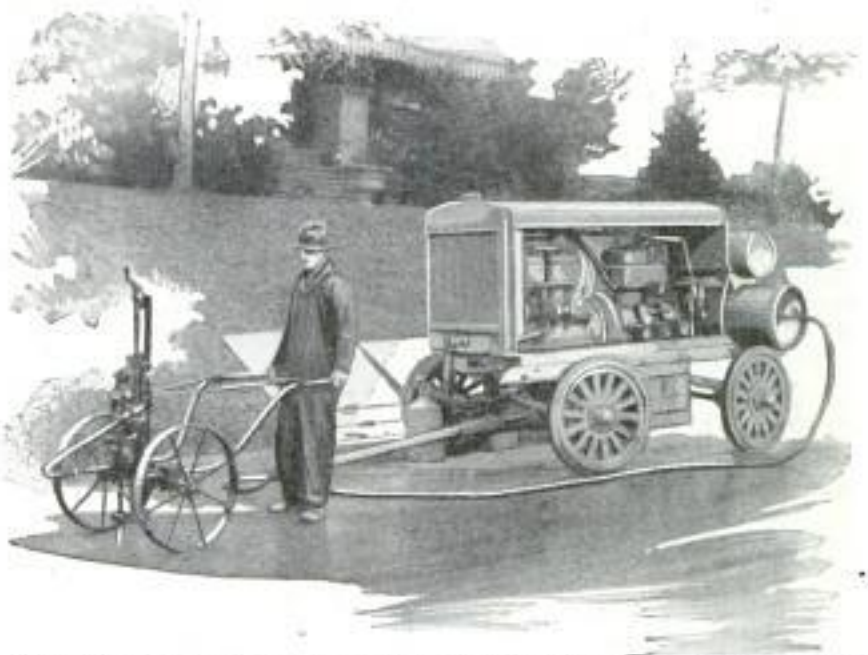

Smoothing Off Bumps on Concrete Pavement with Portable Drill Driven by Air Which Is Compressed by Motor at Right

WORLD'S SUPPLY OF RADIUM LESS THAN HALF A POUND

Since Mme. Curie discovered the precious element in 1898, less than half a pound of radium has been produced, according to Dr. Charles H. Viol of Pittsburgh. Small as this quantity is, it represents an almost unbelievable amount of work and has an estimated value of $15,000,000. Enormous quantities of ore have been handled to obtain it. For instance, more than 500 tons of carnotite, found in Colorado, are required to yield only one gram of radium, and the refining of the ore calls for as many tons of chemicals, 1,000 tons of coal and 10,000 tons of distilled water. The radium bromide extracted fills only half a thimble. Radon, the radium emanation used in treating disease, being a gas, has a much greater value weight for weight, but from $25 to $50 worth of it will treat conditions that would require from $2,000 to $4,000 worth of pure radium.

Copyrighted material

2855 Cmr. S. A. Winters, District National Bank Bldg Washington D C

FIGHTING FIRES *from* TRAINS

Southern Pacific R R.

WITH three-fifths of our original timber already gone, and the demand four times greater than new growth can supply, vigorous steps are being taken throughout the country to preserve the remaining forests and to plant new ones. Last year, 16,000 federal, state and private rangers were in the field, stamping out campfires and stubs left by careless persons and smokers of the horde of 11,000,000 visitors who roamed our 146 national forests.

A railroad in California is doing its bit toward saving the forests with a battery of four fire-fighting trains. They are stationed at strategic points along a snow-shed section, especially to protect the structures and the woods near by from sparks from the engines. Each train consists of a standard ten-wheel locomotive and two tank cars, which hold between 20,000 and 30,000 gallons of water. Ladders, axes and 1,000 feet of hose are included in the equipment of each unit. The pumps are operated by steam from the locomotive and each has a capacity of 300 gallons per minute.

At the summit of the line, nearly 8,000 feet above sea level, observers are stationed in a fireproof concrete tower throughout the dry months to watch for suspicious curls of smoke by day and the telltale glow of a fire at night. A glance at a specially designed surveying instrument and a map showing every tunnel, mile post and signal box along the section, tells the location and character of the blaze. If it is merely a travelers' campfire, started too close to the sheds, men are dispatched to move the campers to a safer distance and put out the fire. But if the timber is burning, an electric alarm from the tower to the nearest fire-engine house, sends a train and its crew speeding to the scene. Steam is always up and the men ready for duty twenty-four hours of the day, just as in any city department. If the fire proves serious, other trains are sent to assist the first unit. Alarm boxes are installed in the sheds so that track walkers and laborers can call out the trains in emergencies when the observers fail to see the blaze. The cost of maintaining the unique fire department, it is declared, is money well spent without counting the saving represented in preventing the spread of blazes that might burn far into Uncle Sam's and private forests.

Copyrighted material

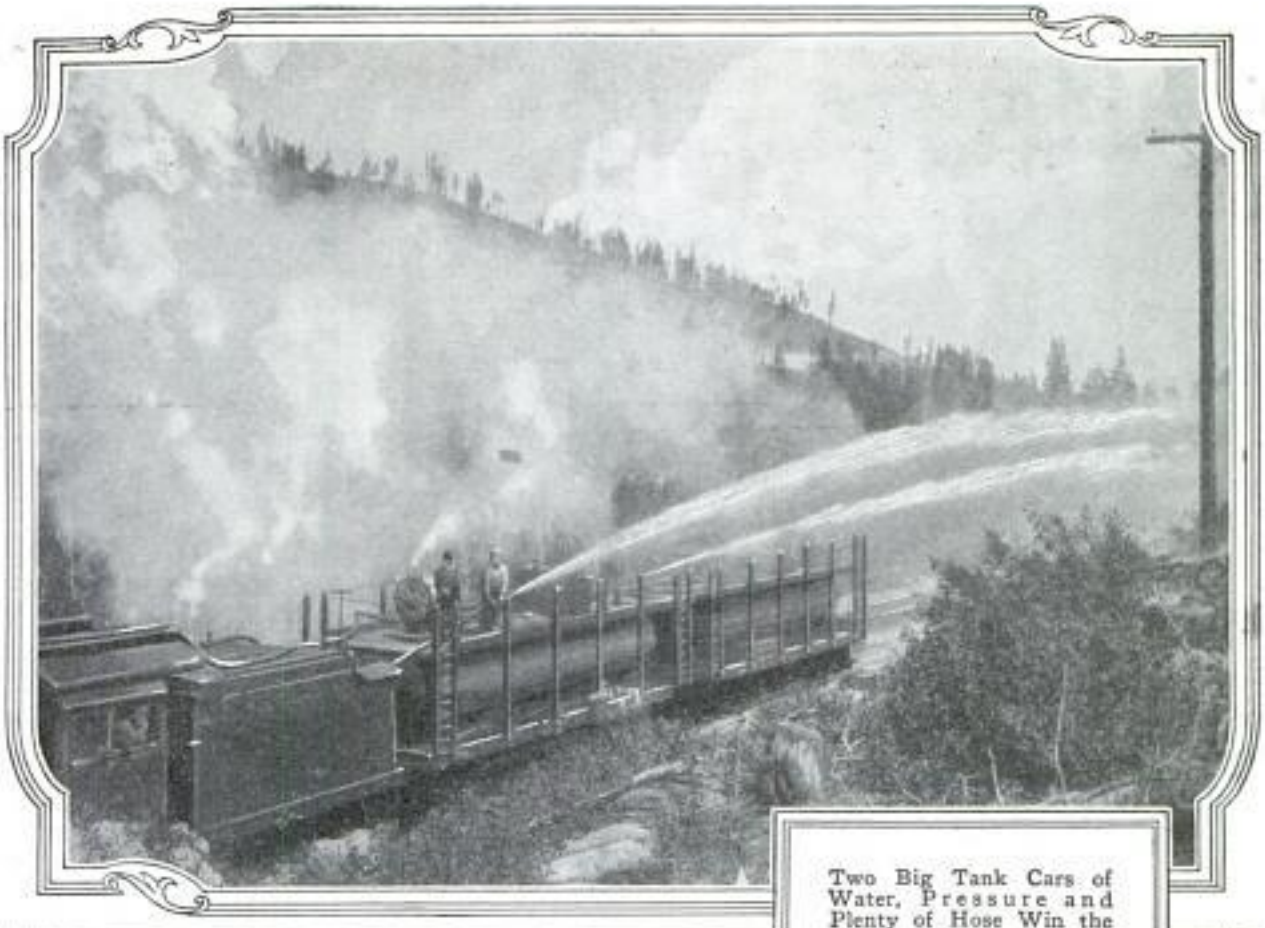

Two Big Tank Cars of Water, Pressure and Plenty of Hose Win the Battle

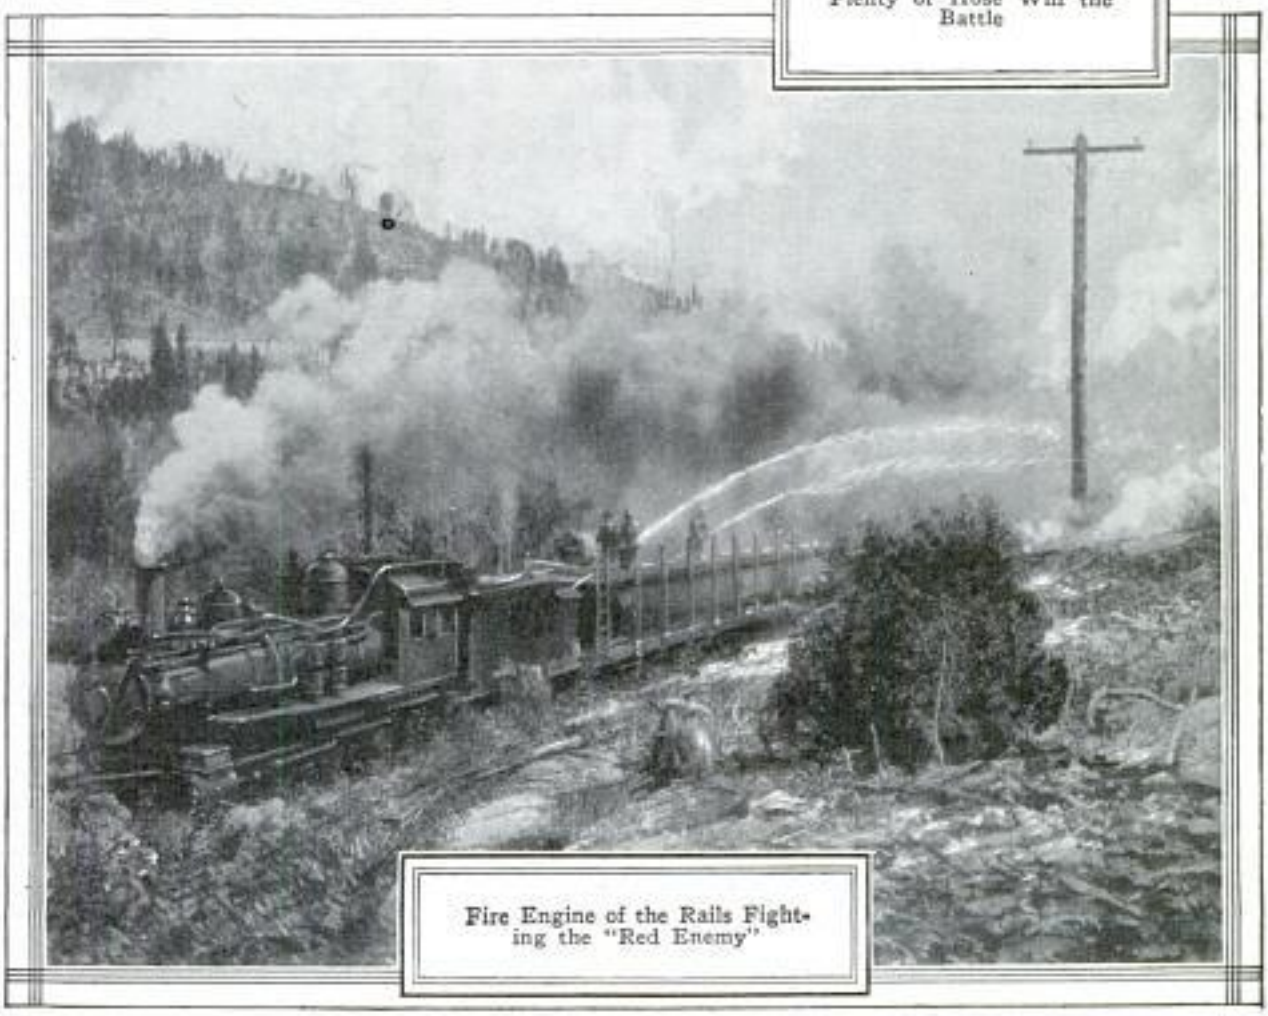

Fire Engine of the Rails Fighting the "Red Enemy"

Courtesy Southern Pacific Ry. Co.

Copyrighted material

BALL-AND-SOCKET STEPLADDER LESSENS DANGER OF FALLS

A safety ladder for light work and household use has been designed to resist

Safety Ball-and-Socket Ladder That Can Not Be Overbalanced by an Uneven Footing

tipping or overbalancing. No matter how any one of its four legs may be elevated, the other three are said to remain firmly in position, insuring a substantial footing without risk to the worker. Often hastily placed ladders are thrown off balance by unnoticed objects under the supports, but the tipless device is claimed to stay upright even in such a case. Constructed like two ladders, hinged at the top with a ball-and-socket joint, the structure can be readily handled and folded when not in use.

¶Wooden airplane frames will soak up more than 100 pounds of water on a damp day, it has been found.

FEW BIRDS ARE HIGH FLYERS AIRPLANE PILOTS FIND

No air pilot has reported birds higher than 12,000 feet and most of them do not rise above 1,000 feet, according to a German scientist. The bluethroat, believed to be able to fly at the rate of 200 miles an hour, in reality cannot do better than twenty-five, airmen interested in the study of the feathered flyers declare. The chief difficulty in observing birds from airplanes is that the machines cannot go slowly enough to follow them.

ELECTROPLATED OVERCOATS

A method of plating fabrics with a leakproof layer of rubber, similar to the electroplating process to coat metals with other metals, was reported to the American Chemical society by Dr. S. E. Sheppard. Cloth may be made up into completed garments and the apparel electrically treated with a covering that repels all moisture and avoids danger of parting at the seams, the scientist claimed. Owing to the additional strength given the fabrics by the rubber plating, rips will be prevented, and the surface of the cloth preserved against wear. The process is said to eliminate many of the operations now required in the manufacture of rubberized waterproof cloth and simplify its assembly into garments.

COVER ON PIPE FOR MOTORISTS IS ADJUSTABLE TO WIND

A pipe with an adjustable cover for the use of motorists is designed to overcome the annoyances of having tobacco, ashes and sparks blown about by the wind while driving. The top can be rotated so that the closed section is presented to the wind, leaving the open side undisturbed. Even when traveling at high speed, the autoist may enjoy his pipe without having it fanned to uncomfortable heat by the rush of air, and the tobacco is allowed to burn slowly avoiding injury to the wood. The pipe also may be smoked in heavy rains as the lid is ample protection against entrance of water. A hinge is provided so the lid can be thrown back to fill the bowl.

© C. A. Oldroyd

Copyrighted material

Playing the Popular War Game of Battle Ball in Which Skill of Hand and Eye Is Required to Aim and "Fire" the Toy Guns

EUROPEAN WAR GAME LATEST FAD IN AMERICA

Many of the delights of open-air sports and contests are provided by the indoor pastime of "battle ball," played with toy cannon mounted on a table resembling that used for billiards. Two opposing teams can take part in the game, which consists in shooting small metal balls at a larger sphere of leather in an attempt to force it into goal pits at the ends of the course. Skill is required to aim and "fire" the imitation guns, and the pastime, which is popular in many parts of Europe, is claimed to be excellent training for both the hand and the eye. The apparatus is light in weight and can be readily set up or dismounted in a few minutes. The game has been introduced to American "fans," and its popularity is said to be due to the large number of players able to take part in the sport.

AUTO GLARE SCREEN FASTENS ON THE WINDSHIELD

A glare screen which can be fastened to any part of an automobile windshield in a moment, has no bolts or screws and requires no tools to put it in place. The guard is disk-shaped and filters out the blinding rays from headlights, sunshine and reflected light from the roadway, reducing the risk of accident and making the dimming of signals to oncoming drivers at night, unnecessary. It can be instantaneously removed to any part of the glass panel desired, and either left on permanently or taken off and laid aside, when driving conditions do not require it. Protected by the glare shield, a motorist can be aided by the beams from opposing headlights as they fall in front of his car on dark roads, without experiencing their flash in his eyes. In winter, when frost gathers on the windshield, the use of the glare screen, it is claimed, also permits an unobstructed view through the glass.

ONE-MAN FIRE BRIGADE SERVES OUTLYING DISTRICTS

Almost as completely equipped as a big motor fire engine, but not much larger than a toy, a small automobile outfit that can be operated by one man, serves neighborhoods on the outskirts of London as well as villages and smaller communities. The fuel tank is placed under the instrument board to make room for the pump, three standpipes, chemical apparatus and hose behind. The car having right-hand drive, as usual in England, the pumping controls are in front at the left.

Small Size of Motor Fire Engine Is Illustrated by Human Figure; Its Compactness Aids in Heavy Traffic and Helps Speed

Copyrighted material

HANDLE FOR SMALL CAMERAS SERVES AS TRIPOD

Holding small cameras steady without the use of a tripod has been simplified by a

Detachable Handle Permits Holding the Camera with One Hand at Level of Eye

wooden handle which is screwed to the underside of the instrument and is held with the left hand while the shutter is pressed with the right. Further stability is gained if the top of the camera is lightly pressed against the operator's forehead. When not in use, the handle may be detached and carried in the pocket or case.

TEN MILLION RADIOS PREDICTED FOR U. S. IN FIVE YEARS

Predicting an expenditure of $450,000,000 for radio by the "fans" of the nation during 1925, experts have estimated that by 1930 there will be 10,000,000 receiving sets in operation in the country. Five years ago, approximately $2,000,000 was spent for apparatus, and last year the amount had increased almost 175 times that figure. In 1923, there were 145,350 sets in use on the farms, and one year later the number had more than doubled. At the beginning of the industry, all apparatus were assembled by the owners, but with the steady development of parts and hookups, the volume of ready-built instruments purchased increased until about forty per cent are now sold ready to tune in. To supply the more than 4,000,000 homes now equipped with receiving apparatus, programs are regularly broadcast from 563 stations established throughout the country.

AUTOMATIC CRANKER ON MOTOR TO PREVENT STALLING

Attachable to any automobile that has a Bendix drive, an automatic cranker starts the engine the moment it stalls and also saves the ignition. It is actuated by magnetic force, throwing the starter into action as soon as the engine stops. In emergencies, such as being stalled on a railroad track, the cranker starts the motor immediately. It may be placed on the instrument board, behind the dash, under the hood with its two small buttons showing on the instrument board, or under the floor. In the latter case, the starter pedal is removed. All that is necessary to start the engine is to turn on the ignition, and as it must be turned off to stop the car, this scarcely will be forgotten.

TOY TOWN IS HOME OF LIVE PETS IN CHILDREN'S MUSEUM

In a museum for children maintained in England, a toy village serves as the home for a community of live pets kept as the main feature of the exhibit. Miniature churches and dwellings are set to resemble a town and each building is allotted to a family of small animals. The display is under the care of one man who

Section of Animal Village in Children's Museum Where Live Pets Are Housed in Toy Dwellings

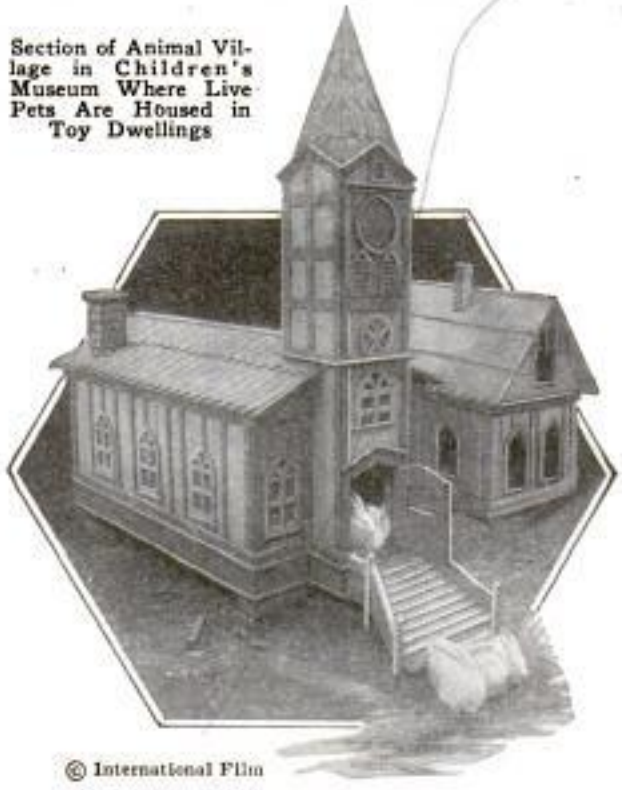

© International Film

designs and constructs the miniature houses. No outward detail is overlooked to make the buildings true copies of those they are patterned after.

Copyrighted material

2742

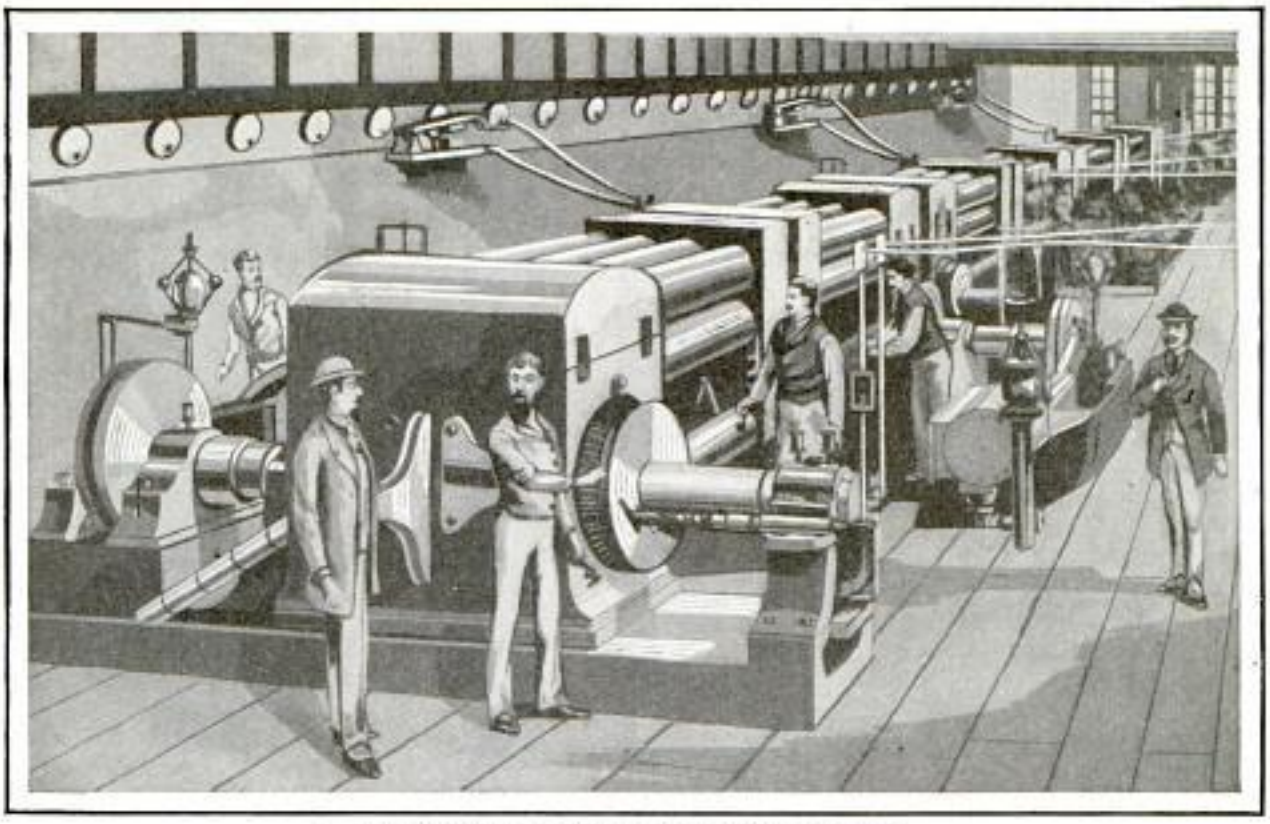

The First Central-Power Station Opened in 1882

The Centenary of Electricity

By EARLE W. GAGE

JUST one hundred years ago, Michael Faraday, a young research worker at the Royal Institution in London, made his first effort to produce electricity from a magnet. From this experiment the age of electricity may be said to date. Faraday barely missed success in that first attempt, but continued his efforts until, seven years later, he announced that electricity could be generated by moving a wire in the neighborhood of a magnet.

With the materials he had used in 1824, he made at last a machine embodying the principle of the dynamo. Others followed this up, but it was not until 1871 that the dynamo was made commercially when Gramme applied the ring armature. Then came the epoch-making discovery that the Gramme machine was reversible. In other words, that it would not only produce electricity, but that electricity would produce power. Before Faraday, a trifling incident revealed to an Italian scientist the fact that when two metals and the leg of a frog came into contact, the muscles of the leg contracted. The galvanic battery resulted. Years later another observer discovered that if a wire carrying a current of electricity was wound around a piece of soft iron, the latter became a magnet.

Michael Faraday

Out of these simple discoveries has grown the harnessing of a giant force that illuminates the cities of the world, drives great battleships, melts steel and hauls mile-long freight trains over mountain passes, accomplishing each day in

Copyrighted material

2742

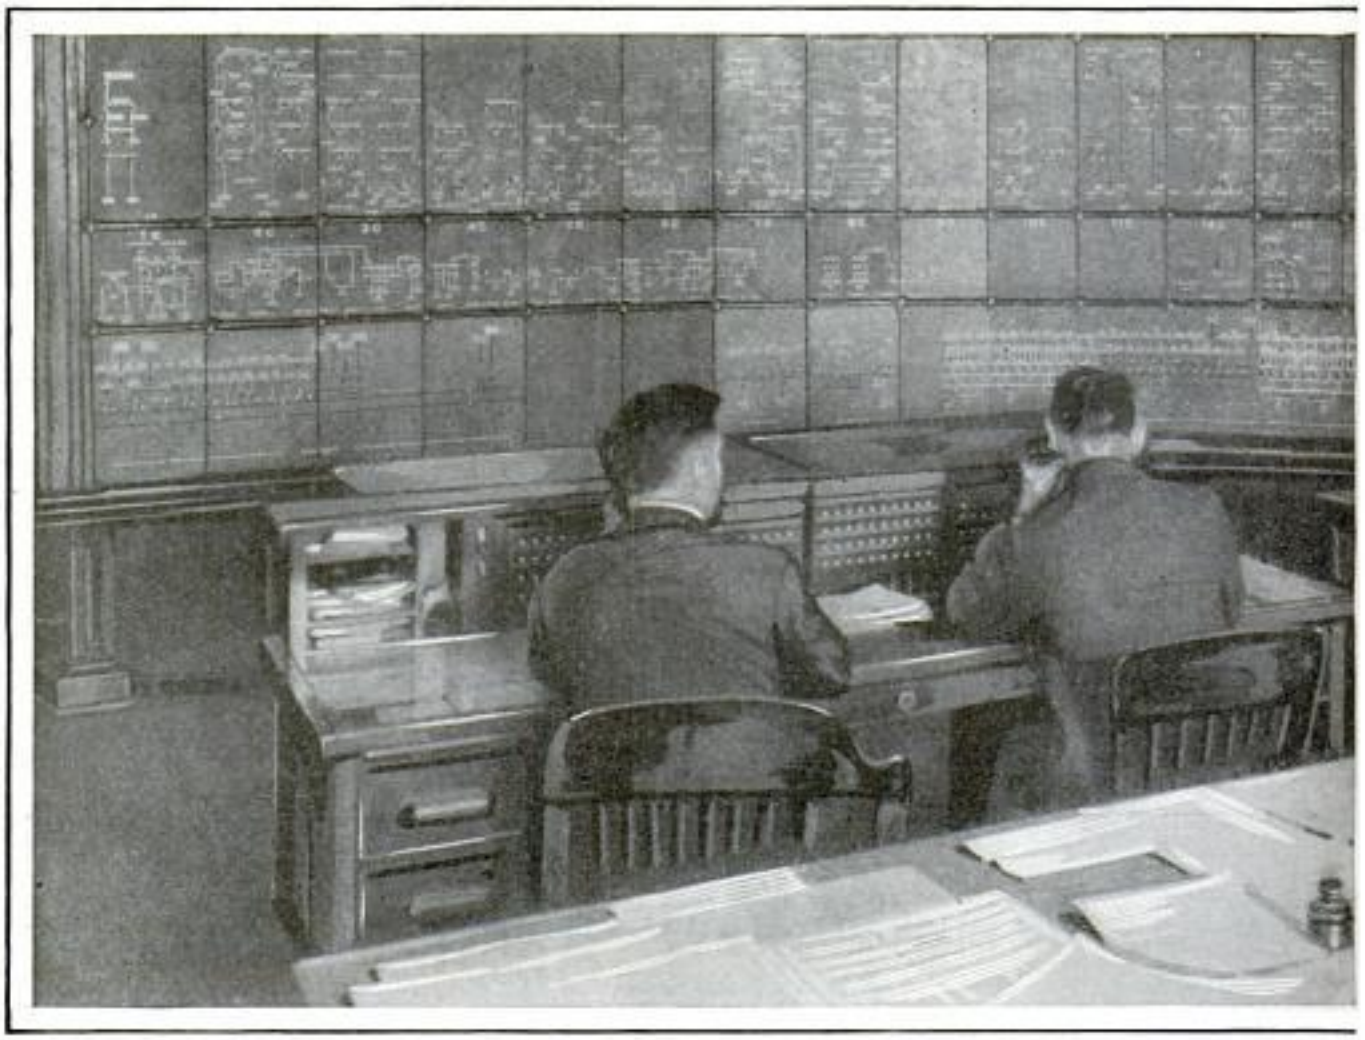

In the Load Dispatcher's Office Where More than One Million Electric Horsepower Is Directed from Generating Plants to 300 Distributing Centers Supplied by High-Voltage Lines

America alone the work of nearly 200,000,000 men.

Only a hundred years ago, Faraday took a magnet and a bit of wire and played with them together, but today the capital invested in electricity in the United States is over $13,000,000,000, and there is only one industry with a larger amount—the railroads. More than this, electricity has changed man's manner of thought. If he would talk to the other side of the world—or sing to it—he talks at once, waiting for no trade winds. He thinks in terms of the instant. In transportation, illumination and communication electricity has done its chief work, and above all in communication.

This came about because in Faraday's laboratory notebook there is an entry, jotted down as something to do: "Convert magnetism into electricity." He wrote that a year or two before the first experiment in 1824, which was finally crowned with success in 1825. The possibilities of electricity were one of many problems that had interested Faraday from his early days. Even as a lad, apprenticed to a bookbinder, he had spent his pennies on experiments in physics, and in 1812, when he was twenty, he made an electrical machine, following the formulas of the time. What he learned in those early days, and what he came to suspect, went into his final achievements.

Of all the discoveries which have influenced and made possible modern civilization, the two greatest probably are the application of heat and artificial lighting. Think how many of our American institutions owe their existence to the control of light! Imagine the world without any form of light save that provided by nature, and you can see how quickly the veneer of civilization would slip away and we would become little more than savages skulking about in fear and darkness.

But the progress of lighting, like the progress of civilization itself, was a slow and difficult process. After centuries of inadequate artificial illumination, electric lighting, scientifically developed, at last made it possible for us to continue our work and our recreation long after the sun has set; in thousands of night schools

Copyrighted material

2742

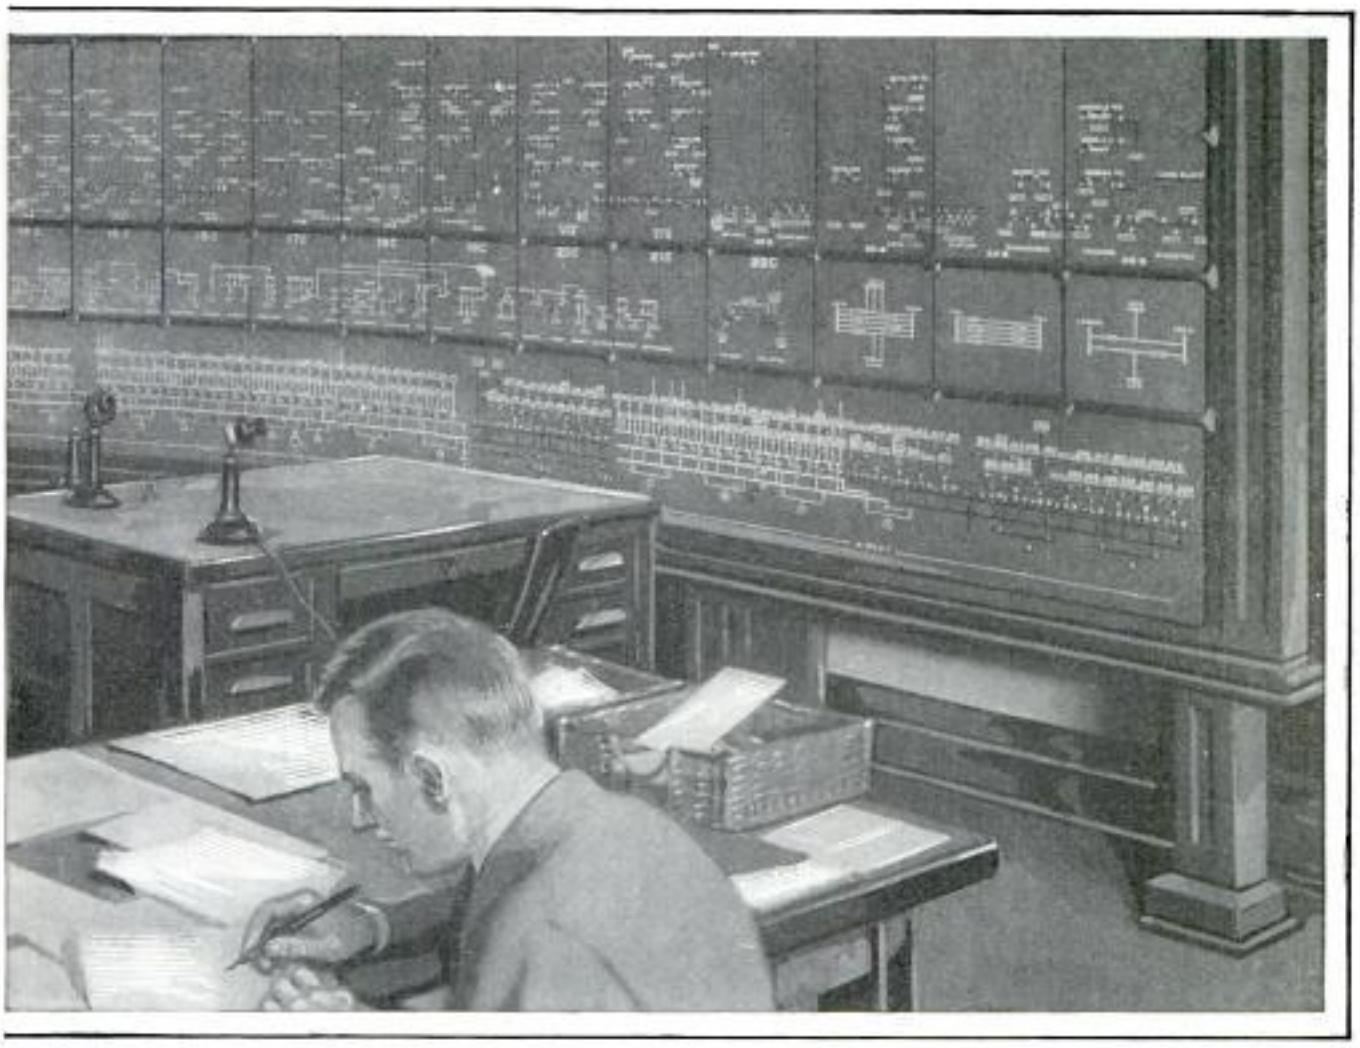

Huge Wall Diagram Gives Chief Dispatcher and Assistants Picture of Transmission Lines over Entire System, Showing Which Are Closed, in Service or Being Repaired

artificial light provides the way for education which would otherwise be denied to many; by control of light the officers of our nation's laws are enabled to see that they are observed and to protect the law-abiding majority from the crimes of the lawless minority.

And yet the beginning of the general commercial use of electric light may be said to have been made by Jablochkoff, who, in 1876, lighted several boulevards in Paris with his "electric candle," an arc light consisting of two carbon rods held together side by side but insulated from each other. In this country there were several pioneer arc-light systems, one of the most notable workers in this field being Charles F. Brush.

The extensive use of the arc created a demand for an electric light of smaller size. Several American inventors attacked the problem, among them being Thomas A. Edison, who had a well-equipped laboratory at Menlo Park, N. J., where he had several assistants and many workmen, about a hundred all told. He had made many inventions, among which were the quadruplex telegraph, the carbon telephone transmitter and the phonograph.

Owing to the seeming impracticability of carbon for a light-giving element, he decided to try platinum. Finding that it had to be operated close to its melting temperature, he designed a thermostatic regulator to automatically short-circuit the burner when it became too hot. He found that continued heating and cooling drove gases out of the platinum so that it became extremely hard and could be operated at much higher temperature.

Realizing that the series system of distribution was impractical for household lighting, where each lamp must be independent of every other, he tackled the problem of making a completely new system. He finally evolved a practical multiple system. Reasoning that a high-resistance lamp would be necessary on such a system, he made a platinum lamp having a long coil of fine wire mounted on pipe clay, but this was too expensive to be commercial.

After several trials, he finally mounted

Copyrighted material

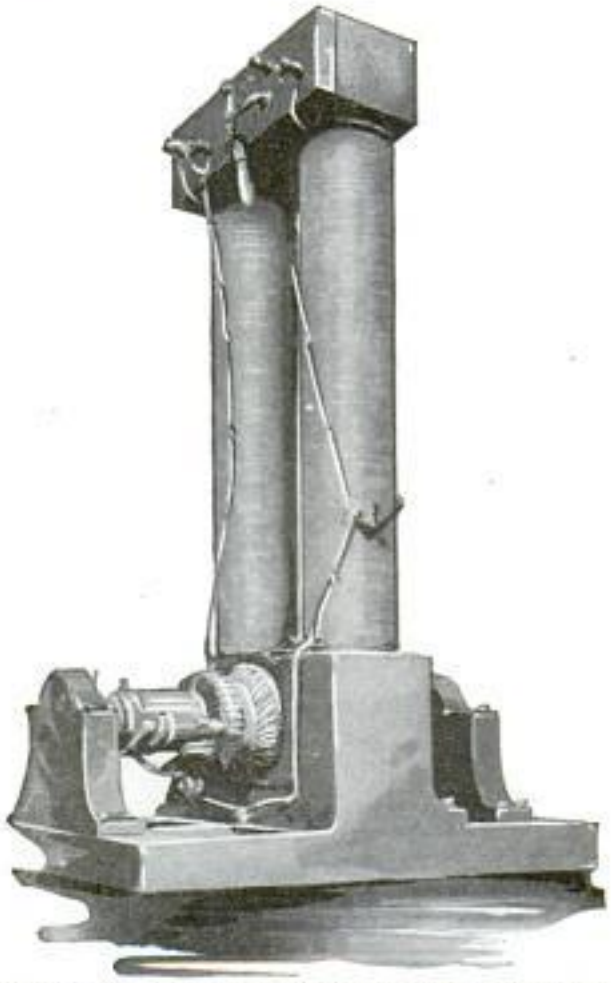

Parent of Later Electrical Marvels, the Quaint Old Edison Dynamo of 1880

a carbonized piece of ordinary sewing thread in his all-glass globe, and turned the current gradually on. This was Oct. 21, 1879, and the lamp burned continuously for about forty-five hours before it failed. He applied for a patent, and on Jan. 25, 1880, a basic incandescent-lamp patent was granted him. All incandescent lamps made today embody the basic features of his patent.

During the next three months, everything conceivable was carbonized to make a better filament, carbonized paper giving results that justified him in announcing his invention. This appeared in a full-page article in the New York Herald of Dec. 21, 1879. A demonstration of his complete lighting system was made at Menlo Park during the Christmas holidays by lighting the grounds and near-by country roads with lamps on poles. The crowds that came out were so great that the Pennsylvania railroad had to run special trains.

Although it was only forty-three years ago that the pioneer electric-lighting company opened for business, today there are fifty-four and more accepted uses for electricity in the home, and upward of 12,000,000 homes wired for electrical service. The electric washing machines in use number more than 3,250,000; the electric cleaners more than 4,000,000. Electric ironers, refrigerators, ranges, cookers, grills, toasters, waffle irons, percolators, sewing machines, flashlights, heating pads, curling irons, vibrators, immersion heaters, utility motors, fans, portable heaters, hair driers, toilet accessories, portable lamps, and so on—these would boost the total to an almost incredible figure.

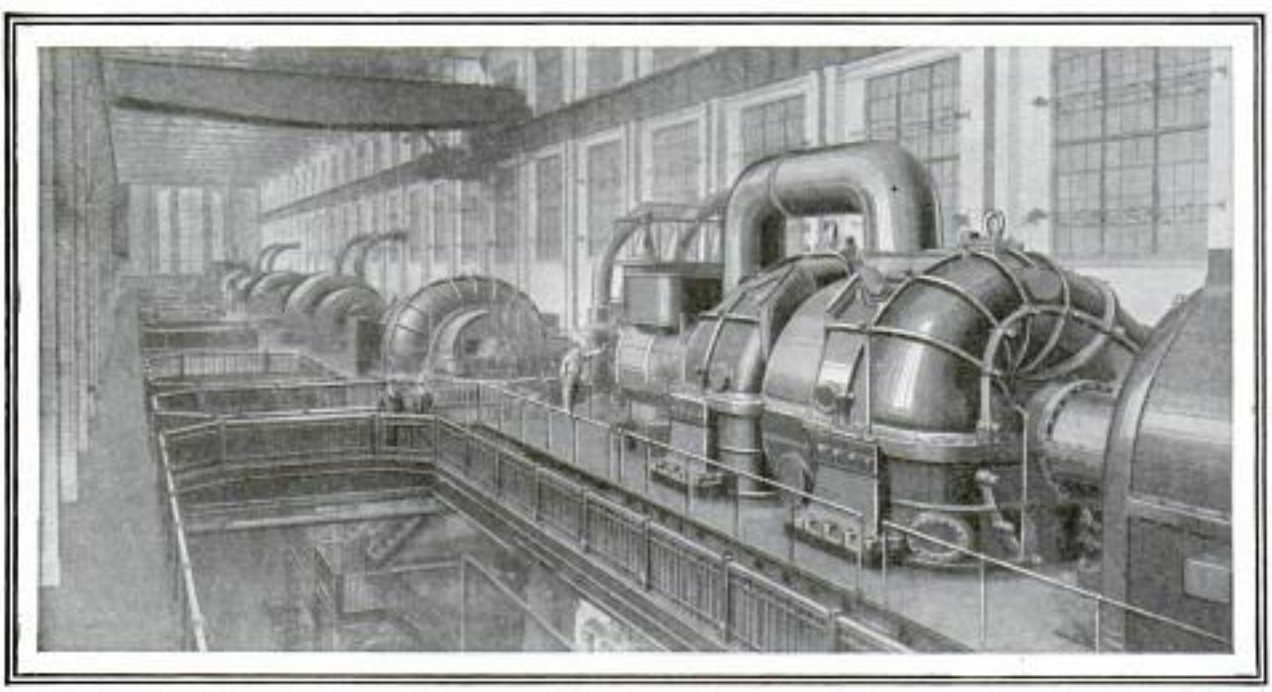

Courtesy Commonwealth Edison Co.

Where a Quarter of a Million Horsepower Is Generated, inside a Large Central Station with a 50,000-Horsepower Horizontal Turbo-Generator in Foreground and Five Smaller Ones Behind

Copyrighted material

HOW MANY LEAVES HAS A TREE?

In connection with his study of forests, an eastern engineer has counted the leaves on different kinds of trees at various ages and sizes. He discovered that in the late summer, trees that shed according to season have from 3,000 to 30,000 leaves when they are fifty years old, forty feet high and about six inches in diameter. Beech, elm, basswood, ash and hickory had the largest number of leaves; poplar, soft maple and chestnut the smallest. Similar varieties from five to eleven years old bore from less than a hundred to nearly 1,000 leaves a piece. A white pine tree, 18 years old and two inches in diameter, had approximately 500 fronds, while one forty-seven years old and eight inches through bore nearly 6,000. A peculiar feature of this unusual census was that many of the numbers were ascertained by actual count.

Radio Sending Set for Airplanes Is Easily Carried and Will Get Power from Wind-Driven Generator

WASHERLESS AND DRIP-PROOF FAUCET IS EASILY CLEANED

To prevent waste of water, a drip-proof faucet which requires no washers has been devised by an English inventor. The tap, which, it is said, can be easily removed and cleaned in a few minutes, is sanitary and constructed to avoid splashing. Since washers are unnecessary, there is hardly any need for repairs as the faucet is designed to last for a considerable time. It emits a smooth-running stream, and attachments and shields for reducing the splash are, therefore, not required. When installed on a metered line, the tap will accomplish a great saving by preventing leakage, which represents large losses in measured water systems.

TWO-FOOT RADIO TRANSMITTER WEIGHS BUT FIFTY POUNDS

Light weight and compactness are essential features of an experimental radio transmitter the United States navy has devised for use in aircraft. Tests thus far, at the naval base at Quantico, Va., have been made only on the ground, but messages from the set have been picked up on the island of Guam, a mid-Pacific naval station 10,000 miles west and 15,000 miles east of Quantico. It is practically certain that the message traveled eastward, because it was sent when there was more darkness east than west, and it is a known fact that radio waves travel better at night than in sunlight. The set, without the power plant, weighs approximately fifty pounds and is less than two feet in any dimension. It uses two fifty-watt tubes on a high-frequency wave length varying from sixty to ninety meters. This is considered another desirable feature, as it does not conflict with the many commercial radiophone stations using 350 to 600 meters. Only a small power input is required, and officials believe that a thirty-pound wind-driven generator attached to the plane could supply it.

Copyrighted material

AUTOMATIC FIRE EXTINGUISHER TO SAVE FLYERS

Courtesy Societe Anonyme Minimax

Testing the Automatic Extinguisher at an Actual Airplane Fire; Inset Shows Hand Controls and How Jets of Liquid Are Sprayed into Motor from Nozzles

Sitting aloft in his cockpit, closely scanning the airways and watchful of his ship, a pilot is in grave danger when fire suddenly attacks his motor. He cannot stop to put it out. He quickly must find a safe landing place. In a few seconds, the fire may be beyond control. After ten years' research, a French inventor whose imagination was quickened by this peril, has devised an automatic extinguisher with which, it is claimed, fires can be put out in less than a minute whether the plane is in the air or on the ground.

It consists of four tubular boilers similar to those of a railroad locomotive and, like the steam engine, uses the force of expansion to do its work. These tubes are connected with a piston made of expanding rings comparable to those of a barometer. Perhaps the plane may be sailing smoothly along and fire suddenly bursts out of the motor without the pilot's knowledge. Almost immediately, the added heat causes a liquid inside the boiler tubes to turn to vapor. The pressure thrusts the piston forward and lifts a lever which releases a spring and opens a stop cock. Compressed air or carbonic-acid gas rushes from the outlet into a pump of another reservoir containing a powerful fire-extinguishing liquid. In a second or two, jets of this substance are shot into the heart of the flames from the little pump. While this has been happening, the magnetos of the motor have been shut off automatically, the gas supply stopped and shutters of the radiators closed to keep air from the flames. Under actual tests, the apparatus is said to have extinguished a number of motor fires in from three to ten seconds. It can be operated by hand if necessary simply by pressing a switch. A few pints of the extinguishing liquid are sufficient for a violent blaze, and the reservoir that supplies the jets may be recharged simply by turning another switch.

ESPERANTO TAUGHT BY RADIO

Advocates of Esperanto as a universal language are broadcasting lessons in the subject from a Paris wireless station. The lectures are designed to give the listeners a fair working knowledge of the language and to prove its practical value. Radio, it is believed, is an effective object lesson in the limitations resulting from a wide diversity of tongues, for many programs cannot be enjoyed in Europe although sets receive them distinctly, because the entertainers cannot be understood. A prize is offered to the student who shows the greatest progress in studying Esperanto by the radio method.

Copyrighted material

MAKING CAR RIDE SMOOTHER BY RAIL-JOINT TESTS

To reproduce the pounding effect of a heavy electric car or locomotive, the bureau of standards uses a 400-pound hammer in making tests on welded rail joints. It is raised six inches above the track and then allowed to fall. Another instrument used is a telemeter, an electric device that is clamped to the joint and automatically registers stresses that are placed upon them. This little gauge has shown that a stress of 2,000 pounds per square inch on a clear rail, may be increased to 5,000 pounds if a pebble is put on the track and cars run over it. The tests are being made to improve existing types of welded rail joints, an improvement looking toward smoother riding.

ONE-CYLINDER MOTOR PLOW REPLACES FOUR HORSES

The horse, rapidly being displaced in cities and on farms by automobiles and tractors, has a powerful rival in a one-cylinder motor plow, said to do the work of four of the animal toilers at half the cost. The implement, introduced on an English farm, is readily handled by one man, and owing to its compact construction, can be driven into corners and close to fences generally inaccessible to horse-drawn tools, resulting in increased planting space and a saving of hand work to turn the soil. It requires little attention for upkeep and consumes a small supply of fuel, besides relieving farm hands of the constant care required by draft animals.

Power Plow Driven by One-Cylinder Engine with Which One Man Can Accomplish Work Equal to That of Four Horses

CHARACTER IS READ BY MIRROR THAT ANALYZES THE FACE

Human nature is reduced to the basis of calipers and slide rule by an invention

Analyzing Character of a Subject with a Mirror That "Reads" the Features of the Face

now being demonstrated. The device consists of a mirror made up of a large number of sections, forming a circular looking glass about three inches in diameter, and set in the center of a disk some twelve inches across. Each of the segments of the mirror extends on a curve, all moving together or apart, like the "leaves" of a camera shutter. The segments are labeled with the various facial characteristics and the person having his character read sits sideways to the mirror, so that the profile is clearly shown. Then the operator, with this mirrored face in front of him, moves the outer segments to conform to the description of the face as he sees it. The lines from the segments in the disk lead to letters and figures in the rim. These letters and figures refer to a key book, in which each characteristic is listed.

¶The coast of southern Greenland is receding from Scotland sixty to 125 feet a year, and Iceland is drawing away from Norway sixty to sixty-three feet annually.

Copyrighted material

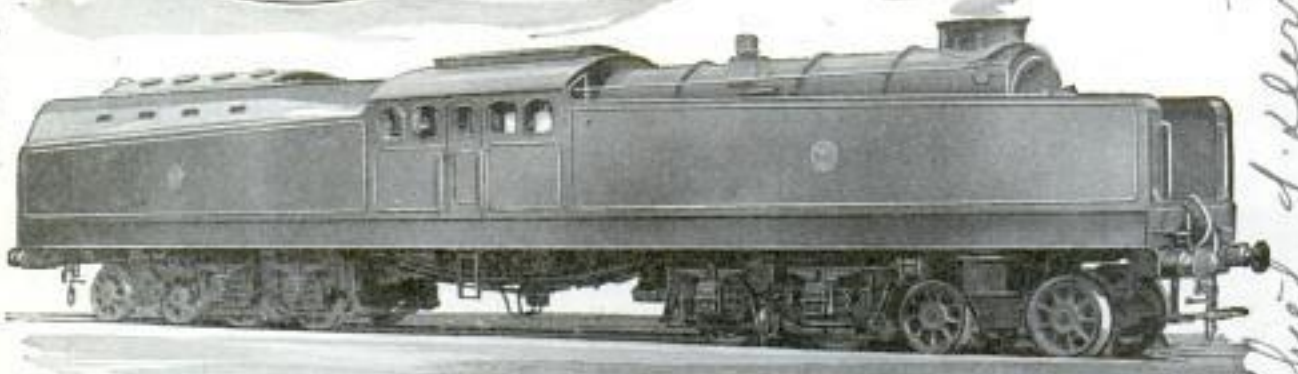

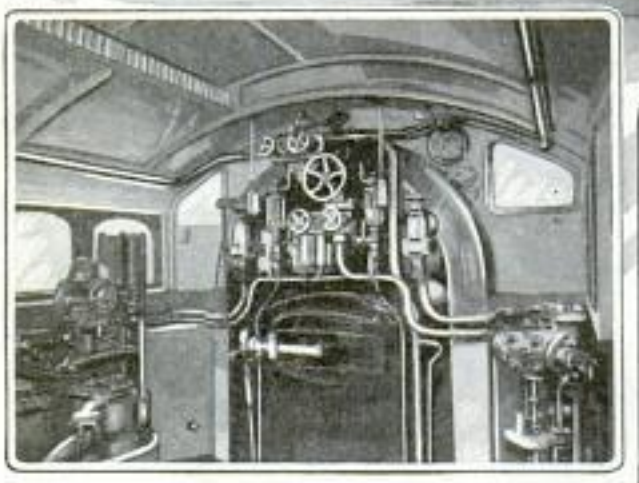

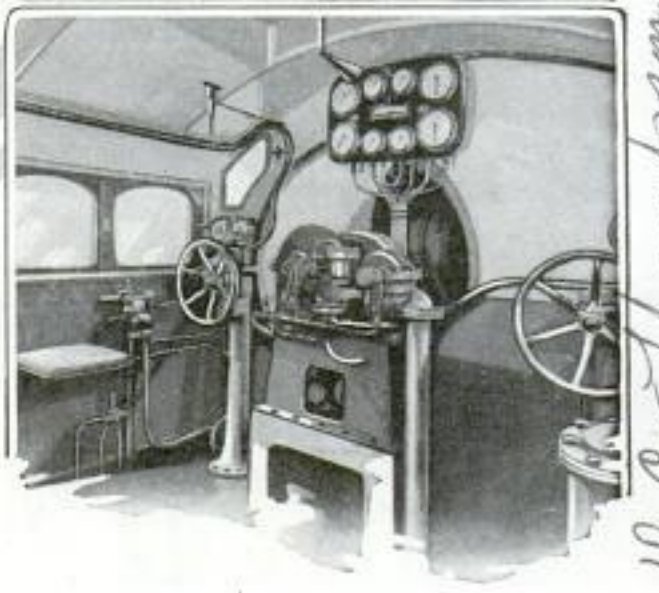

Front, Side and Interior Views of Fireman's and Engineer's Ends of Cab in Oil-Burning Steam-Turbine Locomotive That Carries Smokestack in Rear and Has No Tender

GEARED STEAM TURBINE ENGINE TESTED IN ENGLAND

Radical departures from usual types of locomotives were made in a geared turbine engine for an English railroad. It has no tender, the smokestack is in the rear, and fireman and engineer use opposite ends of the big cab compartment, which is in the center. The boiler occupies the trailing end and the condensing plant the front. Each unit has eight wheels, and four in each are geared drivers. The engine burns oil.

FARMS LEASED FOR A DOLLAR AS GAME PRESERVES

Game preserves in Ohio now occupy more than 100,000 acres, mostly in farms which have been rented by the state at $1 a year each for a ten-year period. They are no expense to the taxpayers, for maintenance costs are taken from fines and fees, and farmers have been glad to lease their lands in this way since it affords protection against trespassing and does not interfere with use of the ground. There are eighty-seven such refuges, ranging from 500 to 2,800 acres each and located in seventy-four of the eighty-eight counties in the state. All are placarded and patrolled by sixty-five regular game protectors, supplemented by assistants at special seasons.

Copyrighted material

AUTOS REFINED BY RESEARCH TO STOP WEAR AND NOISE

Behind the scenes of the automobile industry, armies of men are toiling in secluded laboratories constantly seeking added refinements. Various ways have been found for making an electrical current tell the story of a motor's movements. For instance, there is a device that records the instant of changes in pressure in the cylinders of engines during the compression, firing, exhaust and intake strokes of the pistons. Another measures and records the twisting vibrations of the crankshaft and camshaft. The problem of eliminating noise is receiving increased attention. Instruments that convert sound waves into electrical impulses or that make photographic records of the waves are employed in search for the sources of noise. Engineers found that by cutting a particular gear wheel in two, putting a strip of oil paper between the halves and fitting the two parts together again, they had deadened the ringing sound of the metal; baffle plates arranged over a rapidly revolving shaft stopped the whistle made by the air. Growls, rumbles and hum of gears, fan, bearings and other parts are measured by an instrument that creates a counternoise to drown the noise in the car. Changes in the future, it is believed, will be in the way of refinements rather than anything revolutionary.

LETTER FILE FOR HOME KEEPS PAPERS NEAT AND SAFE

A letter file for use in the home provides a place for valuable papers and correspondence which can be readily reached for reference. Besides preventing loss and injury to the matter, the cabinet is claimed to encourage the practice of keeping bills, certificates, and the like, in one receptacle, and to save delay often caused by searching through shelves and drawers for needed papers. The holder has space for 1,500 full-size business letters and when open, it is said, a postal card can be picked from the bottom even if the container is filled to the limit. Hinged sections may be provided with locks, and the surfaces are finished in attractive shades.

MACHINE VENDS LEAD PENCILS STAMPED WITH BUYER'S NAME

Lead pencils at five cents each and stamped with your name are distributed automatically by a vending machine that is operated easily and can be placed wherever such outfits are needed. The prospective buyer, by pressing a system of levers, sets up the type inside that prints his name. This is done in such a way that errors may be corrected before the impression is made, and the entire name is stamped at once. The machine holds 300 pencils, does not easily get out of order and occupies but little space.

Pencil Vender, Showing Coin Slot and Levers That Set Type to Stamp Name

WORKERS REFRESHED BY SALT RESIST HEAT OF MINES

Miners experiencing fatigue while toiling in warm and damp areas of underground mines, may avoid tiredness by drinking a weak solution of salt water at regular intervals during the working day. The remedy, tested by workers in England, is claimed to replace much of the natural mineral of the body lost by constant exercise in humid air. Another valuable use for salt is said to be its employment as a carrier for a minute quantity of iodine introduced in foodstuffs. Because of the absence of this chemical in products grown in regions remote from the sea, goiter is often found to be prevalent in such communities. The iodized salt permits the drug to be administered as a table article to supply the required element without altering the color or the taste of the salt. Taken for a considerable period, it is believed to be generally beneficial.

Copyrighted material

Time and Money-Saving Tools

Chain-Swing Seat with Strap for Back Makes Window Washing Safe and Comfortable

Opening Bottles Is Just One of the Many Uses of This Metal Kitchen Spoon, Eleven Inches Long, for Stirring, Beating and Straining

To Keep the Handle from Getting Sticky, a Hook on the Underside Holds the Jam Spoon on the Edge of the Glass

Wherever There's a Light Socket, Meals Can Be Prepared in Electric Fireless Cooker That Is Carried as a Pail, Weighs But Fifteen Pounds, Occupies Small Space and Uses Little Current

Pushcart Market Basket Lightens Shopper's Homeward Journey; If the Load Is Small, Wheels and Handles Can Be Pushed Out of the Way and Basket Carried by Handle on Top

Anyone wishing further information on devices described in the editorial pages can

Copyrighted material

for Woman's Workshop in Home

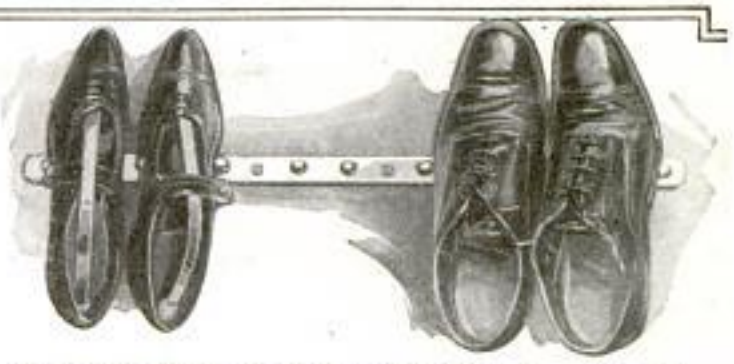

Rack Holds Shoes by Their Soles to Protect the Door, and Buttons Are Spaced for Different Sizes; at Right Is a Night Light That Fits the Ordinary Socket and Is Serviceable in the Nursery or Sick Room

Just Pull a Clamp and Tin Springs Off the Cake, Saving the Bother of Using a Knife

Right, Demonstrating Hair Curler with Spring Lock to Hold It; Below, Revolving Aluminum Laundry Tub with Three Trays and Rotating Center Faucet for Filling Any Compartment with Hot or Cold Water

Lightweight Portable Water Softener for Home Use; Fits Any Faucet and Contains No Chemicals

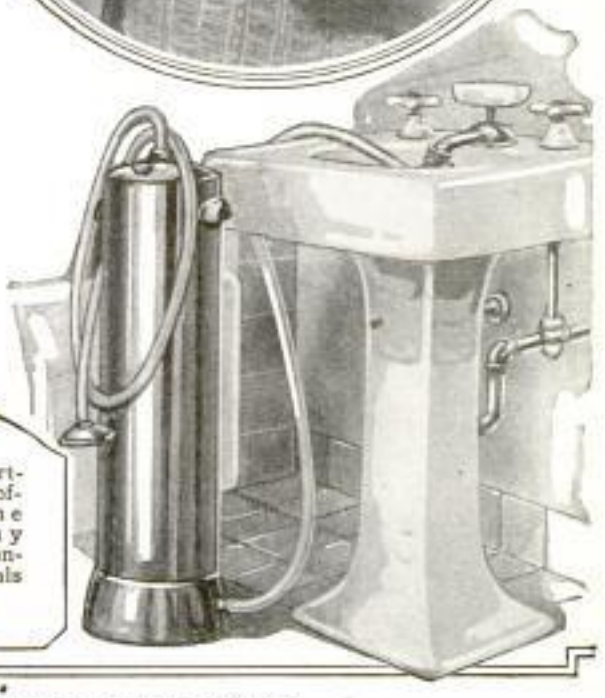

obtain it by addressing Bureau of Information, Popular Mechanics Magazine, Chicago.

Copyrighted material

Kindergarten Tots of a School in England Snugly Reclining in Hammocks, Slung on the Legs of Inverted Classroom Benches, during the Daily Period of Rest from Play and Study

HOLDER FOR AUTO-LIGHT BULBS FOLDS OUT OF WAY

Spare bulbs for automobile lamps are conveniently carried in a holder which protects them from injury and keeps them within easy reach of the driver. The container is made for attachment to the bottom of the instrument board, and when not required, may be folded out of the way under the panel. Four sockets are provided, each labeled so that the motorist cannot mistake the wrong bulb when replacing a burned-out light. The bracket, which can be easily fastened in position, occupies but little space, and when swung back, leaves no sharp edges to catch clothing or interfere with the operation of the other fixtures.

HAMMOCK BEDS FOR STUDENTS SWUNG FROM BENCHES

Benches are turned upside down and their legs used to support tiny hammocks in which kindergarten pupils of a school in England recline during their daily rest hour. The inverted seats are laid in rows, and the swinging beds swung onto the ends of the wooden legs with a few loops of the ropes. As the benches are low, the children can easily climb into the hammocks without assistance. Small blankets ornamented with nursery pictures are furnished as coverings for the youngsters during the rest period.

INVISIBLE LIGHT FOR SIGNALS TO FOOL FOES IN AIR

Infra-red rays, the long light waves that ordinarily produce no color sensation on the eye, can be adapted to army use in sending secret signals and for detection of chemical frauds and forgeries, according to Dr. Robert W. Wood, of Johns Hop-

kins university. Only observers equipped with field glasses that had special screens, similar to that used in the transmitting lamp, would be able to see the flashes from the rays, he declares, and a code could be sent in this manner for a distance of five to eight miles in full sunlight. It has also been found that the rays cause a marked change in the appearance of objects. Airplanes, for instance, might be painted with enemy insignia and used for scouting duty with greater safety, as friendly troops, equipped with the special binoculars, would recognize the true signs. Near infra-red rays have actually been employed to effect changes in stage settings. A drop, for instance, that under ordinary light may be made to represent a summer scene, will change to one resembling winter under illumination of the near infra-red rays.

MODELS OF RIVER STEAMERS BUILT BY CLERK AS HOBBY

Building models of Hudson river steamers is the hobby of the clerk of a New York town. He and a companion have made five, using pine boards as their principal material. Their only tools were a saw, plane, chisel, drill and knife. The model of the "Berkshire" shown in the illustration, is seventy-six inches long, twelve inches wide, weighs about fifty pounds and is electrically lighted from the house circuit. Joining the many small pieces, boring the portholes and fitting the tiny plates around them proved a difficult task for amateurs, but the model was pronounced correct in every detail by experienced river men. The builders toiled fourteen hours a day for fifty days to finish it.

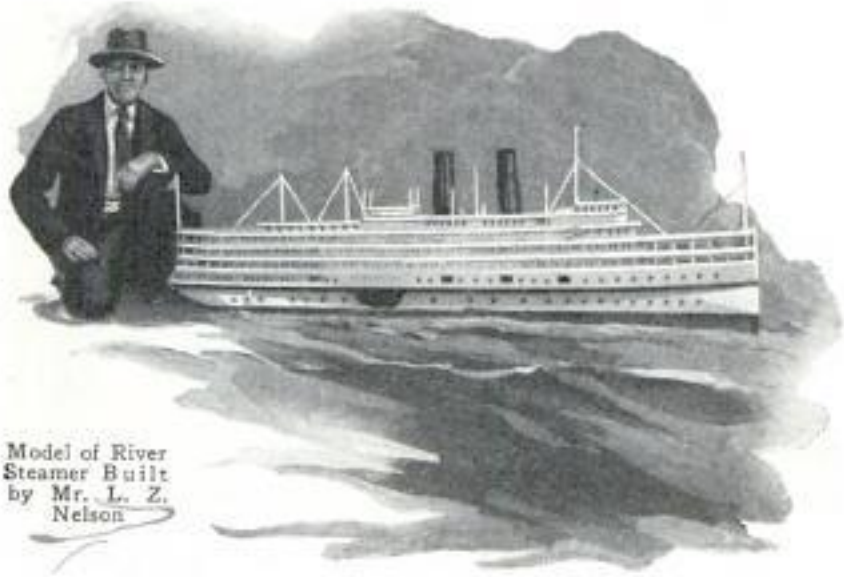

Model of River Steamer Built by Mr. L. Z. Nelson

FLASHLIGHT HAS LAMP ON SIDE AND CLIP FOR BELT

For those who work in dark places and need both hands free, a flashlight has been

Handy Flashlight with Lamp on the Side and Clip for Attaching to Workman's Belt

designed, with the lamp on the side so it can be set on end and the rays cast in any horizontal direction. A strong steel-spring clip is also provided on the case, opposite the lens, for fastening to the belt or clothing, permitting the beam to be directed on any point by twisting the body slightly. The device sheds a brilliant light and is claimed to furnish ample illumination for tasks of linemen and for night repair work on roads, bridges and railroad equipment. As part of a motorist's accessories, it can be used in the garage and on the road as a trouble lamp and to aid in making repairs which require the use of both hands.

¶The Popular Mechanics' Bureau of Information offers its free service to all readers of our magazine. Names and addresses of manufacturers and dealers in articles described, and any other details in our possession, will be promptly furnished by addressing the Bureau.

Copyrighted material

PRINTING PRESS FOR THE HOME CAN BE RUN WITH ONE HAND

Menu cards, programs and small signs can be printed easily and quickly at home

Home Printing Press in Operation; Pressing the Type Block Down with Lever

on a little press an English firm is distributing. A single movement with one hand runs the roller over the type for inking it and makes the impression. A lever arrangement simplifies the operation and regulates the pressure. Its few parts are of such simple construction that they are not likely to get broken, and when not needed, the outfit may be stored away in a small space.

OLD AUTO OIL IS RECLAIMED

For the economical operation of fleets of motor trucks and automobiles, an electric apparatus has been invented which reclaims the crankcase oil and makes the lubricant suitable for repeated use. The device automatically removes the products of combustion and wear, cleans out the road dust and fuel mixtures and restores the oil to its original lubricating properties. The reclaimer, which operates unattended, can be altered to increase or lower its capacity as desired. It is claimed that the reclaimed oil may possess even greater stability than when originally put in the crankcase, due to the breaking down of less firm elements during its first use, which are removed by the process. One supply of the reclaimed oil is said to have been used for three years, performing for operations totaling 16,000 miles. Even after several redeeming features, it is stated, the lubricant may be used with results equaling new oil, and, as a consequence, may only require slight additions of fresh fluid to replace that part of it which is actually consumed.

HALF MILLION BAGS OF CEMENT USED IN LINING TUNNEL

The task of lining the Connaught railroad tunnel in Canada, the largest tube of its kind in North America, required a half million bags of cement and untold tons of sand and stone to mix the concrete with which the work was done. The material was prepared on the scene in large cars, and compressed air was used to blow it into place behind the wooden forms. Four years were required to complete the undertaking, which is said to be among the largest of its class ever attempted. Due to the double-track system in the tunnel, traffic could continue without interruption during the progress of the work. No loss of life occurred in the accomplishment of the feat.

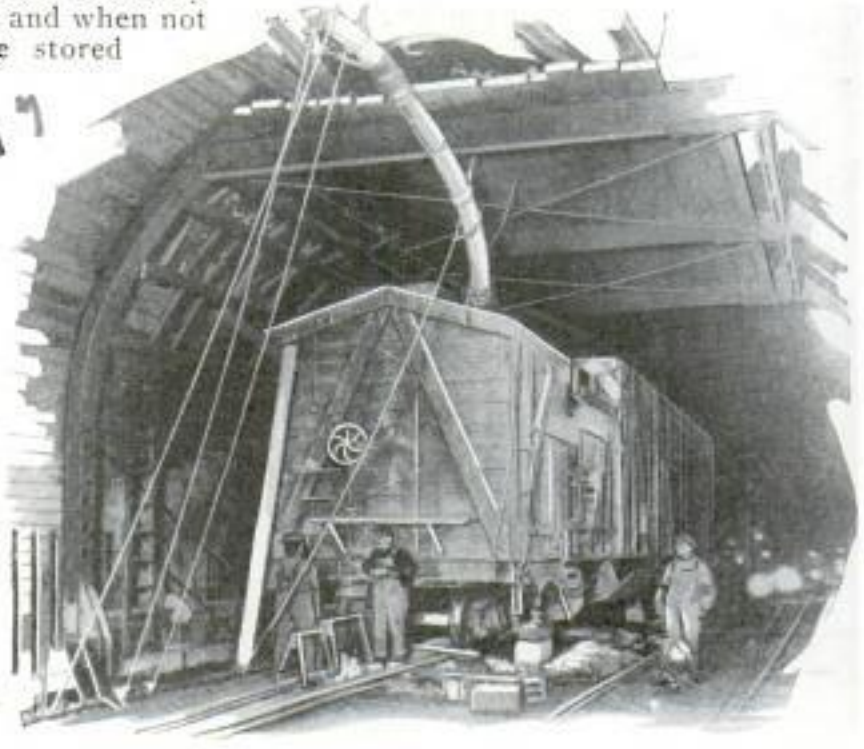

Lining the Connaught Railroad Tunnel with Concrete Mixed on the Scene in Cars and Forced behind the Forms with Compressed Air

Copyrighted material

Strange Ways of Earning a Living

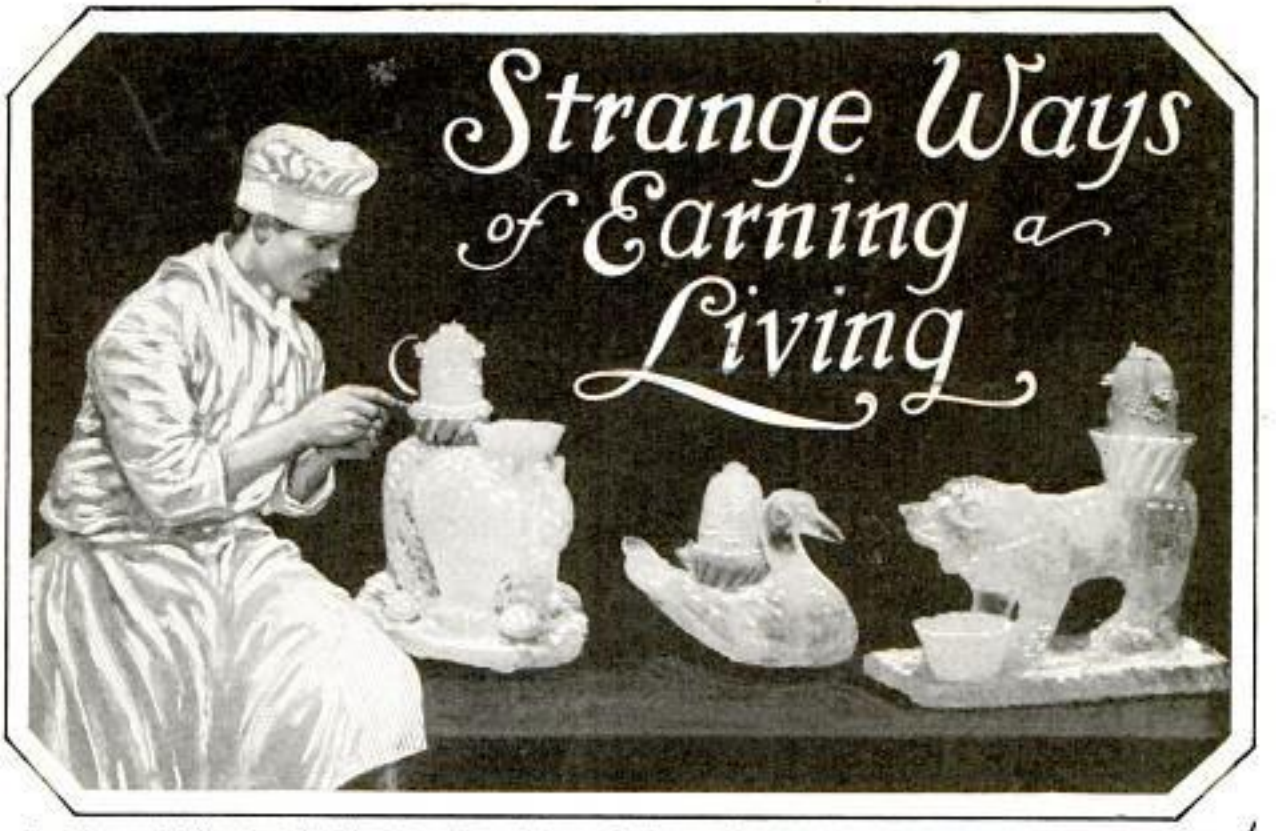

Ice-Carver Adding the Finishing Touches to Frozen Sculpture He Models as Containers for Cooling Dainties Which the Frosty Cups Make More Attractive to the Tastes of Diners

By UTHAI VINCENT WILCOX

THERE are tasters of tea and samplers of coffee and there is now a smeller of hams. No, he doesn't work in a grocery store but in one of the world's largest packing houses. This man stabs every cured ham with a pick which he then passes under his nose and is able to state positively and quickly whether that particular ham has soured around the bone or not in the process of curing. That's his job. Quantity production of hams has made this vocation necessary.

But speaking of strange professions, or jobs, or whatever you want to call them, one of the strangest is that of a man who pursues the not unlucrative calling of language teacher to parrots. This teacher of birds is versatile, knowing something of many tongues. He will teach any parrot almost any language according to the place and market where it is to be sold. This parrot tutor has a strange house given over to the "school." The rooms are divided with soundproof partitions, which make little compartments where a "pupil" is hung in his cage. Here the teacher takes the uneducated bird and by a system that he himself has worked out teaches the parrot to say short sentences. Lessons are heard morning, noon and night. Over and over, each day, the teacher will pronounce the same word or even short sentences, depending upon what it is that he is attempting to teach. He says that his pupils, unless they are exceptionally dull or very brilliant, take just about a fortnight to graduate.

Men, however, have no monopoly of strange occupations, as in Brooklyn, the Society for the Prevention of Cruelty to Animals has installed women on its wagons. Experience has proved that dog owners are loathe to relinquish their pets unless satisfied that the animals will receive the same gentle care that they have at home. On her first day on the job, one of the women brought in sixty-eight dogs and cats, something of a record.

Nature isn't perfect by any means, so there is a chance for man to make a living perfecting the voices of canary birds. It is being done. There is a big German in one of the eastern cities who will take a poor and indifferent canary bird and teach it to trill and warble and do a few roulades. "How do you teach a canary to sing?" he was asked. The old German smiled rather slyly—there were a few secrets to the business, but he didn't seem to be in the mood to reveal them. When he was pressed more insistently to tell how the birds were taught, he admitted: "A cricket is sometimes an excellent teacher, though his instruction periods are

Copyrighted material

2383

Prof. J. L. Washburn
University of Minnesota
St Paul, Minn

Teaching Young Canaries to Sing, with a Tiny Piano for Accompaniment

Clothed like a Native, This Scientist Hunts Insects in the South Sea Islands

Lady Custodian of Hundreds of Rats and Mice Used in a Research Laboratory for Medical Studies

Mender of Oriental Curios Repairing a Damaged Oddity That Was Made More than 800 Years Ago: Right, Expert Preparing to Make X-Ray Pictures of a Swiss Cheese to Learn Quality

Right Photo © U. & U.

Dr. R. J. Matheson
Bureau of Animal Industry, Dept. of Agri.

Copyrighted material

Animal Ambulance in Charge of Women Specializing in Care of Ailing Pets

To "Paint" Pictures in Colored Rope Is This Artist's Novel Craft

Girls Who Make a Business of Testing the Notes of Toy Horns to Determine Their Volume

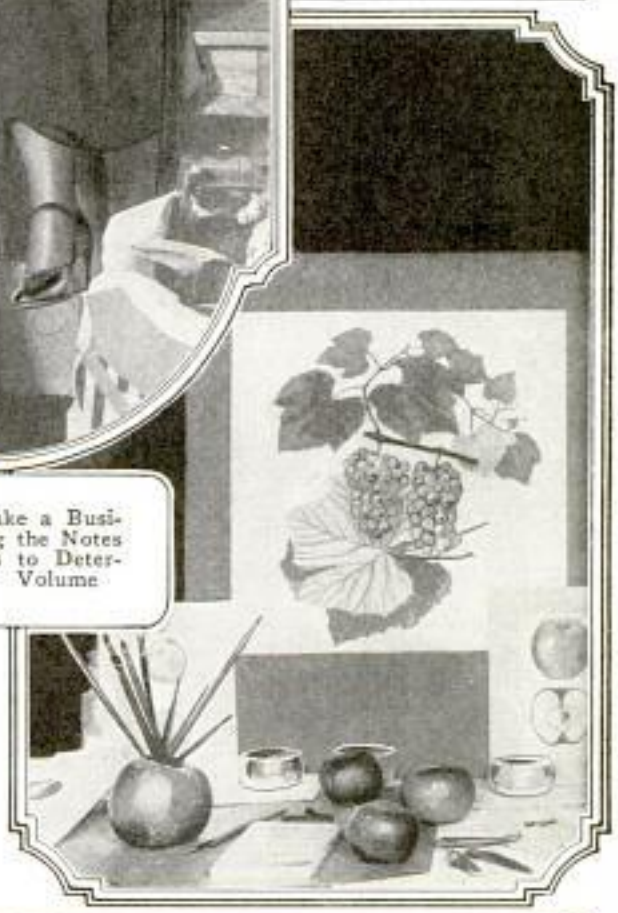

Native Alaskan Employing the Eskimo Method of Cutting Beads from Ivory with a Crude Brace and Drill; Right, Wax Imitations of Fruit Copied by an Artist for the Agricultural Bureau

Right Photo © U. & U.

Copyrighted material

a bit uncertain. On the whole, though, other birds with good songs are the best teachers."

Most of the strange occupations in the world today are the result of civilization and its strange demands. Because men, but probably women mostly, like pearls, there has come to be the pearl expert. There is one man in New York who qualifies for the head of this one-man business. His equipment is a square of black velvet and a microscope, and the ability to keep his specialized knowledge secret. This man is retained on a yearly basis by the great gem houses of the city who employ him not only to appraise the pearls that they buy but the pearls owned by estates that are occasionally broken up. One reason why this one-man business is a success is that he can be trusted not to tell if he finds that the gems of some dominating society matron turn out to be fish scales and not pearls.

But for gainful occupations you should make the acquaintance of "Cinder Ella," the old crone who haunts Wall street, or did until a short time ago. She may be there as usual, with business as usual, next summer for all the curb brokers may know. Her name tells her occupation—she picks the cinders out of the eyes of the curb brokers and receives therefor whatever they may give her.

If you go down in the Chinese quarter of your city to get your toothpicks you may be able to get the kind that you can chew up but not down. If you succeed in finding this variety, it is because of the business of a man of Seattle who makes regular trips to Bering Straits where among the Indians he buys walrus mustaches. These long, black, stiff hairs are taken back to Seattle and sold to the Chinese who consider them very choice and the politest of toothpicks.

But there are still more: Have you heard of the school for the teaching of men and women to pose as wax models in exclusive department stores? There is one. Have you heard of the man in Maine who makes a very comfortable living catching hedgehogs? He ships them to many parts of the world.

These are but a few of the occupations that have arisen from modern hectic life. The census bureau says that there are some ten thousand occupations that men and women follow in the world, but we wonder if they know about them all—these for instance.

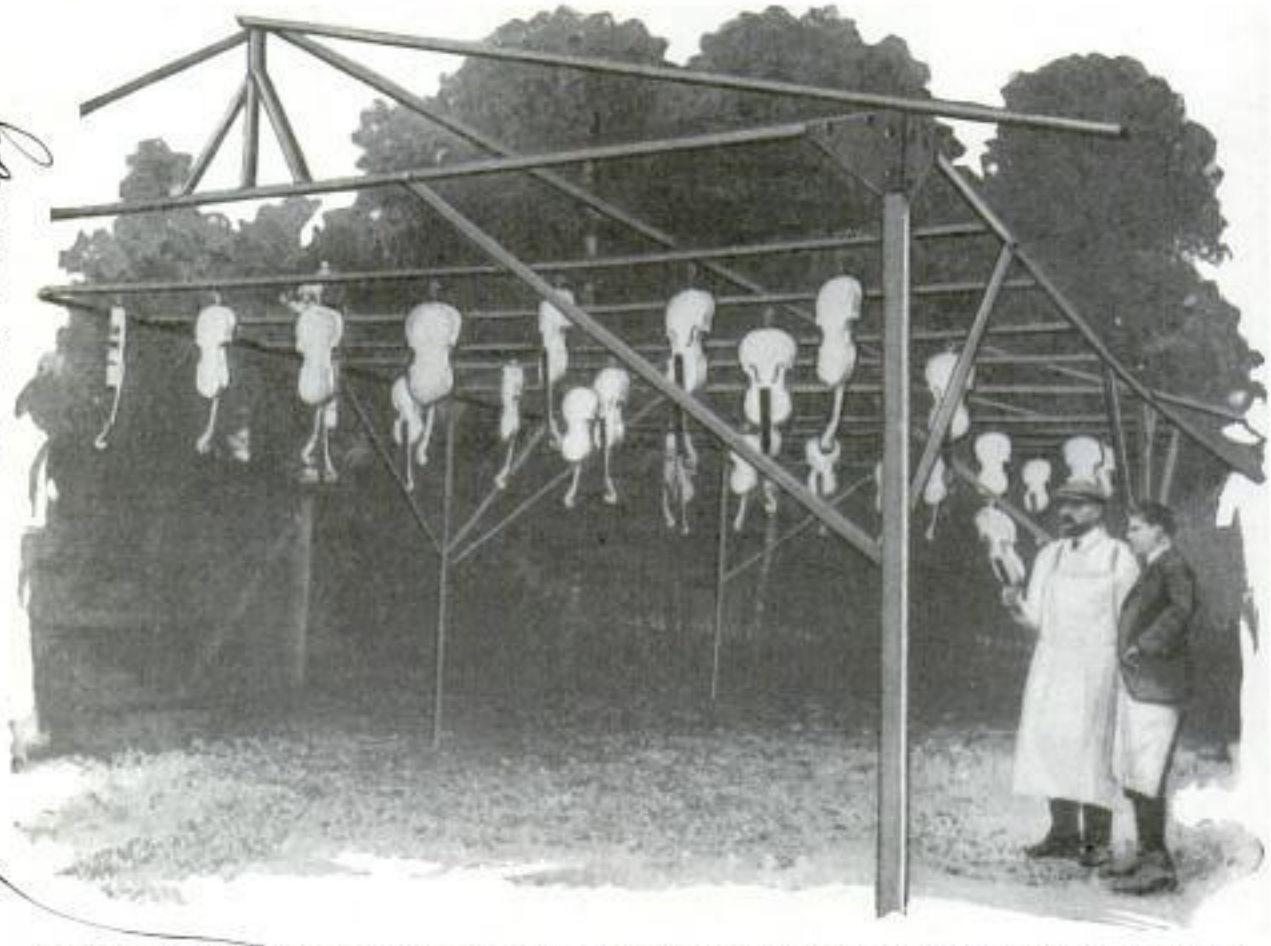

Instructor and Student at a School That Teaches the Art of Violin Making Examining Instruments Hung Out to Dry after Being Coated with a Covering of Shellac

Copyrighted material

COLOR TESTER FOR FABRICS DETERMINES DURABILITY

Uncertainty as to whether colored fabrics will fade or not is greatly reduced by a testing apparatus that adapts to another practical use one of the latest triumphs of science, clear fused quartz. The outfit consists of a special electric lamp within a six-inch fused tube of the quartz material. Samples of cloth are exposed for a few hours to the brilliant white light and the ultraviolet rays cast by the lamp. They are then examined and compared with untested cloth. From the changes in color, it is possible to tell just what effect sunshine under ordinary conditions will have on the goods, as the relative action of the lamp and of normal light has been accurately determined. The chief value of the quartz is that it does not obstruct the rays which affect the pigment. Ordinary glass does. Furthermore, with the lamp a reliable test can be made in a comparatively short time, for exposure to the ultraviolet rays will affect the fabric much quicker than direct sunlight.

RUBBER PADS IN HAMMER HEAD ABSORB SHOCK OF BLOWS

Hammers that are lined with rubber in the opening that fits onto the handle so that the shock of the blows is absorbed, have been placed on the market. Gripping the handle firmly in the socket, the rubber cushion takes up the jar of the blows before it can reach the hand of the person using the tool. Extreme tests are said to have proved the efficiency of the idea.

HOUSE OF CORN IS BUILT FROM SCHOOL CHILDREN'S CROP

Representing thirty-seven kinds of corn in ten different colors, a house in Sidney, Nebr., entirely built from the ears and stalks of the grain raised by school children, formed a popular feature of a harvest exposition. The structure, which was set up in the center of a prominent street, is substantially put together and ornamented in novel designs. The outer walls are composed of ears of the corn, stalks form the thatched roof and the floor is made of kernels. High-school students erected the house, which serves to give the visitor an idea of the kinds and quality of corn the neighboring soils are capable of producing.

House Built from Corn That Was Raised by School Children; Ears, Stalks and Kernels of Various Colors Were Used to Ornament the Structure

LIGHT PLANT RUNS ITSELF

A hydroelectric light and power station which can start, stop and regulate its output of current in accordance with the demand put upon it, all without the aid of attendants, is in service on the Deerfield river in Vermont. The plant can also readjust its operation so that service interrupted by short circuits is resumed automatically. When in working order only an occasional inspection is required,

Copyrighted material

STEEL "LUNG" TO CURE ILLS BY COMPRESSED AIR

Sufferers from bronchial troubles at a London hospital are placed in a large steel cylinder and subjected to compressed-air

Patients Awaiting Compressed-Air Treatment in Steel "Lung"; Operator at Outside Controls

treatment. The receptacle is ten feet high, more than six feet in diameter, contains seats and a table and will hold several persons at a time. Air pressure is regulated by outside controls and is shown on a gauge. It is raised to the maximum at the end of the first half hour, maintained at this point for an hour longer and then gradually reduced.

NAMES FOR FREIGHT TRAINS TO REPLACE NUMBERS

Names that typify speed and certainty and that express the character of the service, are to be given fast freight trains on an eastern line in place of prosaic numbers. "Ironmaster" is the title selected for a train that carries steel from Pittsburgh to New York, the "Eagle," the "Meteor," the "Blue Streak" and the "Blue Goose" will describe other freights that operate on fast schedules. "Gas Wagon" has been chosen to designate an automobile train and "Spark Plug" is to haul perishable goods.

SUN'S HEAT SOUGHT AS HERALD OF CYCLONES AND DROUGHT

Four years of observations to determine a method of long-range weather forecasting, based on daily measurements of the sun's heat, will be made by a joint expedition from the National Geographic society and the Smithsonian institution. According to scientists, solar energy strikes all parts of the earth's outer atmospheric envelope in equal volume, but due to interference of dust particles and vapors, is materially affected before it reaches the surface of the earth. To discount such influences on the sun's heat, special instruments and apparatus will be used by the expedition in taking the measurements. Rains, snows and dry spells, it is said, are due to the slight variations of the heat we receive from the sun, and analyses of these differences may serve as a guide to a solution of the weather problems as they affect forecasting a long time in advance of changes. It is hoped a process can be devised whereby cyclones that rage over the plains of the middle west, storms at sea, springtime frosts, and even pleasant weather for outdoor celebrations, may be foretold a considerable period before they take place. Surveys will be made in Asia and Africa for a suitable point at which to establish a field station for the scientific expedition.

WHEELS FITTED TO BALLOON TIRES BY HAND ADAPTER

Old wooden automobile wheels may be quickly changed to suit balloon tires by a hand-operated adapter which performs all necessary work for the alteration. Wheels can be removed from any make or type of passenger car, remodeled to take the large treads, and replaced in a single series of a few short operations. The machine is designed for easy installation and requires but little space against a wall or upright support. Tool parts for the various cutting processes may be quickly changed.

Copyrighted material

RADIO

Receiving Set for Travelers Fits in Pocket

A MOST compact and efficient one-tube receiver, so tiny it slips into a pocket with ease, yet big enough to work a loud speaker on local stations or pick up broadcasters 500 miles away under ordinary conditions, is the latest development of the Popular Mechanics radio laboratory.

Designed for the traveling man, or others who want a small, light receiver to carry in a spare corner of the traveling bag, or an overcoat pocket, the little one-tube outfit is an extremely efficient ultra-audion set with a range equal to that of instruments occupying three times the space. A and B-batteries are built into the box, which contains all the instruments, in fact, with the exception of the phones. A single dial is used for tuning, and the only other control is a filament rheostat of the carbon-pile type. Both control knobs and the aerial, ground and phone binding posts are grouped at the top end of the

A One-Tube Regenerative Receiver That Will Fit in the Coat Pocket; Traveling Men Will Find This an Ideal Set

Copyrighted material

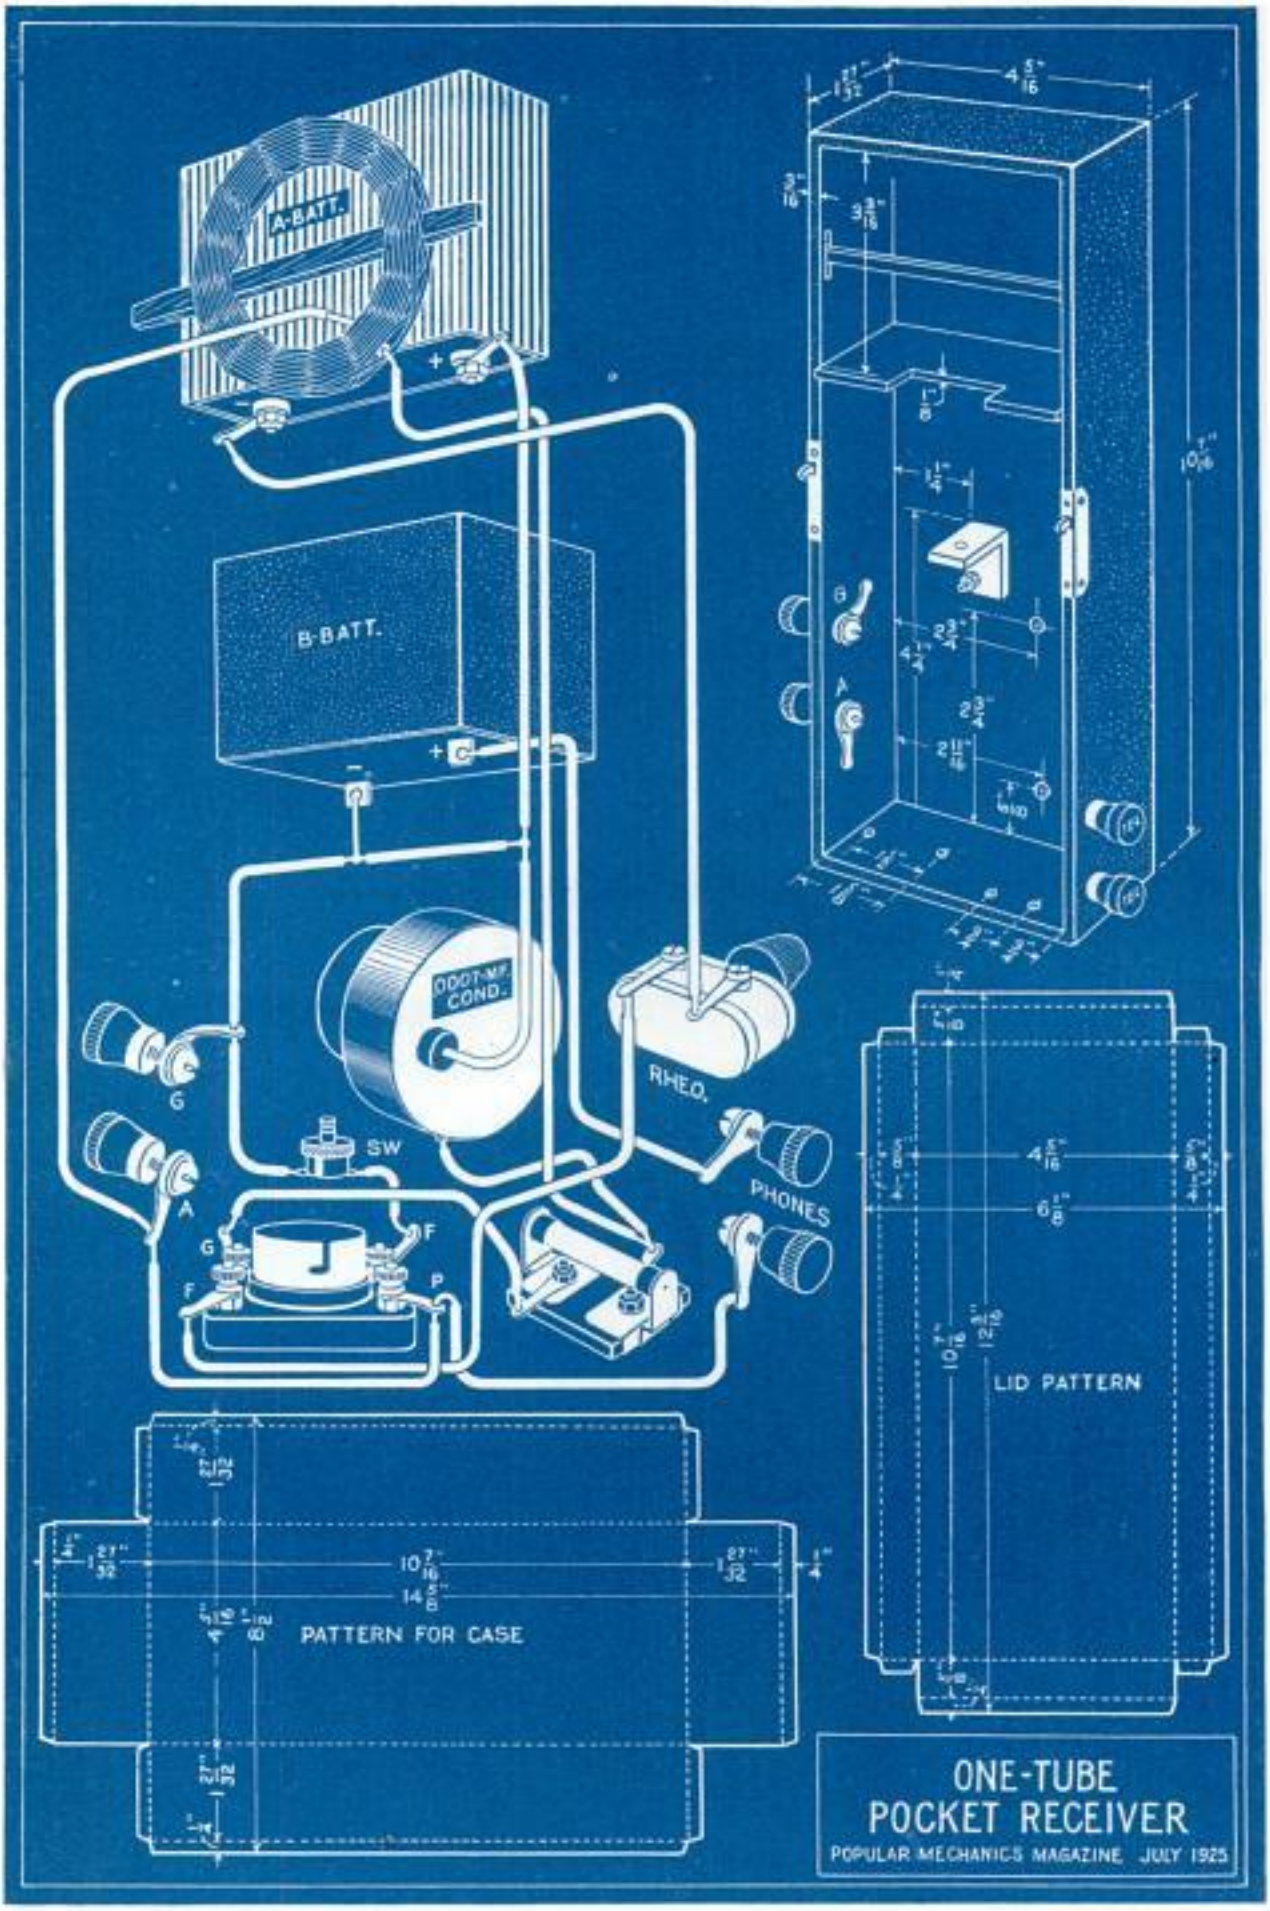

Copyrighted material

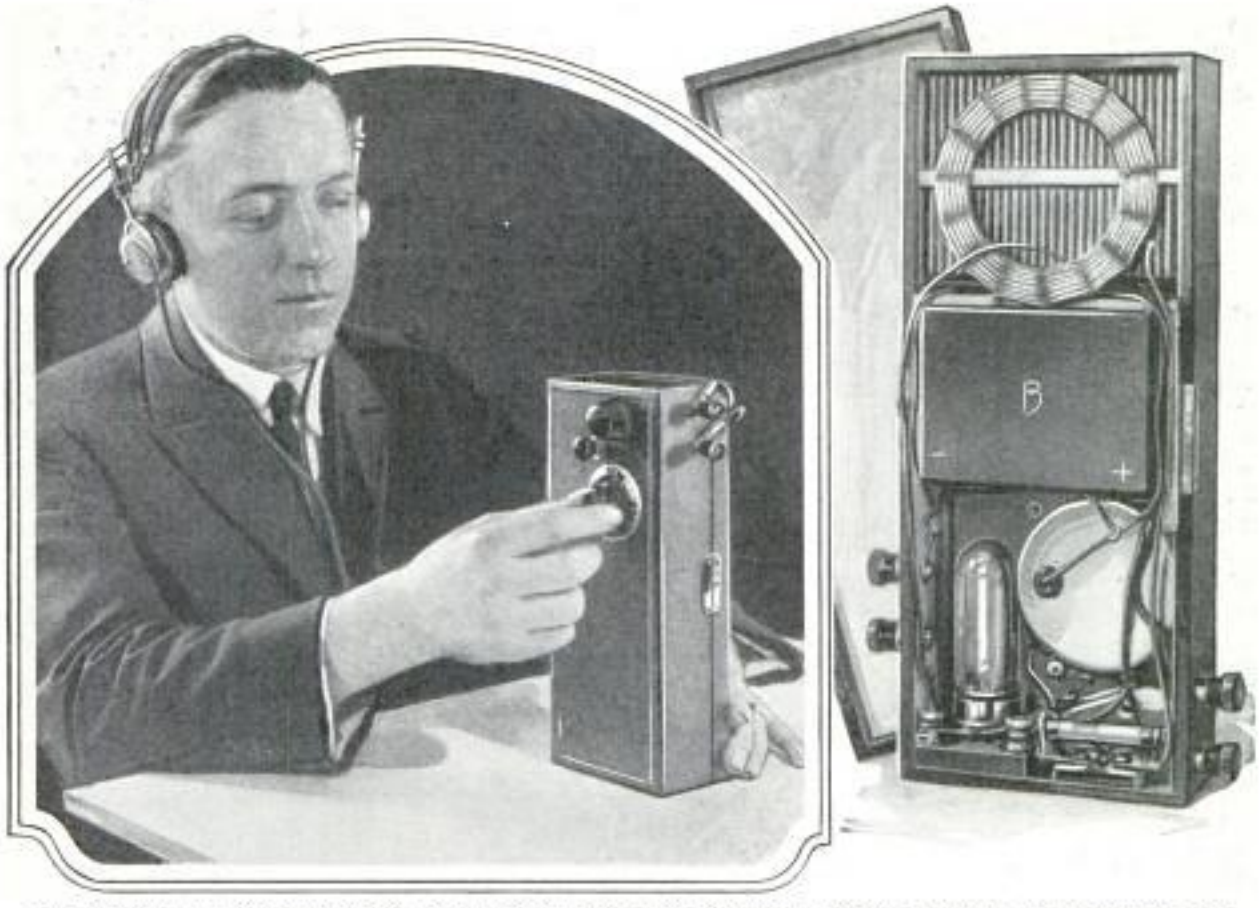

Left, Tuning the Receiver; Right, Back of Set with Lid Removed to Show Location of Instruments and Batteries

box, so that it may be slipped into the pocket, and even operated in that position. The case, a thin basswood glove box, measures but 2½ by 4 5/16 by 10 7/16 in.

To operate the set, pull out the filament switch, and turn up the rheostat until a hissing noise is noted in the phone, then rotate the condenser dial until the station is picked up; three complete turns of the dial bring the condenser from minimum to maximum. The filament rheostat is adjusted to the proper point for best volume and clarity. The condenser is of necessity the smallest type available having this capacity range, and the small dial used is 2 in. in diameter. A partition of ⅛-in. material, cut from a cigar box, separates the A and B-batteries. A large 4½-volt C-battery is used as an A-battery for lighting the filament of the tube. This battery is placed at the end of the box. The coil consists of 70 turns of No. 24 single silk-covered magnet wire, wound on a form made by inserting 15 small finishing nails into holes drilled around a small spool. The wire is wound under two nails and over two nails, until the required number of turns is obtained. Coat the coil with flexible collodion, before removing the nails from the spool; when the collodion has set, the nails can be withdrawn and the coil will be self-supporting. The case is then notched just above the filament battery, and a thin strip of wood run through the coil; this strip of wood fits in the notches and supports the coil just above the A or filament battery. The B-battery consists of a small 22½-volt unit placed in the position shown in the diagram and photo.

The variable condenser, of the single-hole mounting type, is fastened at the right and directly under the B-battery. The rheostat is mounted in the same way just below the variable condenser, and must be turned so as to allow clearance for the push-pull filament switch. This switch is mounted in the space between the variable condenser, rheostat and the tube. The tube socket is a small type suitable for the UV-199 tube, and is screwed to the end of the case. Mount the grid condenser at the right of the tube socket. The capacity of this grid conden-

Full-size blueprints of this set may be obtained by simply sending 10 cents, to cover the cost of wrapping and mailing. Address the Radio Dept., Popular Mechanics Magazine, 200 E. Ontario St., Chicago, specifying blueprint wanted.

Copyrighted material

ser is .00025 mfd., and it should be equipped with clips for the grid leak. A 2-meg. leak is used. The circuit is wired with stranded rubber-covered wire, of small diameter.

The case is now ready for the covering, which is thin leatherette or pantasote. Make a pattern of heavy brown paper before attempting to cut the material. All dimensions for both lid and box are given in the blueprint. These dimensions will vary, of course, if the case used is of a different size, and the pattern will have to be cut accordingly. Cut this pattern out, fit it to the box, cut holes for the instrument shafts, and binding posts, and trim to exact size. Now lay the pattern on the back of the material and outline with chalk or colored pencil, cut the material, and glue it to the case with a good grade of liquid glue, smooth out and allow to dry. The nickelplated catches on the lid and box can be obtained from a hardware store or luggage manufacturer. The case and lid are notched for these catches after the covering is on the case, and then they are nailed in place with small brads, obtained from a cigar box. After remounting the binding posts, the condenser dial and rheostat knob, the instrument is ready for operation.

When traveling, a temporary aerial can be used, such as a bed spring or window screen, but for more permanent use, run two or three turns of bell wire behind the picture molding of the room, bringing one end down to the aerial post. For a ground use a near-by water pipe. When used in the open, a wire attached to a rope thrown over the limb of a tree makes a good temporary aerial. The circuit used in this little set is highly regenerative and almost any type of aerial will give results on near-by stations.

MATERIAL LIST

1 socket for UV-199 tube.
1 push-pull filament switch.
1 .00025 dubilier grid condenser with leak clips.
1 grid leak, 2 meg.
1 UV-199 tube.
1 Eveready 22½-volt B-battery, type 763.
1 Burgess 4½-volt C-battery, type 2370.
4 binding posts.
1 Bradleystat.
1 Connecticut variable condenser, panel type J-108.
¼ lb. No. 24 single silk-covered magnet wire.
1 wood glove box.
½ yd. thin leatherette.
1 brass strip 1-16 by ½ by 2½ in.
2 small snap-lock catches.
3 feet small stranded rubber-covered wire.
12 soldering lugs.
Total cost $15.00.

An Efficient Lightning Switch

The lightning switch shown in the illustration is very efficient, and can be made at low cost. Three pop bottles are used. The bottles are mounted in a triangle. The switch arm is wood, and has a flat brass strip mounted on its under surface; this strip is bent so as to engage the clips on the lower insulators. The switch arm is hinged to the top of the upper bottle, by means of a heavy wood screw mounted in a tightly fitting wooden plug driven into the neck of the bottle. The clips on the lower bottles are old switch clips and mounted in the same manner.

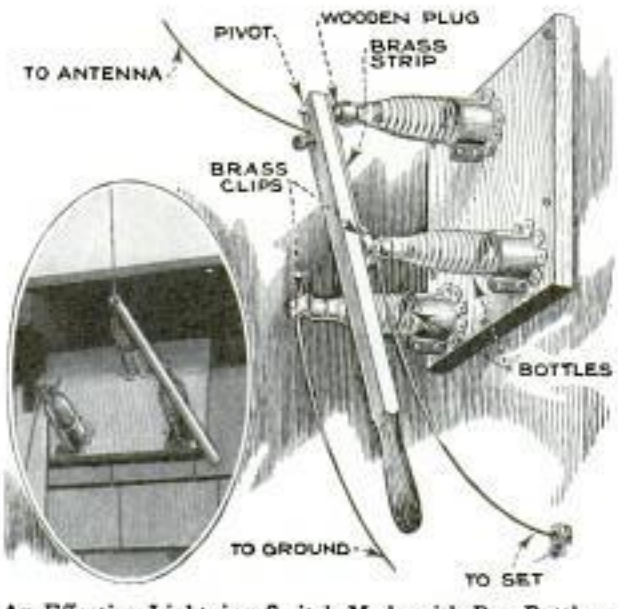

An Effective Lightning Switch Made with Pop Bottles; Insert, Switch Mounted on Exterior of Building

The mountings for the bottles can be made from scraps of sheet metal, bent to form collars, the lower edge of the mountings being slit with tinner's shears or a hacksaw to form a base to screw to the board, and the mounting or collar is drawn tightly around the bottle by means of two stove bolts as shown. The aerial wire is connected to the switch arm near the pivot screw. A small brass machine screw is used to obtain a good electrical contact to the metal strip under the wooden arm and the aerial connection should be soldered under this screw. The ground and the lead to the set are connected as shown.

Copyrighted material

Wood Hinge on Cabinet Aids Efficiency

Stray capacities are detrimental to many sets, and it is to eliminate one cause of stray capacity that a new cabinet has been developed. This, instead of the common metal hinge, has a hinge made of mahogany, the same wood as that used for the body of the cabinet. The effect of the common metal hinge on the circuit, it is said, has been demonstrated in the case of a neutrodyne receiver, which, although perfectly neutralized when out of the cabinet, had to be neutralized again as soon as it was placed in the latter and came within the influence of the long metal hinge.

Battery Has Built-In Visible Hydrometer

The radio beginner's objections to the standard-type storage A-battery, which must be carefully watched to keep the water level correct and the charge up, are removed by a new type of battery with glass shell. The high and low-water level lines are blown in the glass, and the actual level of the liquid is constantly visible. Readings to tell the state of charge are made on a built-in hydrometer in one of the end cells, two small wax balls of different specific gravity being used. When both balls, which are contained in a slot, are at the top of the liquid, the battery is fully charged, and when both are at the bottom, as shown in the picture, the battery is discharged. Because of their different weights one ball drops first, indicating the battery is one-half discharged. The unit has a thirty ampere-hour capacity.

¶THE 5-TUBE NEUTRODYNE was completely described in our February and March, 1924, numbers. This set will operate a loud speaker on stations up to 1,500 miles, and is very easy to tune and log. These issues may be obtained (25 cents each) from the Circulation Department.

Loud Speaker Made from Paper Cone

A simple loud speaker, which gives a good tone and volume can be made by anyone from a disk of thin cardboard or stiff paper. The disk is cut radially and the edges of the cut drawn up to form a wide cone. A pin is fastened in the center and soldered to an ordinary headphone diaphragm, as shown. The cone may be pleated as shown in the illustration, but this need not be done unless desired.

Stiff-Paper Cone Makes Loud Speaker of Good Tone and Volume

Easily Made Rest Is Useful in Soldering

The fan who has burned a spot on the top of his table when building the set by absent-mindedly putting down the hot soldering iron on it, appreciates the advantage of some sort of rest for the iron. It is a very simple matter to make a practical rest from a couple of short lengths of left-over busbar wire and a piece of wood. Eyes for screws are bent at the ends of the wires, and the middle parts formed to a V-shape in which the iron rests as shown in the illustration. The supports are fastened to the wood by means of screws driven through the eyes, as indicated.

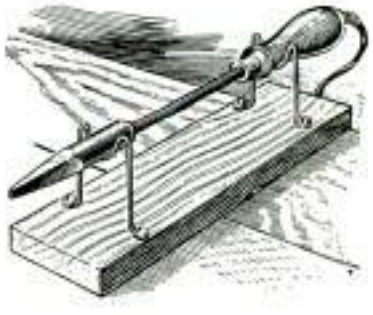

Copyrighted material

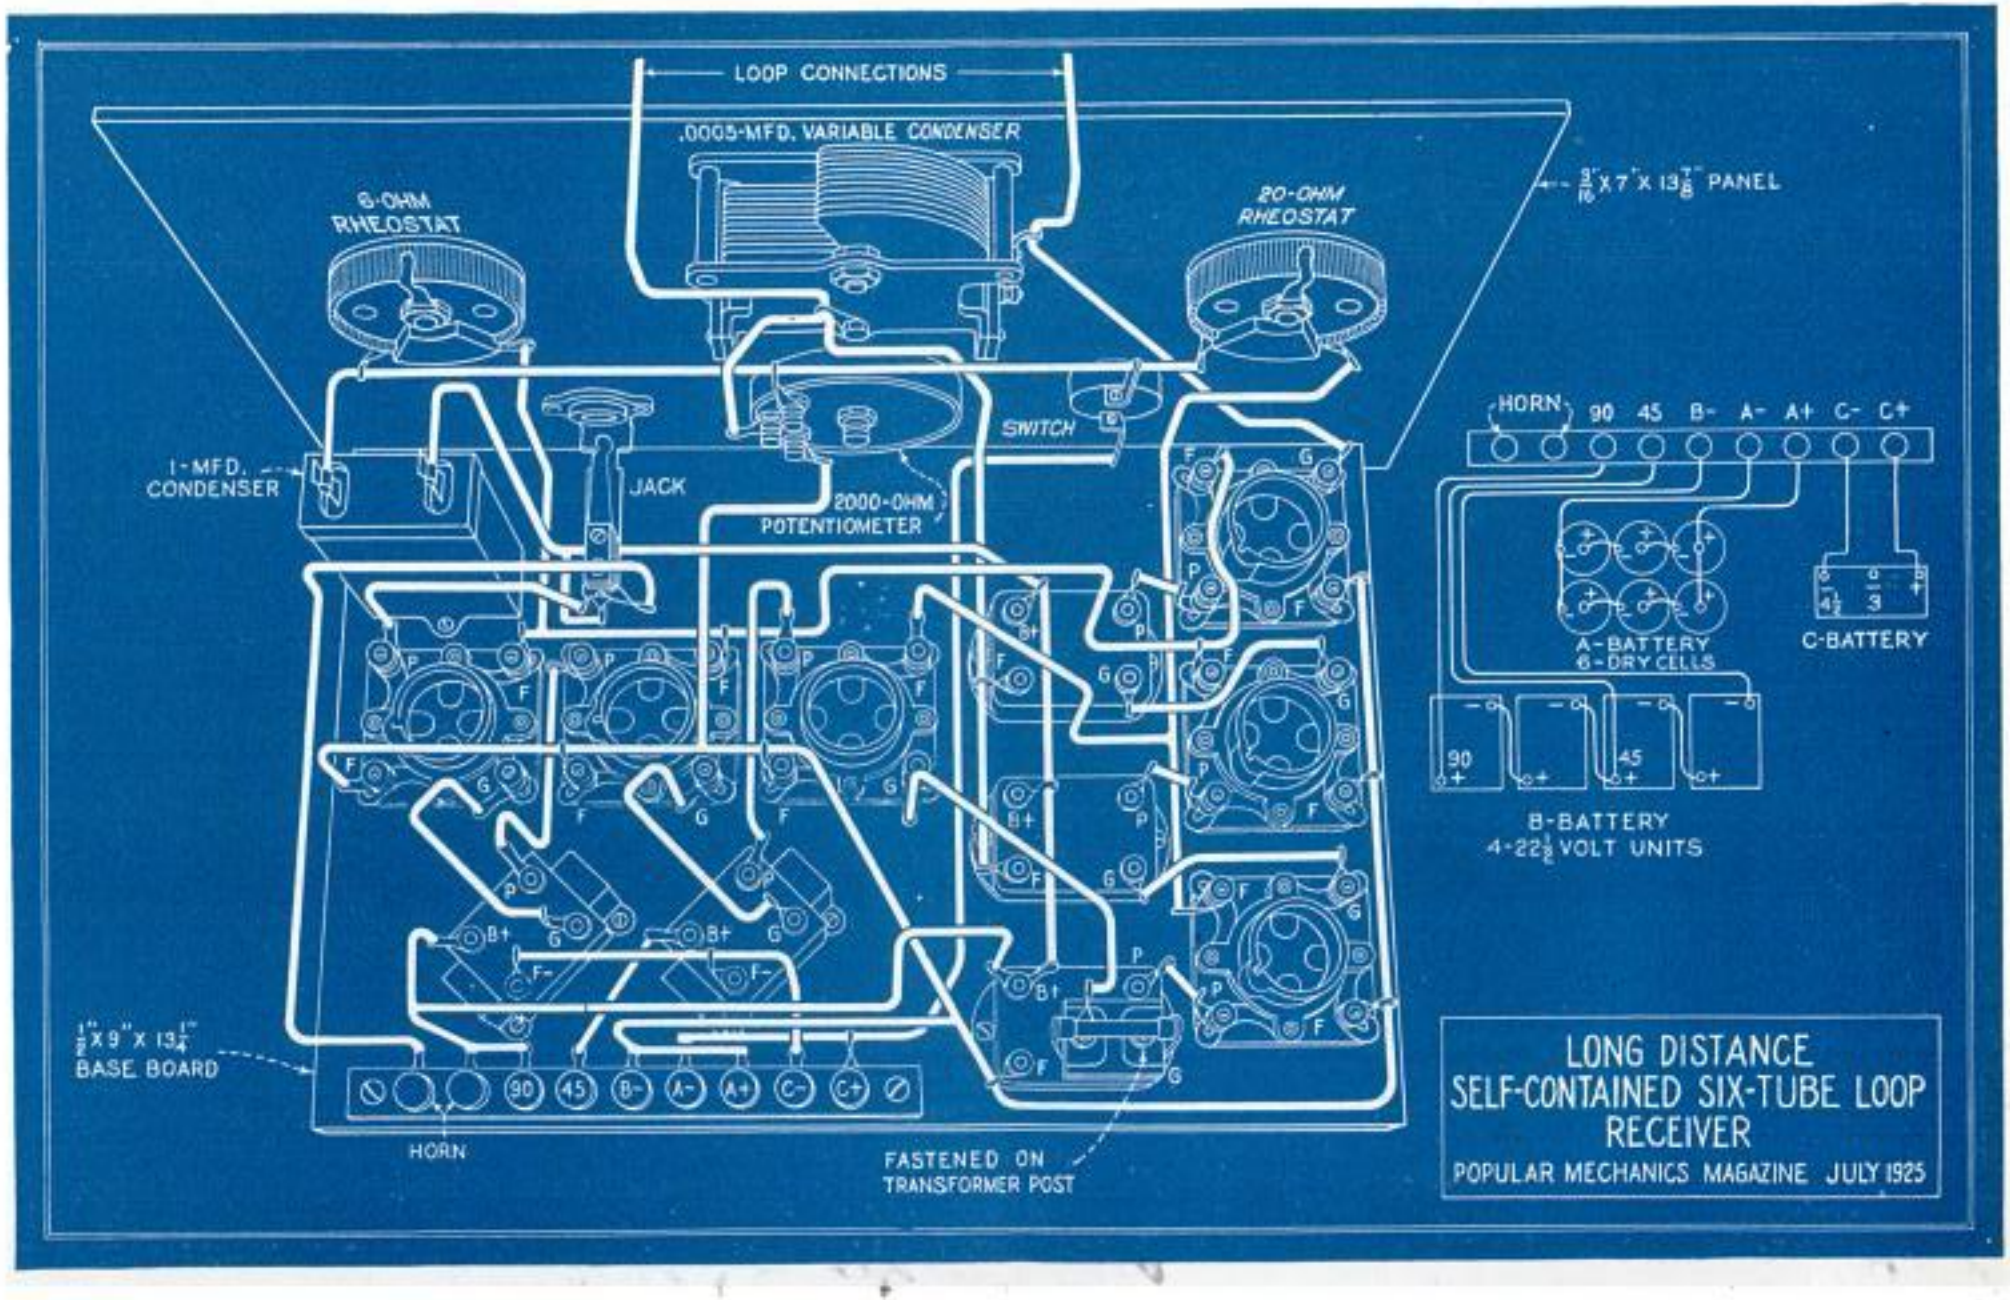

Copyrighted material

Six-Tube Self-Contained Loop Set Has Coast-to-Coast Range

By F. L. BRITTIN

THERE is a constant demand for a six-tube, self-contained loop receiver, capable of coast-to-coast reception, that can be operated on dry batteries. The instrument described herein was designed in Popular Mechanics radio laboratory in response to this demand. The results have been carefully checked, and we are satisfied that this receiver will meet all the requirements of our most exacting radio friends. In order that it may rightly be called a self-contained receiver, the A and B-batteries, as well as the horn, are incorporated in the cabinet with the instrument. The receiver is designed for loop operation, although it can be used with an outside aerial; best results, however, are obtained with the loop. The instrument tunes more closely on the latter, and interference from other stations and static are minimized. The use of an outside aerial tends to broaden the tuning, and bring in extraneous noises.

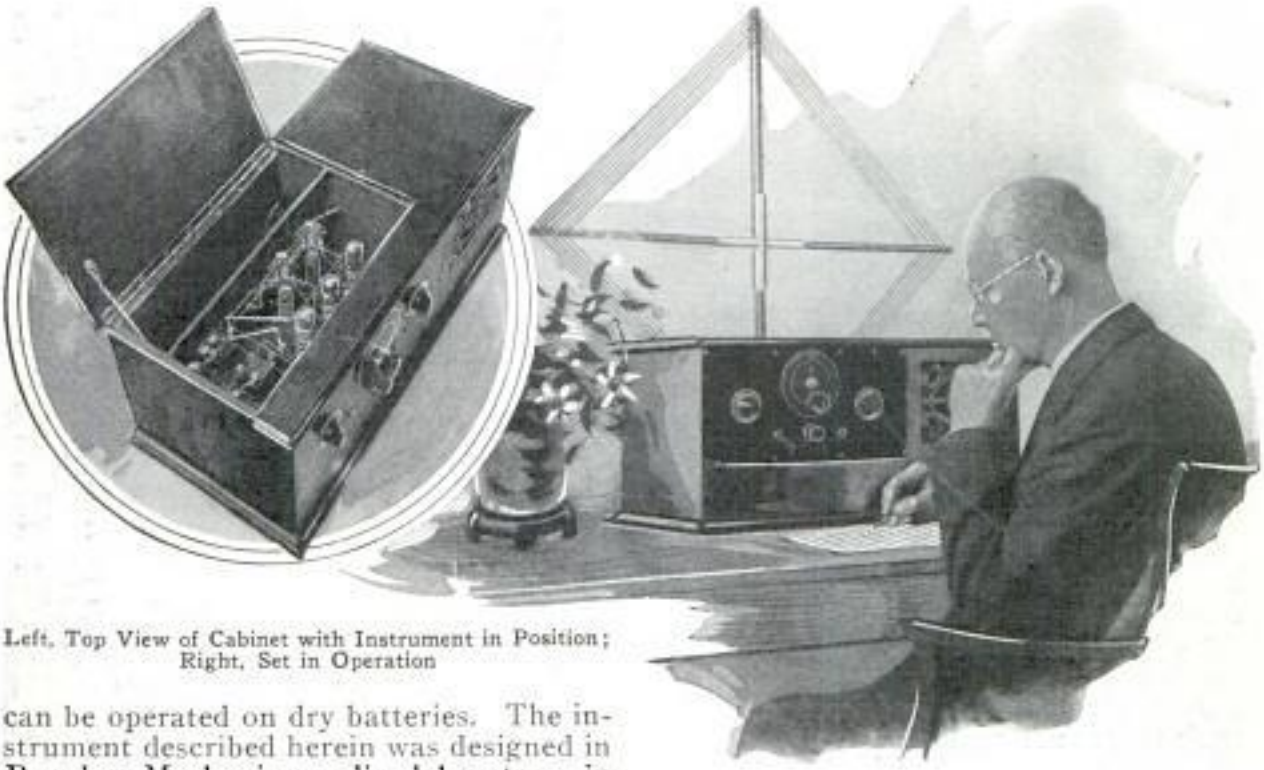

Left, Top View of Cabinet with Instrument in Position; Right, Set in Operation

Good tone, long distance and selectivity are the outstanding features of this receiver. Twenty-seven stations were logged in one evening from Chicago, with good tone and very satisfactory volume on the loud speaker. These stations included Washington, Pittsburgh, Schenectady, Detroit, Cincinnati, Jefferson City, Fort Worth and Los Angeles, all on the loop. No ground is used. The self-contained feature appeals to the feminine members of the family, because there are no messy storage batteries or trailing wires to be kept in order, and its ready portability permits the operator to move the instrument quickly from one room to the other. The instrument is easy to build, and the cost is about $110, which is not high for a set of this type, including, as it does, tubes, batteries, cabinet with built-in loud speaker, and loop.

When in operation, place the loop at least 6 ft. from metal objects, such as steam radiators or heating pipes, which would be likely to absorb a part of the energy that would otherwise go to the loop. In buildings where there is an appreciable amount of steel construction, this becomes a real factor with any loop receiver, and the loop will often lose its directional effect, if the set does not refuse to operate at all on distant stations.

It is best to obtain all the parts before beginning construction. The front-panel and baseboard layouts are very simple and clearly shown in the blueprint diagram. The dimensions of the panel and baseboard will vary, of course, according to the size of the cabinet used. No. 14 tinned-copper busbar is used throughout the circuit. Spaghetti tubing is not necessary unless some of the leads should run so close together that there would be possibility of their touching. Keep all plate

Copyrighted material

and grid leads well separated and do not parallel them. Where it is necessary to cross these leads, do so at right angles.

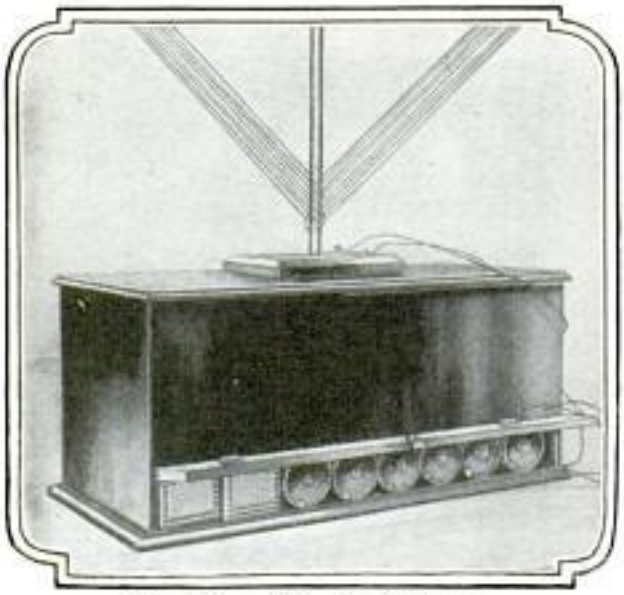

Rear View, Showing Batteries

Use soldering lugs under all binding posts, and use solder and flux sparingly.

The A, B and C-battery connections are shown in the blueprint diagram at the right of the instrument. The A-battery consists of six No. 6 dry cells connected in series-parallel. The A-positive and B-negative terminal posts are connected together at the terminal strip, but the A-negative terminal is not connected to them. The B-battery consists of 22½-volt units connected in series; the C-battery is a 4½-volt unit. Flexible rubber-covered wire is used to connect these batteries to their respective binding posts on the terminal strip. The arrangement of the A, B, and C-batteries in the lower compartment of the cabinet is shown in the rear view of the cabinet. Only two of the B-battery units can be seen, as they are placed one pair behind the other. The reader will note the position of the A-battery cells; the C-battery is placed behind these cells, and does not show in the illustration. The leads are taken up to the binding-post terminal strip through holes in the upper instrument compartment; the flexible leads are taken through holes drilled in the rear of the cabinet. The cabinet is well designed and very compact; it may be built by the reader if desired, but can be obtained from a radio dealer or direct from the manufacturers. The horn is built into the cabinet. This construction is clearly shown in the front view on this page, showing the horn partly pulled out; the grill shown in the illustration is screwed in front of the horn when assembled. The cabinet is 23⅜ in. long, 11¼ in. high and 10⅝ in. deep in over-all dimensions. A wood partition divides the horn compartment from the instrument.

The instrument should be tested for shorts before mounting in the cabinet, the batteries temporarily connected to the terminals, and each socket tested successively with one tube, or a test lamp of the flashlight type, before placing all the tubes in the sockets. Turn up the rheostats for this test. If all connections are correct,

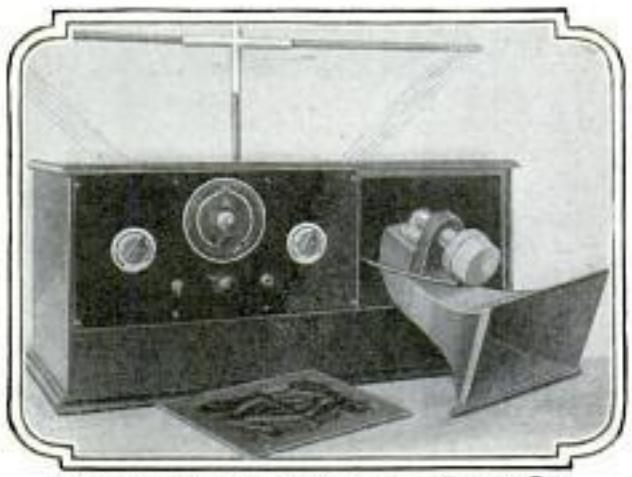

Cabinet with Loud Speaker Partly Drawn Out

turn off the rheostats and place all the tubes in the sockets. The instrument can now be mounted in the cabinet and the battery terminals connected; the terminal

MATERIAL LIST

1 bakelite or formica panel, 3-16 by 7 by 14 in.
1 baseboard, ¾ by 9 by 13¾ in.
1 Cardwell variable condenser, .0005 mfd.
1 vernier dial.
2 audio-frequency transformers, ratio 3½ to 1.
3 Dubilier duratran radio-frequency transformers, range 225 to 550 meters.
6 tube sockets for UV-199 or C-299 tubes (spring or sponge rubber base).
1 small toggle filament switch.
1 by-pass condenser, 1 mfd.
1 6-ohm rheostat.
1 20-ohm rheostat.
1 2,000-ohm potentiometer.
1 .00025 Dubilier grid condenser with clips.
1 3-meg. grid leak.
9 binding posts.
1 terminal strip, bakelite or formica, 3-16 by ⅝ by 7½ in.
1 jack having three terminals; two springs; one break contact; frame insulated.
6 No. 6 dry cells.
4 No. 5156 Burgess B-battery units, 22½ volts.
1 No. 2370 Burgess 4½-volt C-battery.
6 UV-199 or C-299 tubes.
1 cabinet with built-in horn, and battery compartment as specified.
1 loop, standard type.

Copyrighted material

cord from the horn is brought through the wood partition and connected to the binding posts provided on the terminal strip, marked "horn." The loop is connected, and the set is ready for operation.

Do not screw the instrument panel permanently in the cabinet until the instrument is thoroughly tested on distant stations. It may be necessary to try several different tubes in the detector socket until one is found that gives the best results in this position. Also switch the other tubes around for best position. The grid leak is another critical instrument; try several leaks of varying resistances, for instance, a 2, 3 and 4-meg., one of which will be found to give the best results. The following instructions will be found helpful in tuning the set. Turn on the filament switch, turn up the 6-ohm rheostat which will be designated as the volume control, and the 20-ohm rheostat which controls the filament voltage on the detector and third stage of radio-frequency amplification, both to a point about two-thirds over. Also turn up the potentiometer to about the same point. Now slowly rotate the vernier dial on the variable condenser until the station whistle is picked up in the horn, then back off the rheostats and the potentiometer until the station comes in clear, at maximum volume. To obtain this result, it may be necessary to change the setting of the vernier dial, and also to turn the loop a little. The detector rheostat and the volume-control rheostat, together with the vernier-condenser dial, are the "tuning" elements. It is not often that the potentiometer setting need be changed, but it will be found critical on the distant stations. The settings of the rheostats will, of course, vary a little according to the condition of the batteries. The vernier-condenser dial setting will always remain the same on the same loop, and can be permanently logged.

Full-size blueprints of this set may be obtained by simply sending 10 cents, to cover the cost of wrapping and mailing. Address the Radio Dept., Popular Mechanics Magazine, 200 E. Ontario St., Chicago, specifying blueprint wanted.

Handy Logging Dial Aids in Locating Stations

A handy logging dial that acts as a key to the set is now available. The dial is placed on or near the receiving set. A metal base is provided to hold it upright, by means of two small bolts and nuts. Twenty-four of the larger stations with their call letters are listed around the outside margin of the disk. These stations are listed in rotation according to their wave lengths. As the disk is rotated, it will be noted that there is a space on it for logging the position of the various dials, and the time of the day the station is on the air. This space appears in the slot just below the station call letters. The reverse side of the dial is similarly arranged, to provide logging space for additional stations, so that the capacity of the log is 48 stations in all. Changing the length of the aerial, or moving the set to another location, of course, will make a variation in the position of the dials for tuning in a certain station.

The arrangement of the stations according to their wave lengths aids the operator in tuning to stations not yet heard, by comparing the settings of the control dials, on stations of similar wave length to that of the unlogged station. The operator would then know that by moving the dials a point or two either way, stations on wave lengths a little above or below the known setting, would come in. It is understood that the operator knows that the new station is on the air. A blank space is provided on the margin of the dial after each number, to be used if the wave length is changed.

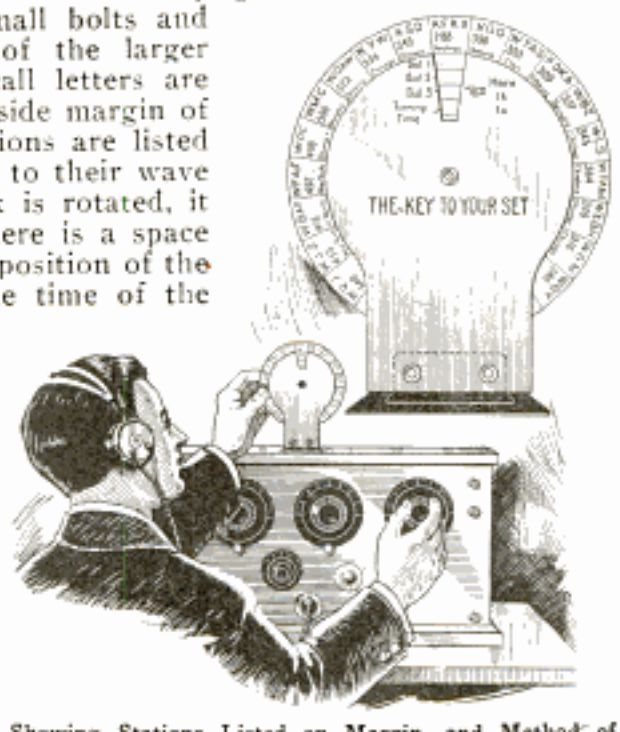

Showing Stations Listed on Margin, and Method of Mounting the Unit on the Receiver

Copyrighted material

Trouble-Shooting in Eight-Tube Superheterodyne Receiver

OUT of the hundreds of readers who have built the Popular Mechanics Superheterodyne-Eight, very few experienced any trouble, and these had either not followed directions, had overlooked one wire or some defective part was the cause. The experienced builder is as likely to overlook some essential wire as the amateur, and defective parts may fall to anyone's lot, so there is little to blame the builders for in these few cases.

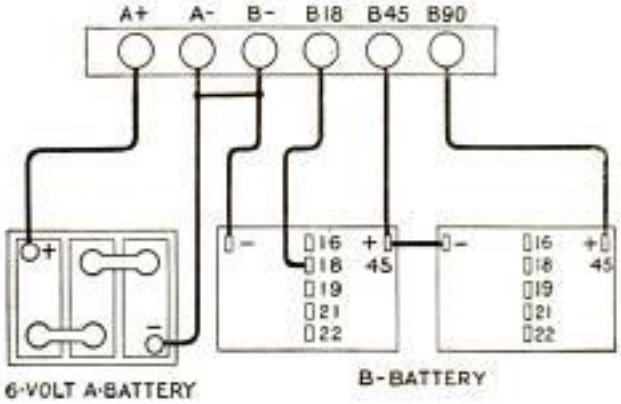

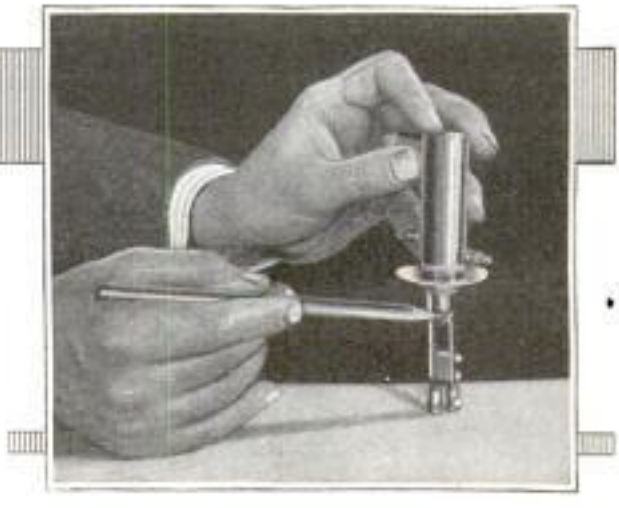

Left, Testing Transformer; Upper Right, How the Batteries Are Connected; Lower Right, the Loop Jack

An imperfect instrument is generally harder to find than a missing wire. One of the small fixed condensers may be defective and cause spluttering that is difficult to trace. They are unbelievably delicate and extreme care should be taken in soldering them. One has a capacity of but .00025 mfd. and is used across the secondary of the tuned-stage transformer. This condenser is shown mounted in an upright position in the close-up. It is very critical, and must be as near its rated capacity as possible. The manufacturer has just placed a new type, known as No. 640, on the market, for which he claims a very close approach to perfection.

If your set splutters and fries, and the noise is not static, look to these condensers. Next to the one on the tuned-stage transformer, the 1-mfd. by-pass condenser across the total B-battery is most likely to cause trouble. If it is defective, the tone will be poor, especially when the loud speaker is connected in the horn jack.

Other possible trouble makers are the .006-mfd. condenser connected from the sixth tap of the coupling unit to the filament negative post of the oscillator tube, and the .0025-mfd. condenser connected to the No. 3 post of the coupler and the filament negative line.

Wiring troubles may range from omission of one or more wires to inductance caused by paralleling grid and plate leads, or leads cutting the electrical field of the coupler. The lead from the oscillator condenser to the grid of the oscillator tube should run under, not over, the coupling unit. Drop straight down from the condenser to the subpanel, run across it to the tube socket, and then come up to the grid terminal, and trouble will be avoided. Unless the prongs of the loop jack make contact properly, the wave-length condenser will have no tuning value. It may be necessary to bend the prongs until they take a firm hold of the loop plug.

A defective transformer is very rare.

Copyrighted material

Test it for open coils by connecting a dry cell and a pair of headphones in series, then applying the two loose end wires first to the primary and then to the secondary taps on the instrument. If the winding is in good shape, a distinct click will be heard as contact is made. If there is a break, there will be no click. Don't try to take the transformer apart and fix the winding yourself. Send it back to the dealer to be exchanged for a good one.

Make sure that the shields separating the banks of tubes do not touch any metal part of transformers, rheostats or potentiometer. Cut a notch in the shield to clear the projection if contact seems likely. If the right-hand shield is placed close to the first intermediate-frequency transformer, it is very apt to come in contact with the B soldering lug. Excess paste used when building the set may have run down the lugs and formed an insulating shield around the terminals which will cause trouble unless removed. In looking for excess paste, also go over the terminal nuts and tighten them thoroughly, and inspect every soldered joint to make sure that it is mechanically perfect and furnishes a good electrical contact. Such a joint should be so strong that you can grasp the wire with a pair of pliers and give a good pull without breaking the solder. A single loose terminal nut may cause an endless amount of trouble. One builder completed a set and it didn't work. He went over the wiring carefully, finding everything apparently correct. Finally he decided to change a grid leak, and at once the receiver worked. The trouble was that one of the connections was loose.

If a tube fails to light, the trouble may be that the spring clips do not make contact with the tube prongs. Inspect the clips and be sure that the tube is pressed down and turned into position.

The vernier rheostats specified have a nut that holds the arm in place, and this is very apt to become loose if the rheostat is turned up too far; see that these nuts are tight. This fault has been corrected by the maker, so users of the new style will experience no trouble.

The oscillator tube is another possible source of trouble. To tell whether it is oscillating, moisten the finger tip and place it on the grid terminal of the tube socket. A click will register in headphones or loud speaker when the terminal is touched and again when the finger is removed. If the tube is not oscillating, there will be but one click, instead of two. In this case, the tube may be worn out or defective; the socket springs may not make contact; the midget condenser or coupling unit may not be set properly; there may be an error in wiring, or the oscillator and master rheostats may not be turned up far enough to start oscillation. Both must be turned up to make the tube work.

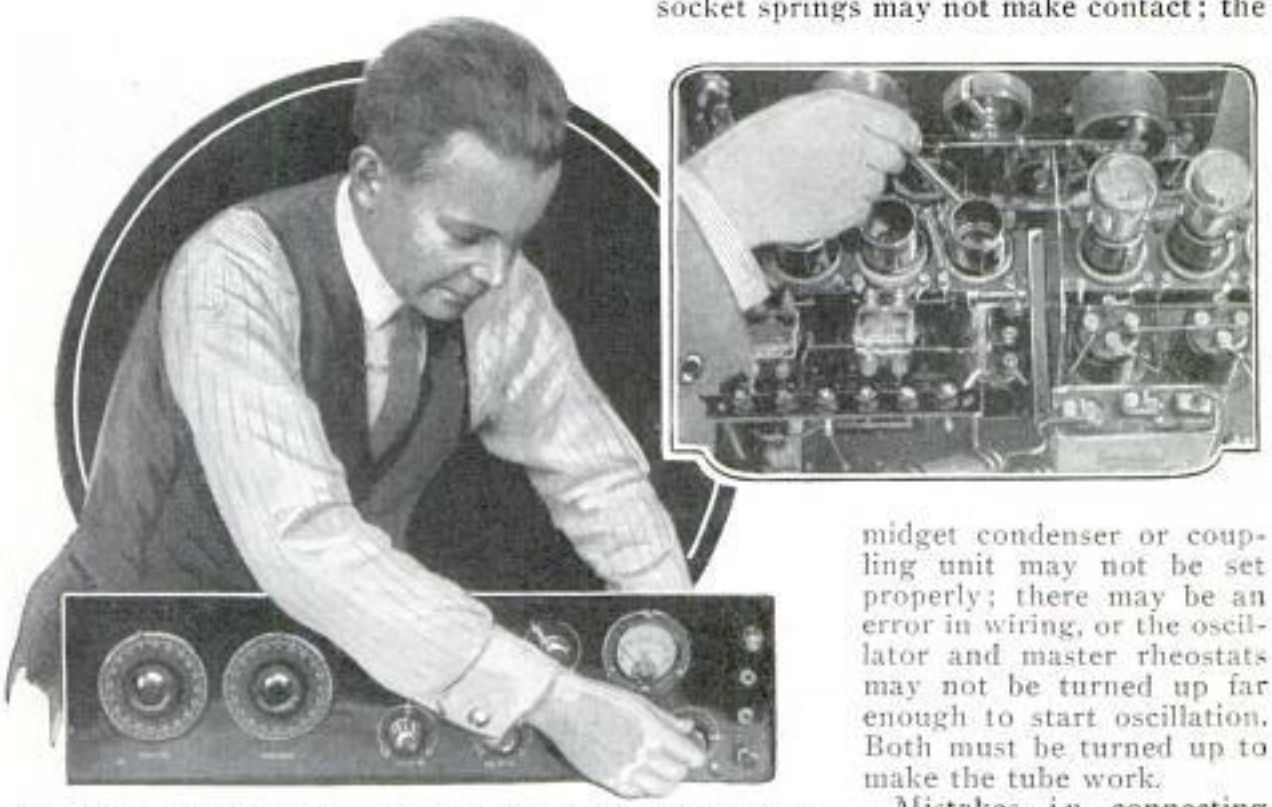

Left, Testing the Master Rheostat; Right, Position of .5-Mfd. By-Pass Condenser below Sockets

Mistakes in connecting the B-batteries also cause trouble. There are three B-voltages used in the super-eight—18 on the oscillator plate and on the first detector-tube plate, 45 on the plates of the three intermediate frequency stages and the second detector, and 90 on the plates of the two audio tubes.

Copyrighted material

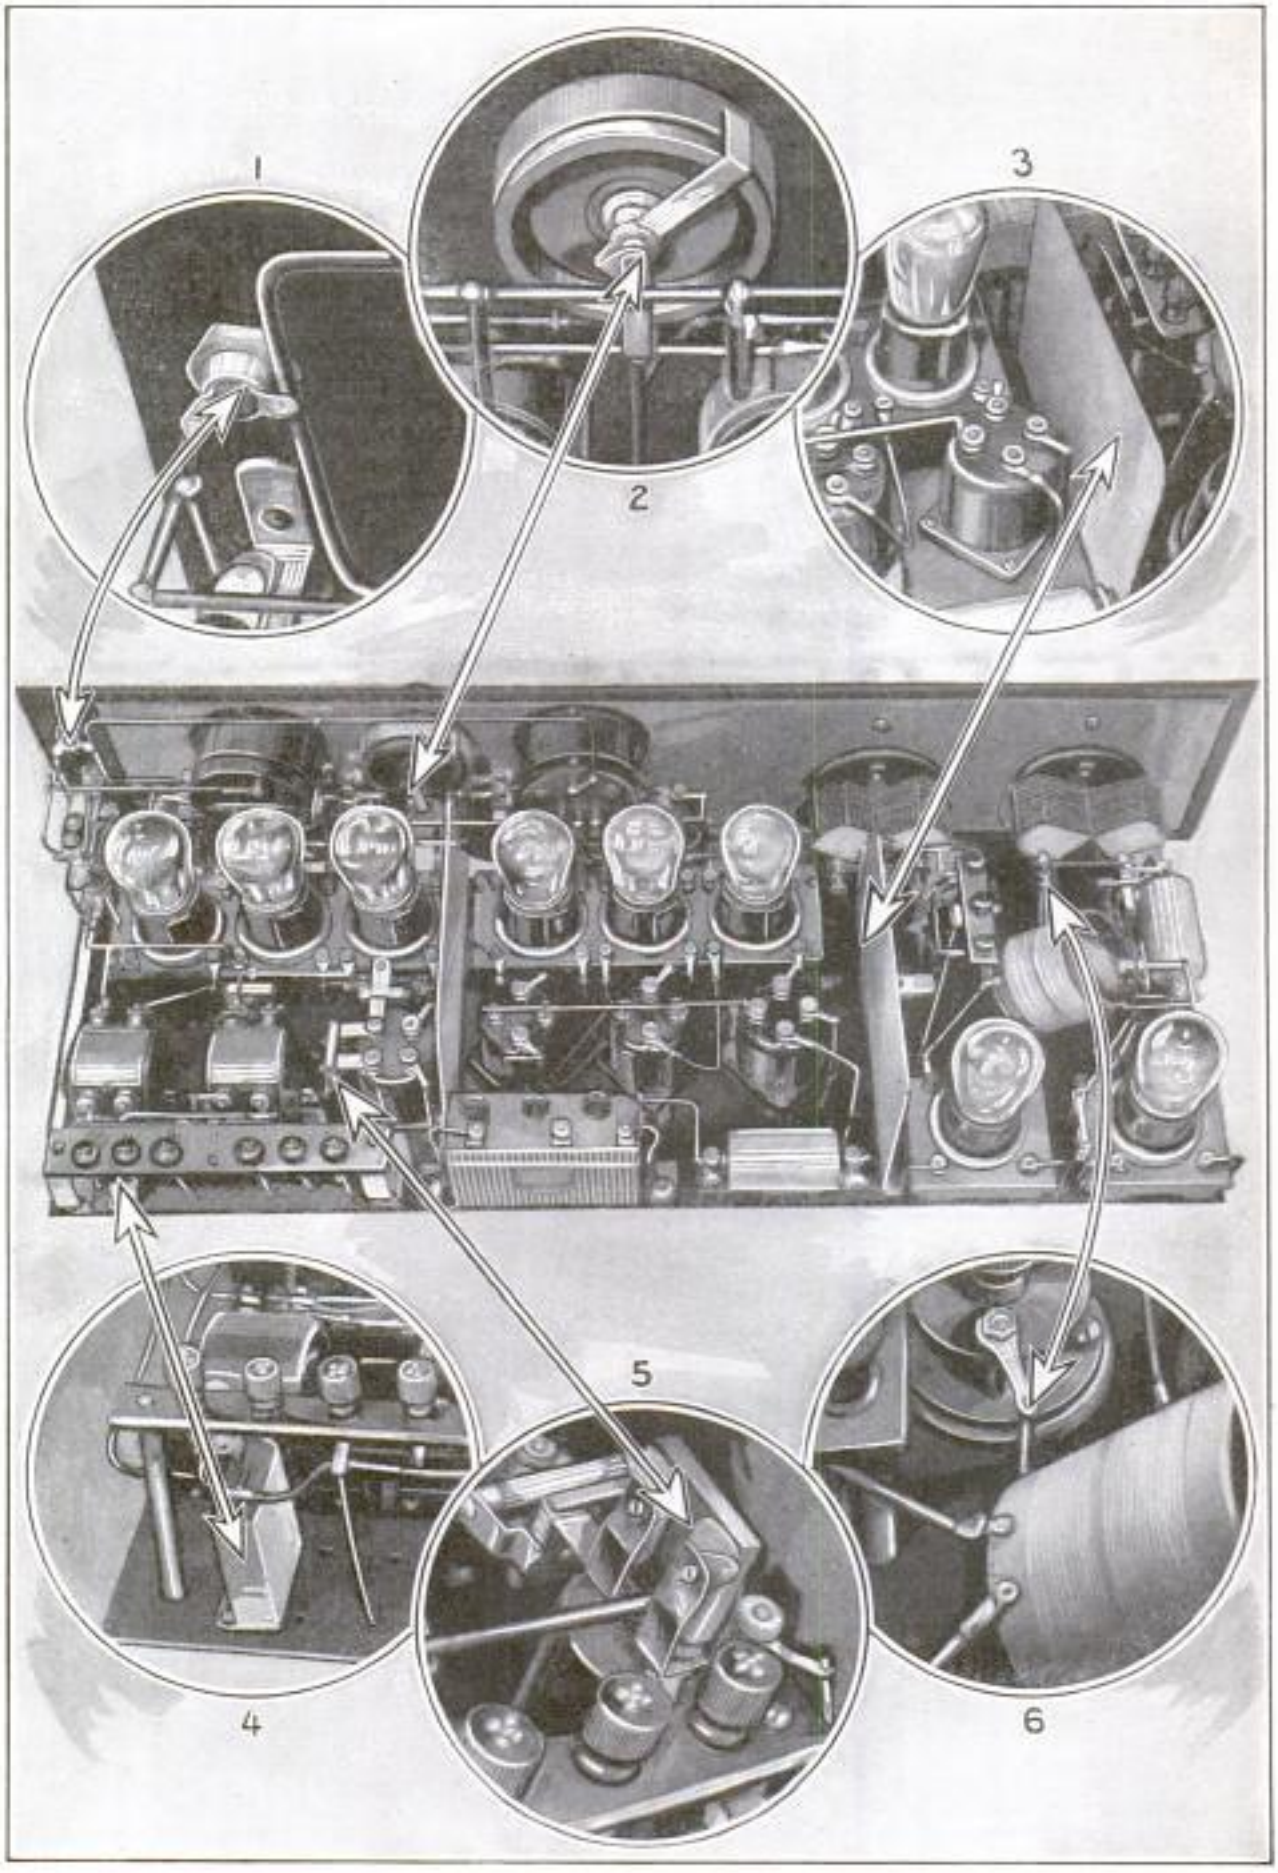

Fig. 1, the Pilot Light; Fig. 2, Potentiometer Nut; Fig. 3, Shield; Fig. 4, By-Pass Condenser; Fig. 5, .00025-Mfd. Condenser, and Fig. 6, the Wiring around the Coupler

Copyrighted material

Checking the wiring looks like a difficult task, but is simple if systematically done. Take the wiring blueprint and start with the negative filament, or A-battery line; then follow it through from the battery binding post until you have checked every tap on the blueprint with the corresponding connection on the set, marking each tap on the diagram with a cross as you go along. Then do the same with the A-positive line, following with the B-negative and positive and the 45 and 18-volt lines. Check also the wiring of the filament switch and panel pilot lamp against the diagram. The pilot lamp is wired across the A-lines, while the switch is in series in the A-positive line. In effect, the lamp is in parallel with the switch. The possible error lies in getting the light in series, the same as the switch, throwing its resistance into the filament line and causing trouble.

Another chance for error lies in reversing the leads from the .5-mfd. by-pass condenser which is mounted beneath the left-hand three-gang socket. One wire from the by-pass condenser goes to the center arm of the potentiometer, and, continuing from the condenser in the opposite direction, leads to the positive pole of one of the 1½-volt flashlight batteries. The two outside poles of the potentiometer are connected, one to the A-positive and the other to the A-negative line, and the other side of the by-pass condenser also leads to the A-negative line. The result is that when the potentiometer arm is set to give the proper negative bias to the grids of the three intermediate frequency tubes, the 1½-volt battery acts as a booster, insuring stabilization, and the bias does not depend on the drop across the A-battery as is usually the case. Both the small flashlight batteries and the 4½-volt C-battery should be tested to make sure they are not dead. Regeneration plays an important part in securing selectivity as well as volume and distance, but if carried too far the circuit will "slop over" and become mushy. Resistance within the set is one of the factors standing in the way of selectivity, and regeneration, when properly used, tends to break down this resistance. The midget condenser, mounted on the subpanel, is used to give just the right value of regeneration, and when once set, like the coupling unit, it requires no further attention.

Map on Loop Aerial Hides the Wires

A loop aerial with the wires concealed behind a colored map of the United States listing the principal broadcasting stations, has been devised for those who dislike the appearance of the ordinary article and also want a guide within convenient reach while using their sets. It is inclosed within a wooden frame of pleasing appearance and rests on a substantial base, upon which is a scale for marking the position of the loop that gives the best reception on the various stations. A special plug permits turning without twisting the connecting wires. The map is designed after those of the sixteenth and seventeenth centuries and is decorated with quaint old compasses and galleons such as were used long before radio sped across the oceans. The loop has sufficient wires to cover the wavelength range that can be received on a variable condenser of .0005-mfd. capacity.

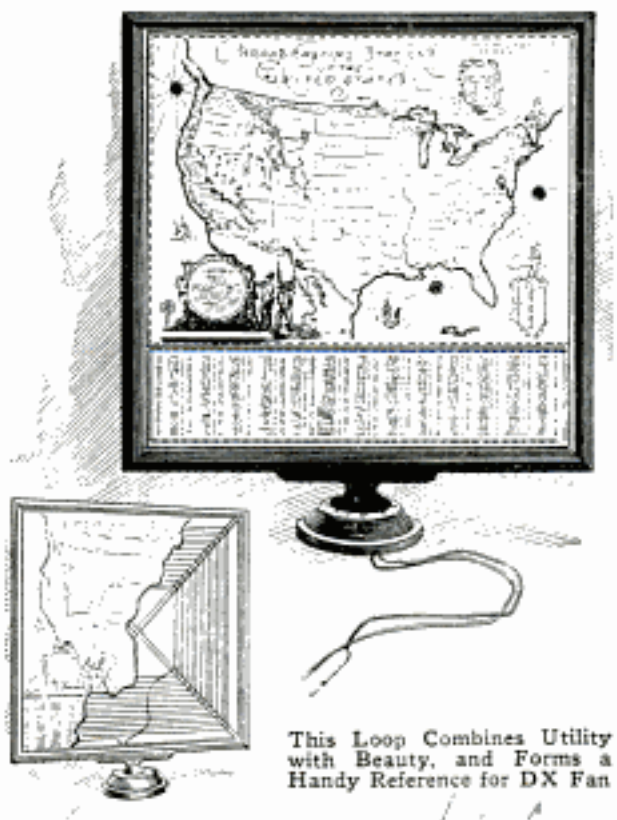

This Loop Combines Utility with Beauty, and Forms a Handy Reference for DX Fan

Metallic Grid Leak Is Stable

A metallic film of high resistance, which is actually annealed to a glass rod or tube, is the feature of a grid leak recently placed on the market. It is claimed that the resistance thus produced is unusually stable, due to the fact that the film cannot wear off, or become detached from the glass in any other way.

Copyrighted material

535 R. Diamond State Fibre Co Bridgeport Pa.

Knockdown Cabinet Readily Assembled by Amateur

So amateur radio builders may have the satisfaction of making their own sets

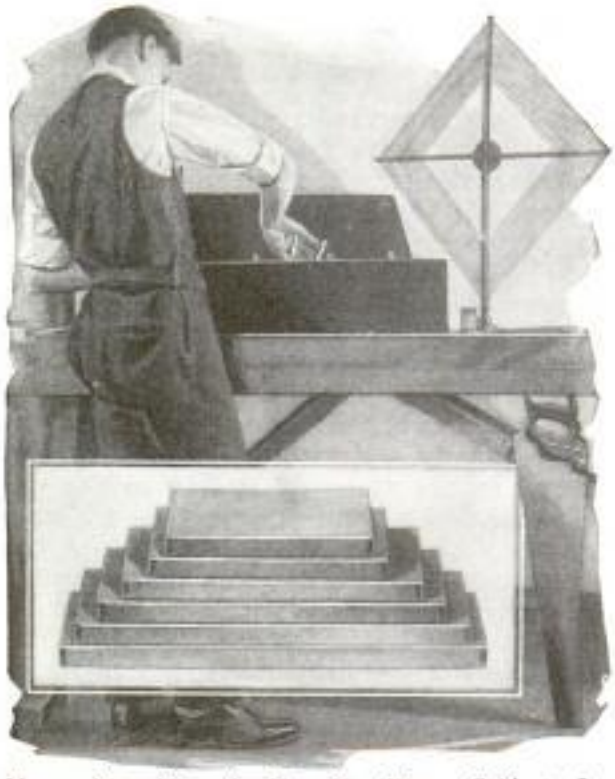

Above, Assembling the New Knockdown Cabinet; Insert, How the Cabinets Are Shipped

from start to finish, attractive cabinets are being put up in knockdown form. Each piece is carefully designed in every detail, and the outfit contains all necessary screws and bolts. A chart is furnished to guide the builder in drilling the set, and a screwdriver is provided to aid in the assembling. The cabinet parts are made of a special moisture-resisting compound which is claimed to eliminate current losses. Either hinged or slide lid can be had.

Spring Post Makes Quick Connections

Simplifying connections in the set wherever they are used, spring binding posts now on the market should make a hit with the radio fan. The posts are made in two styles, plain nickeled brass or with engraved hard-rubber caps, and in each style the method of installing and using is the same. The instrument is placed in position on the board and the post fastened in place,

then the wire is inserted by simply pressing down on the head of the post and slipping the wire into the slot in the side. The slot or the busbar wire can be turned in any desired position, and there is no hole to feel for, just a slot that is easily located no matter where the post may be placed.

Handy Box Aids in Soldering Radio Wiring

A small box of some kind is essential to hold flux, solder, and odds and ends in radio work, and the one shown in the drawing has been found very handy. A heavy tin box is formed, about 8 in. long, 1 in. high and 4 in. wide, and a top flap is bent over to make a 3-in. shelf. At the ends of this shelf are bored two small holes, and one finger piece of each of two common office clips, having about 1-in. jaws, is bolted through each hole. These form the equivalent of two small and

delicate horizontal vises—especially useful for a one-man job. They will be found excellent in the case of small jobs; for example, when soldering and unsoldering lugs, it will not be necessary to chase the lug all over the tin and finally catch it on lopsided, to be soldered again. It is where wanted and easily released. Also, in uniting two wires, soldering pigtails, tinning, or attaching a right-angled connection to a main wire, the clips will be found of value. Two wire supports for the soldering iron, fastened to the edge of the bench, and projecting over the bench, will also be found handy.—Harry W. Poor, Boston, Mass.

Fixing Condenser for Experiments

The fan who likes to tinker with new hookups soon finds that the terminals on variable condensers and similar instruments, are a source of trouble when he wants to make a quick hookup. If some Fahnestock clips are purchased and clamped under the regular terminal nuts, his trouble will be at an end as he can slip wires into or out of them in a moment.

Copyrighted material

Making a Hall-Clock Case

A Striking and Effective Design for the Hall Clock, Intended Especially for Amateur Woodworkers

THE hall or grandfather clock is one of the most beautiful, as well as most useful pieces of furniture that the home owner can have. Clock movements in a variety of designs and at a wide range of prices to suit the pocketbook can be obtained from clock makers, but, the home owner may say, what about the case? Is not the making of a clock case above the capability of the amateur woodworker? It is not. The design shown in the accompanying drawings is intended especially for the average amateur, and, given a little patience and the ability to make neat joints, there is no reason why the home woodworker should not make a case as good as one he can purchase in the store. Mahogany makes the finest hall clock,

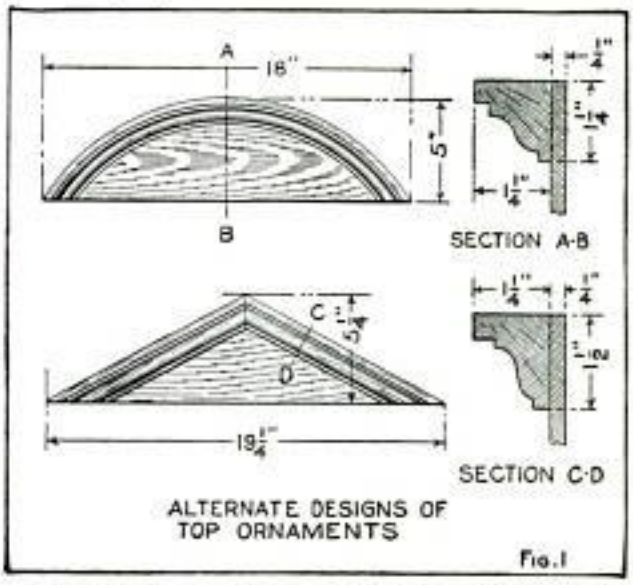

A Simple but Dignified Case for the Hall Clock Designed for the Amateur Craftsman; Above, Alternative Top Designs

but walnut is now being used frequently. The choice of material, of course, will depend on the taste of the maker, and perhaps on the wood used in the other hall furniture. In this article, where "inch" lumber is mentioned, it is understood to mean 1-in. planed on two sides, leaving the stock approximately ⅞ in. thick.

First provide the two sides, No. 1, from inch lumber, 12¼ in. wide and 70 in. long. Slightly round the front edges and rabbet the back edges ¼ in. deep, leaving about ¼ in. at the back edge of the boards. Next make the top and bottom boards, Nos. 2 and 3, from 1-in. poplar. The back, Nos. 4 and 4A, should be made of built-up panel stock, preferably birch, ¼ in. thick

Copyrighted material

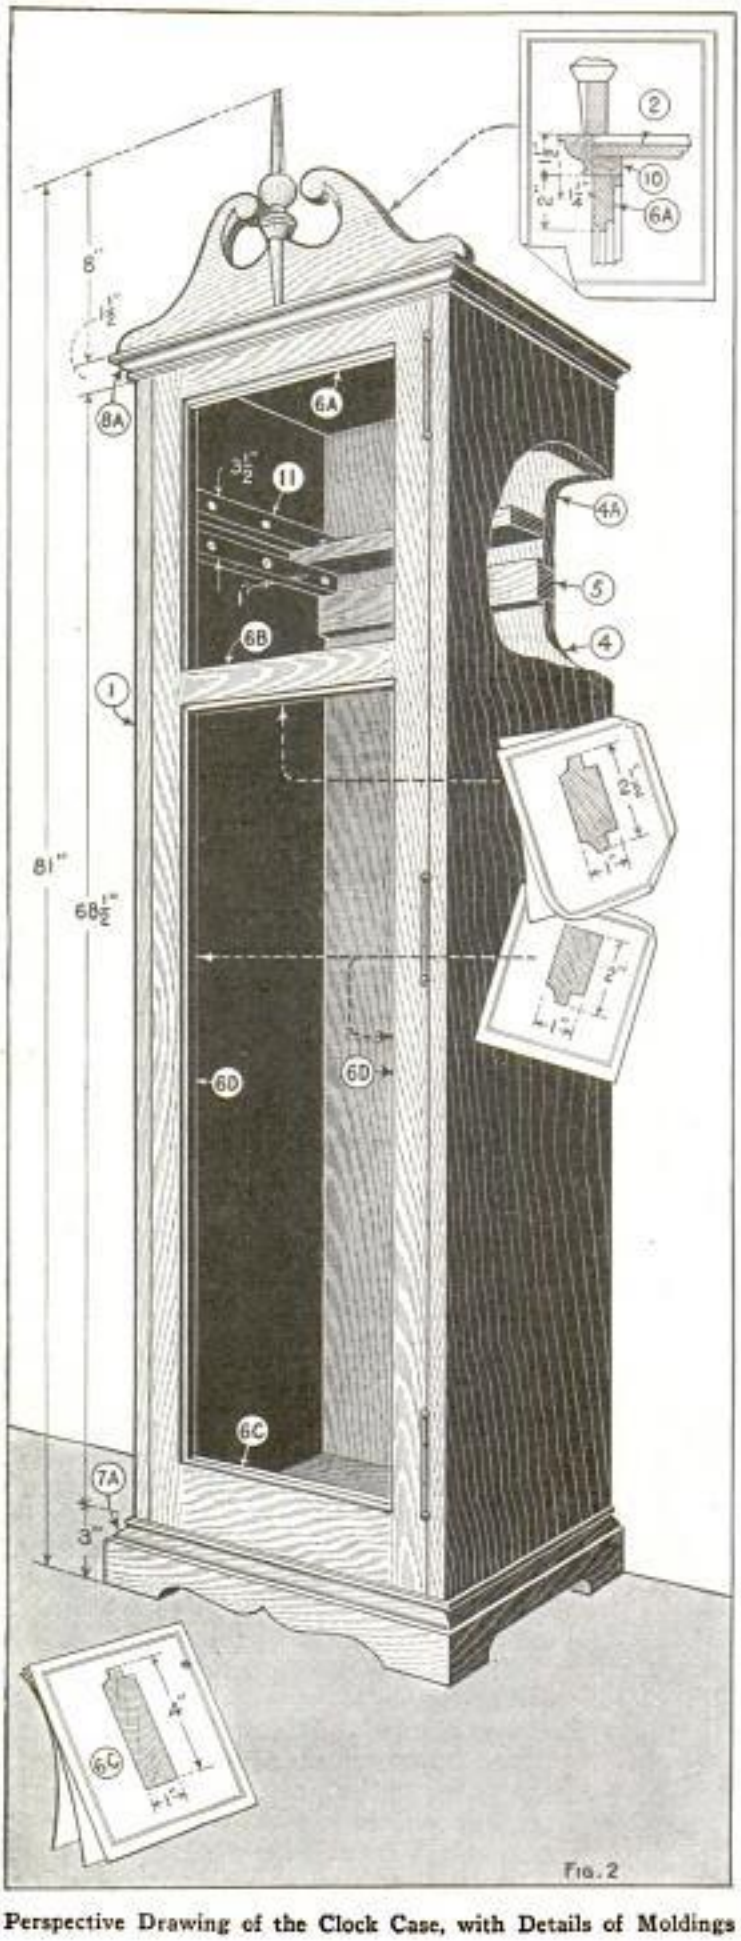

Perspective Drawing of the Clock Case, with Details of Moldings

and 17 in. wide. The length of each of these pieces is determined by the position of the back piece, No. 5, and this, of course, depends on the clock movement used. It should, however, be approximately 12 in. from the top, and be made of poplar, 3 in. wide and 17 in. long, rabbeted on both edges and screwed into place as a brace for the case and an edge support for the two back boards. Both ends should be rabbeted to fit in between the sides of the case.

Next build the door to fit the frame. The side rails, No. 6D, are 2 in. wide and are rabbeted inside, ½ in. wide and ⅜ in. deep, to hold the glass, which is fastened in place with strips approximately ¼ by ¼ in. in dimensions. The center door rail, No. 6B, should be 2½ in. wide, and the lower rail, 6C, 4 in. wide. The front edge, around the glass, may be beveled or curved to add to the appearance of the door.

The lower molding and the sides, Nos. 7 and 7A, respectively, are made of 1-in. stock; the upper edge is molded and the lower edge band-sawed or cut with a turning saw to the shape indicated in the drawings. The upper molding, No. 8A, is 1½ in. high and 1¼ in. thick, and both the top and the bottom moldings are mitered. The door-stop molding, No. 9, is ⅜ by ½ in., around the inside of the door.

The filler strips, No. 10, 1½ in. wide and 1 in. thick, finish off the inside top and bottom of the case, besides providing a sill for the lower door strip. See Fig. 3 for details.

Three alternative designs are shown for the top; the one on the clock case and two in Fig. 1. These may be taken as suggestions, but there is considerable opportunity for original design in making the top.

The bottom view, Fig. 3, shows how the bottom is screwed to the lower edge of the sides; No. 5 wood screws, 1½ in. long, are used for this, and blocks are glued into the four corners to reinforce the lower molding. The top is similarly fastened to the upper ends of the sides, but no corner blocks are required here. The

Copyrighted material

door is hung with three 2 by 2-in. ball-pin hinges, and a mortise lock and a neat escutcheon should be provided for locking the door. The movement supports, No. 11, consist of 1-in. poplar strips, screwed to the sides of the case, and should be 3½ in. wide, grooved through the center of their entire length ½ in. deep and ⅞ in. wide. The movement, when the case is finished, is mounted on a board fitted to slide in the grooves. The slides should not be screwed in position until the movement has been selected and is on hand, as different movements require the slides to be mounted in the case at varying positions. The reason for splitting the back into two parts is to permit ready access to the movement. This may be had by merely removing the upper section of the back, which is held in position by means of two ⅞-in. screws on each of its four edges.

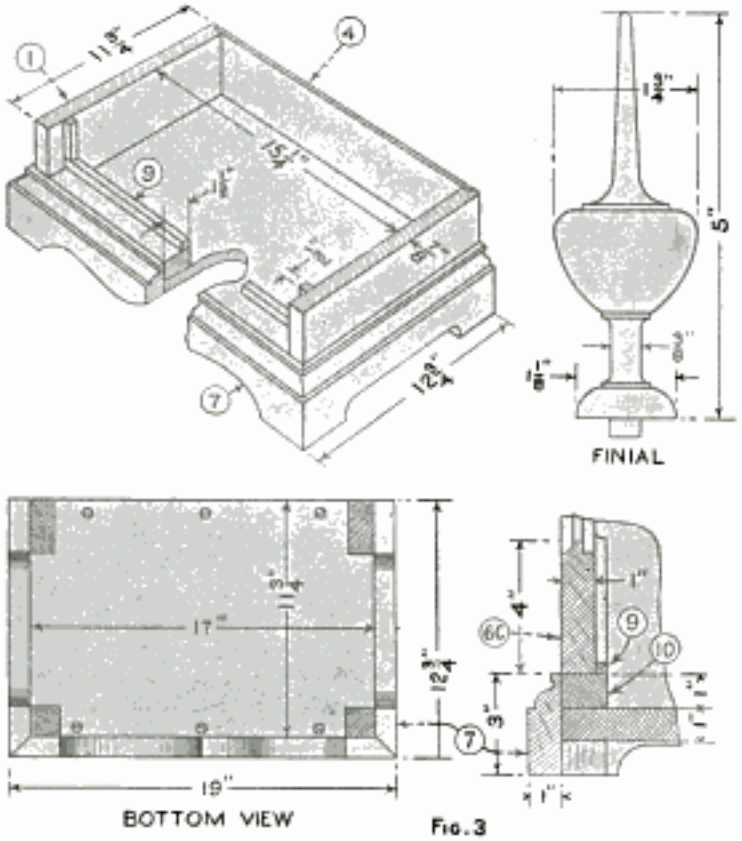

Fig. 3

Details of the Bottom Molding, Finial and Method of Fastening Bottom and Reinforcing Lower Molding

Flypapers and Poisons

Sticky flypapers are of some value for destroying flies in the house, but they have numerous objectionable features. For use out of doors, traps are much more effective and economical.

However, to make a sticky flypaper, take 2 lb. of rosin and a pint of castor oil and heat them together until the mixture has the appearance and consistency of molasses. Take a paintbrush and smear, white hot, on sheets of paper and place several about the room.

A non-poisonous fly killer recommended by the public health service consists of a 1-per-cent solution of sodium salicylate. This is prepared by dissolving three teaspoonfuls of the pure chemical in 1 pt. of water, some brown sugar being added to render it more attractive to the insects. Probably the best poisoned bait for houseflies is formaldehyde and milk, used in the proportion of two teaspoonfuls of formaldehyde to 1 pt. of a mixture composed of equal parts of water and milk. This is placed in flat dishes in places frequented by flies. It should be borne in mind that formaldehyde is poisonous when taken internally. It should not be inhaled, nor should the eyes be exposed to it. Special pains should be taken to guard children from access to poisoned fly baits and to prevent the dead insects from falling into food and drink. The most effective poison for the larvæ of the common housefly is powdered borax.

Mute for Phonograph

When it is desired to reduce the sound volume of a phonograph not equipped with a mechanical control attachment, the improvised rubber mute shown in the illustration will be found effective without giving that "boxed - up" effect that is produced when the doors of the sound chamber are closed. The mute is cut from a 5-cent eraser, split halfway up the center and notched at the other end as shown in the detail. This makes it easy to attach.

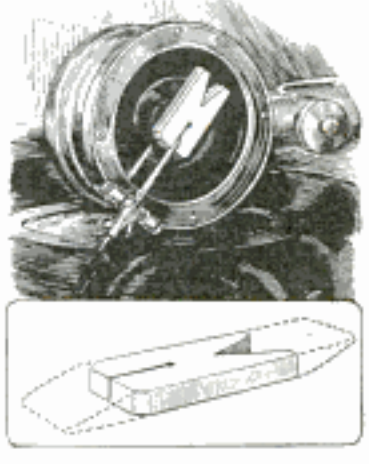

Copyrighted material

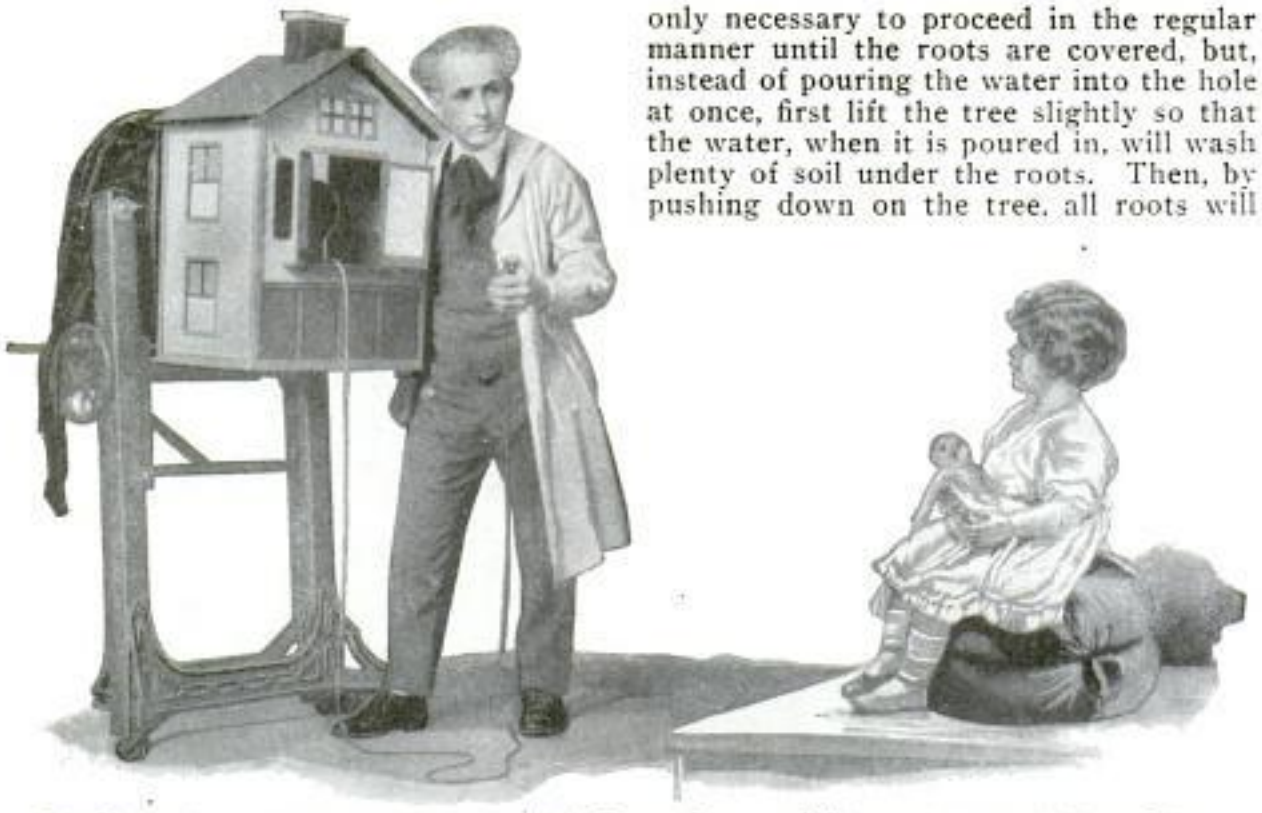

Play House Arranged over Front of Large Studio Camera Interests Children and Results in Better Photos

Getting Better Photos of Children

Children from 3 to 7 years old are, as a rule, difficult to photograph because the big black camera scares them. To avoid this effect, a Cincinnati photographer mounted a toy house over his camera, in order to arouse the child's interest and cause an expression of animation on its face that would make for a pleasing portrait. The idea works like a charm, he says, and children do not mind having their pictures taken. Consequently, the work turned out is of the best, so that the device also has its advertising advantage and is a well-paying investment.—J. R. Schmidt, Cincinnati, Ohio.

Planting Trees

Many fruit and shade trees die every year, in spite of the care they receive, because of a seemingly insignificant neglect at the time of planting. When the roots of the tree are placed within the hole and covered with dirt, a quantity of water is usually poured over them and this causes the soil to settle to such an extent that large open spaces are often formed on the underside of the root branches. As the real feeders of the root system are on the underside of the roots, it goes without saying that those along these cavities will not develop and the tree will consequently be undernourished. To avoid this, it is only necessary to proceed in the regular manner until the roots are covered, but, instead of pouring the water into the hole at once, first lift the tree slightly so that the water, when it is poured in, will wash plenty of soil under the roots. Then, by pushing down on the tree, all roots will be forced into the soil so that they will begin to take up nourishment and develop instantly.—G. E. Hendrickson, Argyle, Wisconsin.

Spout for Large Oilcans Facilitates Pouring

Five-gallon oilcans, such as are commonly used by the car owner to purchase and store oil, are rather unhandy to pour from, especially if the can is full or nearly full, as it is then impossible to hold it close enough to permit a steady stream without spilling. A piece of ⅜-in. copper tubing, about 4 in. long, bent to a 90° angle, as shown, and securely soldered in the regular filler cap of the can, eliminates the trouble. Holes are drilled through the top and bottom of the cap to receive the tubing and the cap is screwed down tight. The tubing is slipped into the hole, and turned until the bent part is parallel with one side of the can, with the cap tight. Mark the spot on the cap, and, after removing it, solder the tubing in place. If a small air vent is

Copyrighted material

punched in the top of the can, opposite the cap opening, the oil can be poured without "gulping."—Richard C. Tarr, Gloucester, Mass.

Farmer's Mail Signal

A Maine farmer, whose home is situated nearly a mile from the highway where the mailbox is located, made a semaphore to enable the mailman to signal the delivery of mail. It consists of two disks attached to a crossarm, which is pivoted at the top of a high pole and connected to a lever at the bottom of the pole to permit changing their position. One of the disks is weighted so that when the lever is not drawn down the crossarm is horizontal. The other disk is about 18 in. in diameter and painted like a target. A length of galvanized-iron wire is attached to the crossarm near this disk and to the lever, which is pivoted on the post. When mail is delivered, the mailman simply pulls down the lever and slips the end under a rope loop to keep it in this position. This pulls the painted disk down and tells the farmer that there is something in the box. A great many trips to the mailbox are eliminated by this device. The arrangement of

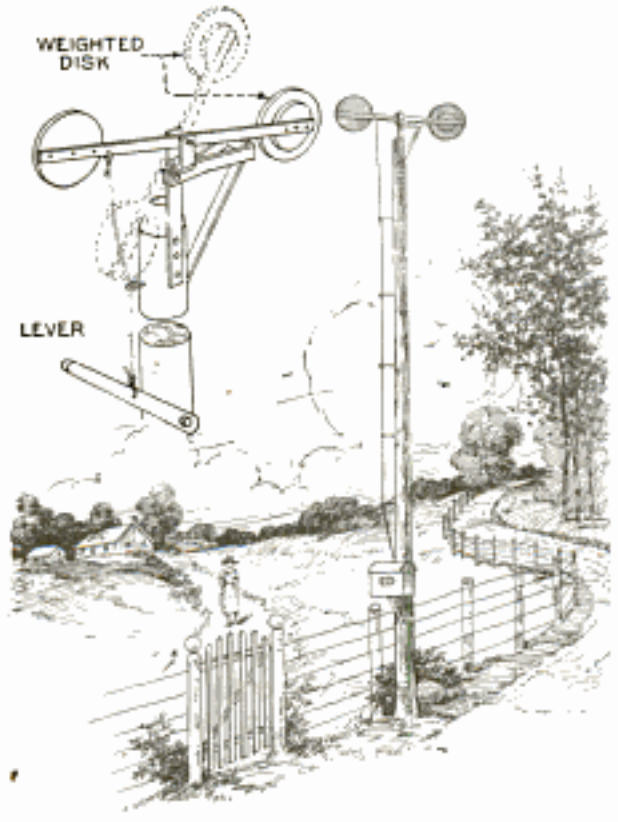

Semaphore near Mailbox Saves Farmer Many Unrewarded Trips

the bracket on which the crossarm pivots is shown in the drawing.—Sam E. Conner, Auburn, Me.

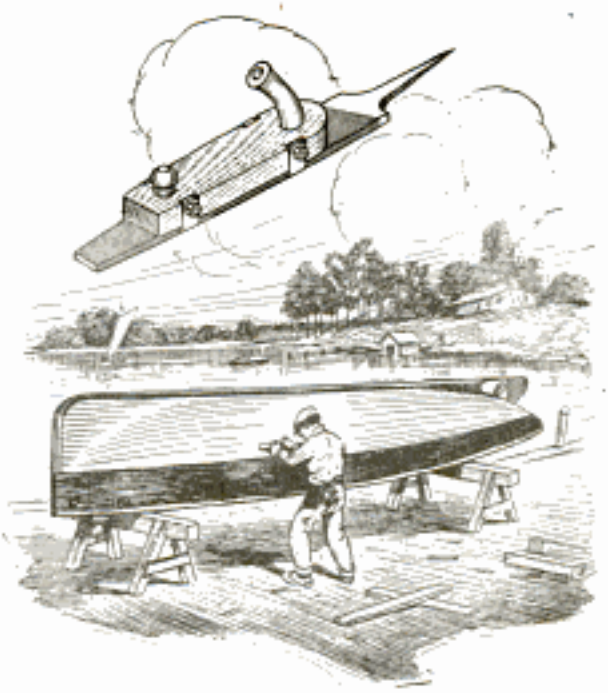

Handy File Plane Used to Smooth Curved Surfaces Such as Boat Hulls and the Like

A File Plane

For smoothing the hulls of boats and for many other similar purposes where the usual method of planing is impossible, a file rigged up like a plane, as shown in the illustration, will be found very satisfactory. The attachment is easy to make as it consists simply of a block with a handle and knob fastened to the top and clamps on the sides, which are tightened with screws. The clamps hold the file securely, but must not project below the lower surface of the file.

Cement for Water Tanks or Aquariums

A reliable cement that adheres to glass, wood, stone or metal, and hardens under water, and is therefore particularly suitable for use in building small water tanks or aquariums can be made by mixing litharge (oxide of lead), plaster of paris, dry white sand, and finely powdered rosin. Take equal parts of the first three ingredients and one-third part of rosin. Mix these well and sift, and keep in a tightly corked bottle until needed. It is then made into a putty by mixing with boiled linseed oil and a little drier. Do not prepare more than is necessary for immediate requirement. It will resist the action of either fresh or salt water. After application, allow the tank to dry for 10 or 12 hours before putting in water. This cement overcomes the greatest difficulty experienced by most persons in trying to make a waterproof aquarium.—Chas. Illingworth, Vancouver, Can.

Copyrighted material

Building a "SCENIC" COASTER

by K. D. Reynolds

"The Race through the Grass" in Full Swing; Below, Bottom View of Car

HERE is the newest thriller of the youngsters' world—the homemade "scenic" coaster. Built in the hills of North Berkeley, Calif., by two boys aged but 15 and 17, it is guaranteed by the kids of the neighborhood to provide more thrills per curve and hump than the most ambitious coaster that can be found in an amusement park.

Richard Leonard and Ysidro Orpano, the "promoters" of the enterprise, selected a vacant lot that slopes abruptly to the shores of San Francisco bay as the site of their coaster, then they started gathering the lumber, consisting mainly of scraps from new houses that were being built near by, and lumber from an old garage torn down in the vicinity. The cost of the necessary nails and the upkeep of the coaster have been provided for by charging the passengers one cent a trip. And what a cent's worth the juvenile passengers get! There are ten gliders or cars on which the riders go flying down the hill, through switches, around curves and over humps where one shoots through the air for a distance of from two to four feet, depending on the weight of the passenger, before alighting again on the rails and speeding onward. Farther on, the rider runs under a trestle over which other gliders are rushing, and now over a level crossing, just missing another car approaching on another track!

There are 960 feet of track in all, and there are several miniature stations along the route that serve as storehouses for the paraffin used to "grease" the slide. The cost of the latter is also taken care of by the income derived from the neighborhood's pennies. When this article was written, the builders had collected over $10, representing more than 1,000 rides.

The track is built of 6-in. boards, with laths nailed down the center to make a guide rail. The passenger rides on a simple sledlike car that has two iron-shod runners at each end, spaced far enough apart to slide easily along the lath. The

Copyrighted material

accompanying drawings and photos will give any boy who wants to emulate the builders a good idea of the construction of the cars and the track, which, of course, can be modified in any desired way to suit the material at hand; it is difficult to see, however, how it could be made much simpler. A little paraffin rubbed on the track and guide rail at the start of the day gives plenty of speed to the ride.

The main thing to be observed in building the track is that if any trestles are used they must be strong enough to support the weight of the heaviest person who is likely to use the coaster. Use the heaviest lumber of that available for the trestles and be sure that it is well braced in every direction. The cars can be provided with wheels if desired: these may be taken from old roller skates and this should provide even more speed than the sled runners. The skates could be used "as is," and the center guide rail on the track replaced by laths nailed at each side, so as to form a groove for the roller-skate wheels to run in, and prevent them from jumping from the track.

Not only the children use the "Race through the Grass," for, on the day when these pictures were taken, one full-grown man, who was at least 40 years of age, went shooting down that slide at about 30 miles an hour, yelling like an Indian every foot of the way, evidently enjoying it immensely. The writer rather envied him.

How to Care for Shoes

The life of shoes may be considerably prolonged by the exercise of a little care. It is a curious fact that if a wet shoe is placed close to a fire, the interior of the sole is sometimes completely ruined before the surface of the leather shows any appreciable signs of injury. The temperature of a steam radiator is also sufficient to injure a wet shoe sole. Shoes should be dried slowly, and, if possible, shoe trees should be inserted in them to prevent them losing their shape and becoming uncomfortable. It is therefore a matter of economy to keep two or more pairs of shoes and wear them in rotation. Some leather manufacturers claim that two pairs of shoes worn alternately will outlast three pairs worn consecutively.

Shoes, when not in use, should be stored where there is circulation of air. Perspiration is bad for leather, and shoes wet in this manner should be dried as soon as possible.

Details of the Construction of the Track and Drawing Showing Underside of Car or Sled; Above, the Car at the Top of the Hill, Ready for the Dash down the Slide

Copyrighted material

Mowing Lawn Banks

With the aid of an additional handle on the lawnmower, the difficulty of cutting grass on banks is considerably reduced

Additional Handle on Lawnmower Reduces Difficulty of Cutting Banks

as it permits the worker to remain on top of the lawn yet hold the mower at the proper angle. The extra handle, about 8 ft. long, is screwed to the underside of the regular handle, and a brace is nailed between the two, as shown. The length of this brace depends on the slope of the bank: the steeper the bank the longer it will have to be in order to hold the mower at the correct cutting angle. When cutting the flat part of the lawn, the extra handle and the brace are removed.—Sam E. Connor, Auburn, Me.

Removing Rubber Tissue from Garments

When rubber tissue has been employed in the temporary repair of a garment, one often finds that it is almost impossible to remove it so that permanent repair work can be done with needle and thread. However, by sponging the spot with a cloth moistened with gasoline, the tissue will be dissolved so that it can be removed entirely without damage to the fabric. For the same reason, repairs cannot be made with rubber tissue immediately after a garment has been cleaned with gasoline. Even though it appears to be perfectly dry, the article should be aired for a day or so, or sufficient fumes of the gasoline will remain within the fibers to resist the attachment of the tissue.—G. E. Hendrickson, Argyle, Wis.

Chasing Flies with a Fan

By using the electric fan the fly swatter can be done away with and the house cleared of flies with very little work.

Raise a window halfway up, and draw the shade on it halfway down. Draw the shades on all the other windows down completely, thus allowing the light to come in only through the open window. Place the fan on a table or chair a few feet away from the window, facing it, and start the fan so that the draft will blow out of the window. The flies make for the light, and as soon as they come into the current of air from the fan they "hit the breeze" out of doors.—W. C. Martin, Cleveland, Ohio.

Diffusing Screen for Enlarging Lantern

A diffusing screen for an enlarging lantern is expensive and cannot be obtained everywhere. A good substitute can easily be made in the following way: Take an unexposed sheet of film from a film pack, and place it in the hypo solution without exposing it to light. After leaving it in this bath for about twenty minutes, remove and wash it like any other film. After drying, it will be found to make a satisfactory diffusing screen.—W. J. Latter, Halifax, N. S.

A Hoist for Filled Sacks

One man with the hoist illustrated can lift more sacks of wheat or other grain into the mow of a barn faster and with less exertion than several carrying the bags on their shoulders. A pivoted post is set up vertically at the proper position inside the mow door; a horizontal arm is attached to it by a single bolt and is kept in position by means of a ½-in. iron rod that is fixed to eyebolts in one of the studs at the side of the door and in the end of the arm. When the lifting rope passes up and the ring comes against the pulley, the arm will be forced down at the opposite end. It

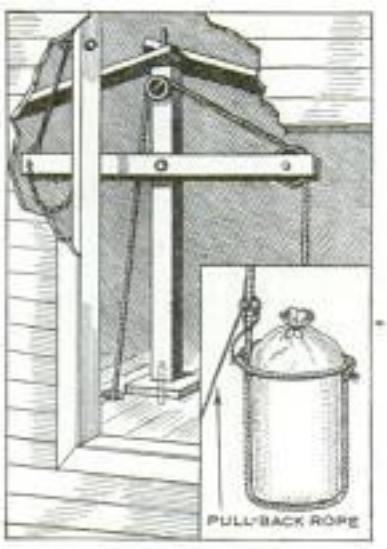

Copyrighted material

should be noted that the distance between the inner end of the arm is three feet or more from the studding, and, as the iron rod is attached to both, then, when the arm is forced down, it is also caused to swing toward the studding so that the sack of grain will be swung inside. The loop which holds the sack in place during the hoisting operation is made sufficiently large to be easily passed over the top of the sack; it holds the sack so, that though it may be securely tied when filled, there is little danger of its coming open. When the sack has reached its position in the loft, the pull-back rope is pulled by the man on the wagon below and the loop is lifted from the top of the sack so that it rolls free. The lifting rope and arm are returned to position for another sack as the pull-back rope is operated.

Effective Hawk Trap

When a hawk flies down over a chicken yard, the chickens scuttle for shelter, and the hawk usually alights on some near-by post from which to make its final pounce on the victim. Taking advantage of this,

Effective Method of Trapping Hawks in Farm Yard

a Minnesota farmer mounted a spring trap on each of three posts in his yard, as shown in the illustration, and found this method much more effective than trying to shoot the hawks. Sheet-metal flanges were tacked around the posts to prevent cats and squirrels from climbing up.—A. C. Brundage, Rochester, Minn.

Window Weights Lashed to the Bottom Rail of the Walker Make It Safer for the Baby

Making the Baby Walker Safe

With the ordinary kind of baby walker it sometimes happens that the child reaches over the top rail and falls, which is especially liable to happen when the walker is used outdoors on uneven ground. The trouble can, however, easily be prevented by tying two window weights to the lower rail, over the rear casters. This is a job that can easily be done in a few moments and will save the mother a great deal of worry.—Mrs. V. S. Martin, Detroit, Michigan.

Cleaning Paintbrushes

By using the following method paintbrushes can readily be cleaned and kept soft and pliable without keeping them in oil or water. When finished with the brush, clean it in gasoline; about two-thirds of a cupful is enough. Pour some clean gasoline on the brush and hold it in front of the nozzle of a garden hose or other strong stream of water, turning the brush around several times to wash out the gasoline. With the removal of the gas, every trace of the paint will also disappear. The brush is then laid away to dry, and it will be soft and clean for the next job. Even if used in black paint a brush will not soil a clean piece of paper when rubbed over it, after having been thoroughly cleaned and dried in this way. —Orin C. Watkins, Salem, Oreg.

Copyrighted material

Tools for the Home Mechanic

by J. Jate

THE man who likes to fuss with tools around the home—and what home owner doesn't?—is a rare and fortunate mortal if he has not discovered, to his exasperation, when halfway through a job, that some essential tool is not among his kit. Few of us tinkerers have all the tools we'd like to own, and no doubt many of those we'd like to buy would only be of use to us once in ten years, but how many men, when planning a house, or selecting the fixtures and furniture for it, spare a thought to the tools necessary for their upkeep? We take care that Mrs. Amateur Mechanic has all the tools she needs in her kitchen (if we don't, she does, so it amounts to the same thing), but what about the time when the handle will fall off the coffeepot? When the "missus" wants a few shelves knocked up in the closet? When the new storm door won't fit, or when the toaster cord breaks? Then, will we be able to go to the tool chest or workbench and dig up the screwdriver, saw, plane or pliers we need, or must we run out and try to buy them? Of course, this is not addressed to the man who says, "Oh, we'll get a carpenter" (or a plumber or an electrician, as the case may be). It is directed to Mr. Amateur Mechanic; to the man who gets more fun out of twenty dollars' worth of time spent in tinkering with tools than in paying out five to have the job done. Not that the ratio is always like that, far from it, but all Amateur Mechanics will agree that it's sometimes that way.

The list of tools to be included in the equipment for the home must, of course, be selected finally by the individual. The list given herewith may be too small for some; may contain too many tools for others; perhaps has not enough woodworking tools for some; not enough metal-working tools for some one else. It represents the average, however; and the man who has this kit, will find that it will take care of most of the jobs that are within his ability. The case of the man who wishes to work only in wood, or in metal, or has some other hobby, will be taken up in other articles; this one merely considers the requirements of the home worker.

Type of Manual-Training Bench That Will Be Found Useful to the Home Mechanic; Note the Backboard for Tools

First in importance is the workbench, and it should be urged on all prospective home mechanics that the workshop be built around this. No serious work can be done without one. It need not be an elaborate affair—all drawers and compartments—in fact, the writer must confess to rather a prejudice against drawers and doors in a bench where woodworking

Copyrighted material

is done. It always seems to happen that, when one has a wide and heavy door clamped in the vise, one discovers a tool essential for the job is in one of the drawers behind the work! However, where space is at a premium, a few drawers help considerably. The construction of the bench is rather outside the scope of this article, and will be treated next month, but if the reader wishes to purchase his bench rather than make it, he will do well to purchase one of the sturdy little benches made for manual training. These are well made, with side and tail vises, and will serve for any job the amateur is likely to run against.

The tools, which are selected from the equipment of Popular Mechanics Model Workshop, are listed below.

This is not a "complete" set of tools. There is no such thing. Nor is it the minimum that a good amateur craftsman requires; it is to be regarded merely as a list from which to select or at which to aim. For example, the ripsaw may be omitted, as most odd-job work consists of cross cutting; the smooth or the jack plane may be omitted, as, on small jobs, a 6 or 8-in. block plane will serve very well; the gimlet, the 1-in. chisel and gouge; the 6-ft. rule; the 6-in. screwdriver; the reamer and countersink; the scraper; the 10-in. monkey wrench and pipe wrench; the long-nose pliers; the flat bastard and half-round smooth files; the blowtorch and anvil may all be omitted, and the tool kit still be satisfactory for its purpose. Nevertheless, there is not a tool in the whole list that would not at one time or another serve better than a substitute, and for this reason we recommend that, if it is at all possible, the whole outfit be purchased. It will then be an emergency indeed that will find the tool chest wanting.

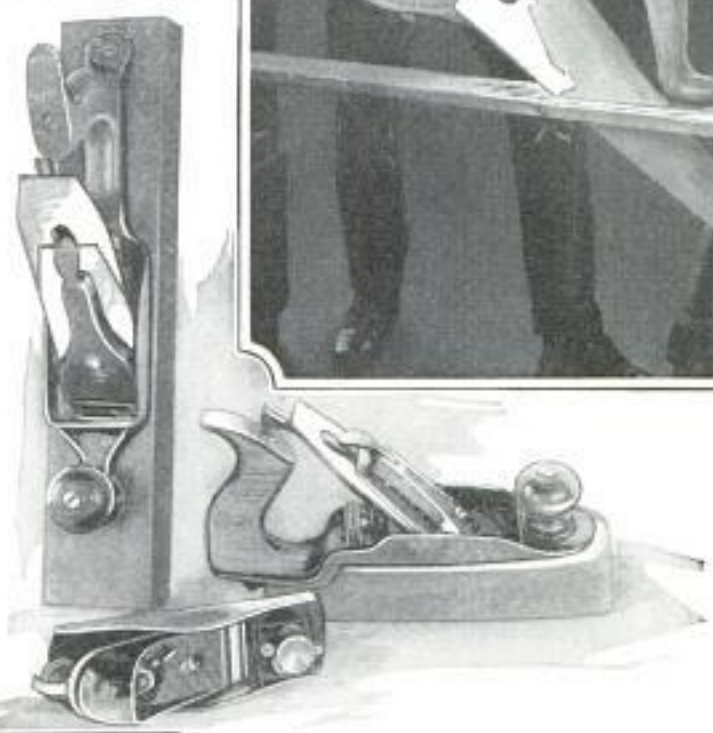

Above, Use of the Ripsaw; Center, Jack, Smooth and Block Planes; Below, Using the Crosscut Saw

Crosscut saw; 26 in.; 8 points.
Ripsaw; 26 in.; 5 points.
Nest of saws, containing compass saw, keyhole saw and nail-cutting saw, with handle.
Jack plane, iron; or iron with wood bottom.
Smooth plane, iron; or iron with wood bottom.
Block plane, iron.
Butt or pocket chisels, ¾ in., ½ in. and 1 in.
Firmer gouges, ½ in. and 1 in.
Auger bits, Irwin pattern; ⅜, ½, ⅝, ¾ and 1 in.
Expansive bit, ⅞ to 3 in.
Brace, 8 or 10-in. sweep, with ratchet.
Gimlet, wooden handle.
Push drill.
Nail hammer with bell face.
Riveting hammer.

any manufacturer

Copyrighted material

Isodell. Pratt Co Greenfield Mass.

Mallet.
Ball-peen hammer, 13 oz.
Nail set, 1-16-in., cup face.
Try-square, 6-in.
Rules, 2-ft. folding; 6-ft. zigzag.
Screwdrivers, 4, 6 and 8-in.
Oilstone, soft Arkansas or Washita.
Oilcan.
Taper reamer.
Rose countersink for wood.
Cabinet scraper, 4-in.
Cabinet rasp, 10-in. half-round.
Hand drill.
Metal twist drills, 1-16 to ¼ in., also ⅜ in.
Hacksaw frame, 10-in.
Hacksaw blades, three, 10-in.
Cold chisels, ¼ and ⅝ in.
Monkey wrenches, 6 and 10-in.
Pipe wrenches, 6 and 10-in.
Pliers, slip-joint, 6-in.
Pliers, heavy cutting, 7-in.
Pliers, small long-nose.
Files, 6-in. saw; 10-in. flat bastard; 10-in. half-round bastard; 10-in. half-round smooth; 8-in. round; 6-in. knife.
File handles, 3 large; 3 small.
Soldering iron, plain or electric.
Blowtorch.
Centerpunch.
C-clamps, 6-in., two.
Putty knife.
Trowel, masons', 6 or 8-in.
Glass cutter and straightedge.
Small bench vise.
Small bench anvil.
Tool grinder, hand-driven.
Small wrecking bar.
Mouse.
Solder and flux, or acid-core and rosin-core solder.

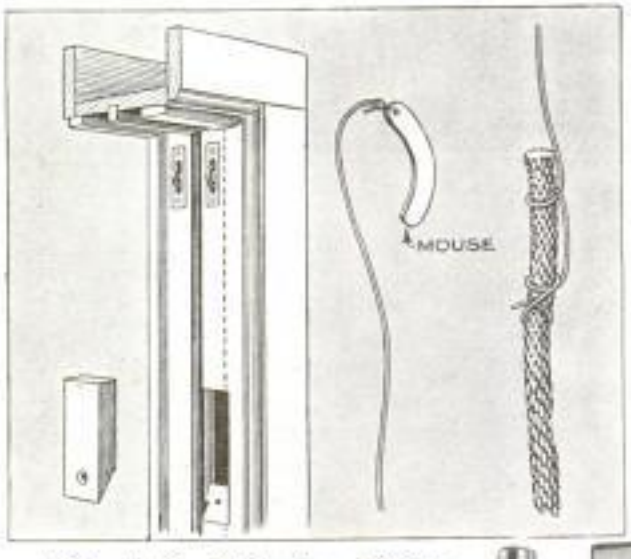

"Mouse" for Rethreading Window-Sash Cord, and Method of Tying Mouse Cord to Sash Cord

A cheap tool is "a snare and a delusion," while a good tool, on the other hand, is "a joy forever"—or thereabouts. This is especially true of woodworking tools. Buy only those that bear the stamp of a reputable maker, and you won't have to spend time that should be used in productive work in trying to make and keep poor tools sharp and in good condition.

Little need be said about the use of the crosscut and ripsaws; their names are an indication of their purpose. The nest of saws, however, deserves a word. This consists of three blades, a compass, keyhole and another blade, which should be tempered to cut nails. All three blades are exceedingly useful, but only the man who has ruined a good saw when cutting through a partition or plaster will appreciate the third.

The jack plane, which should be about 15 in. long, with a 2¼-in. cutter, is used to bring the surface of work to a fairly true plane, and to give it the first "smoothing." The smooth plane is shorter, and, as its name implies, it brings the surface to a finer finish, as it cuts in the hollows that the longer jack plane does not touch. The block plane has its blade set at a smaller angle than either, and is very useful for cutting across the end of the grain.

There are three types of chisels, butt, pocket and firmer; each of these is divided into straight-edge and beveled-edge, and into tang and socket chisels. The tang chisels have a tang or shank that is driven into a hole in the end of the handle; the socket-chisel handles fit down into a tapered socket on the chisels, and this is the preferable construction for the amateur. Whether to get beveled or straight-edge chisels is a matter of individual choice; I prefer the beveled-edge chisel, but that is partly because I do not like to strike a chisel with a mallet, other than a regular mortise

Left, a Small Vise Is a Convenient Tool; Center, Push Drill and Nest of Saws; Right, Socket Firmer Chisels, Showing How the Handles Fit

Copyrighted material

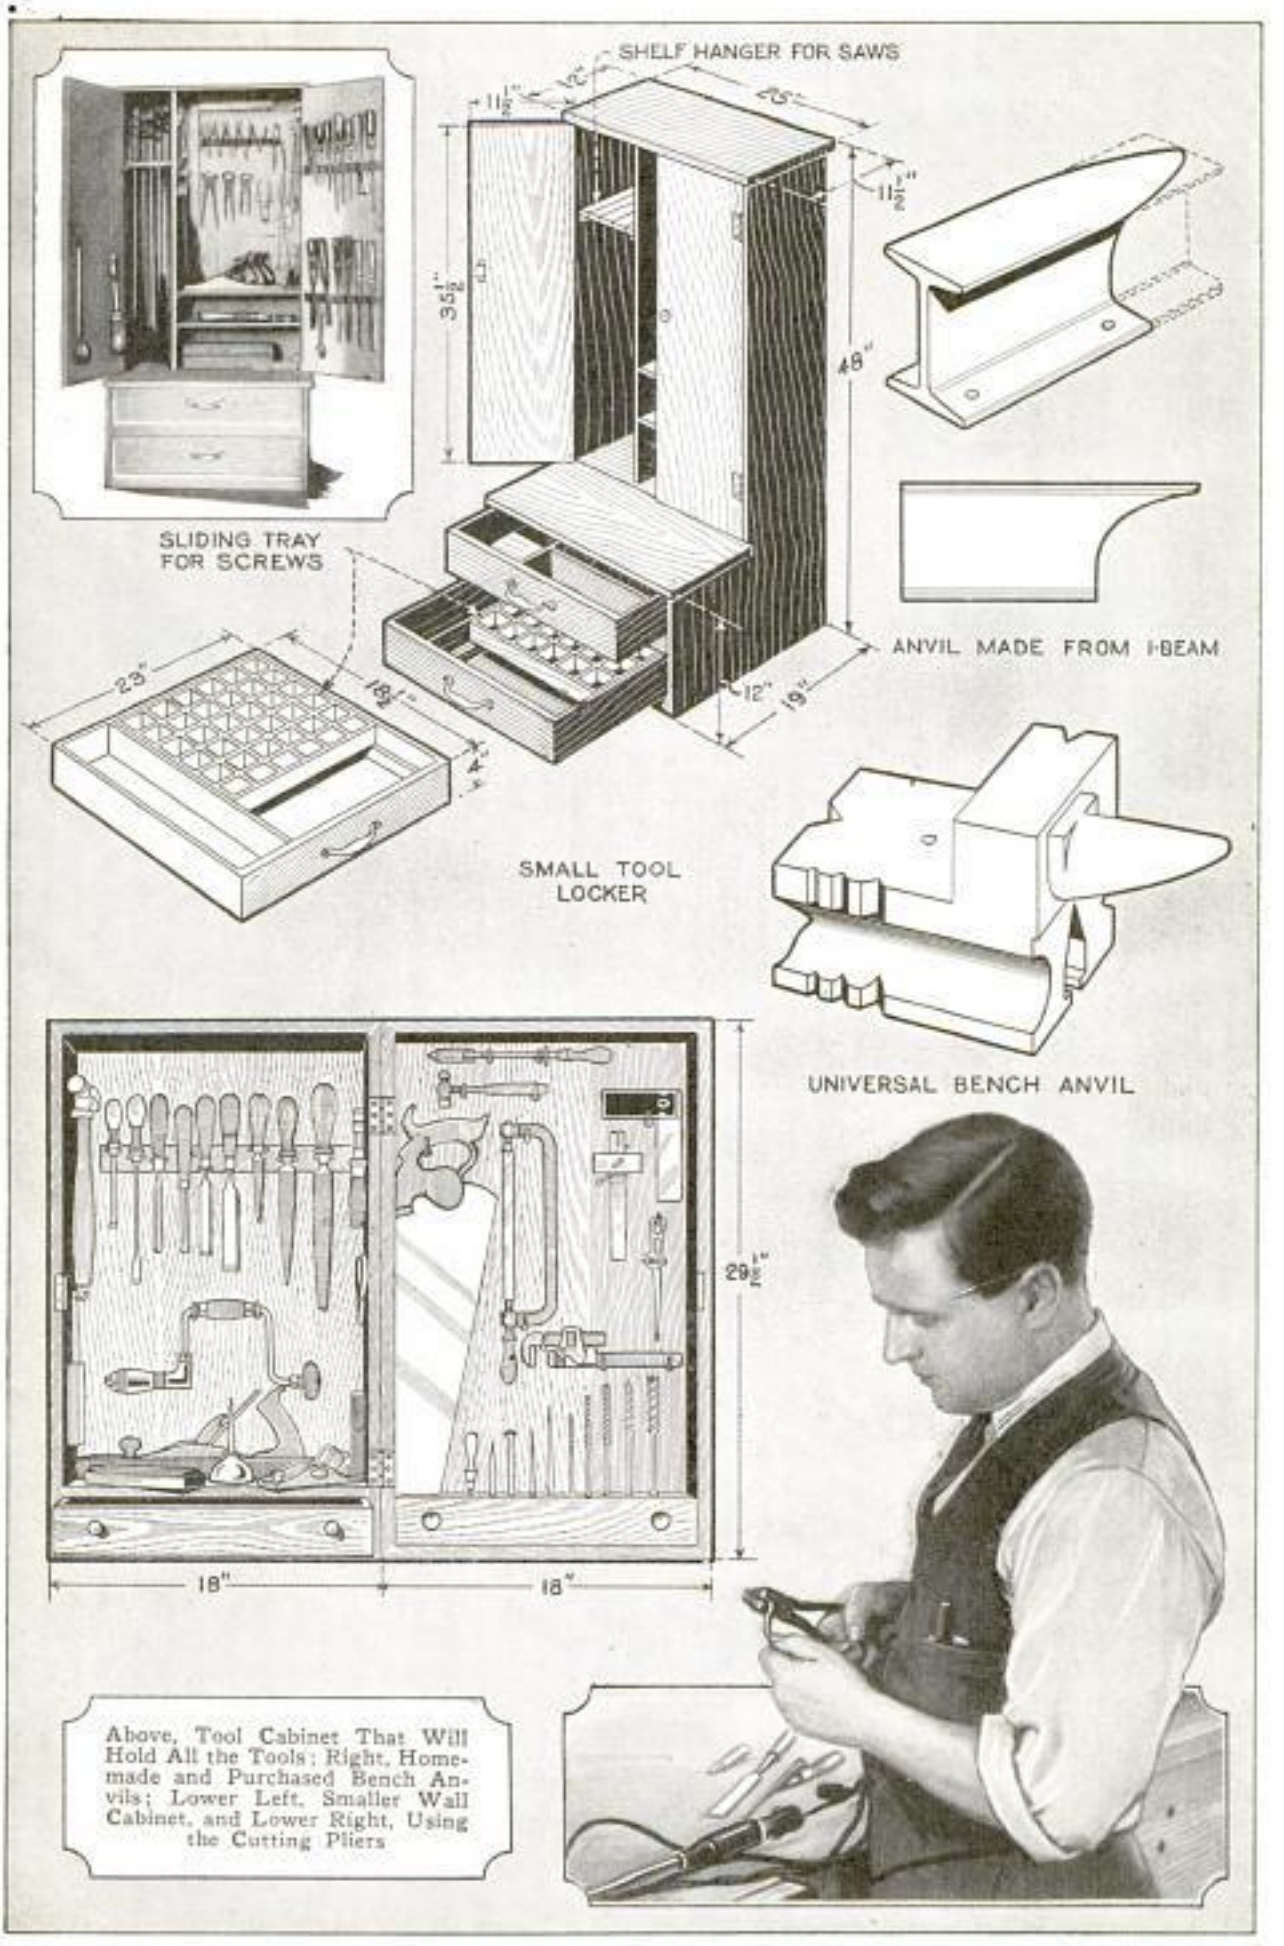

Above, Tool Cabinet That Will Hold All the Tools; Right, Home-made and Purchased Bench Anvils; Lower Left, Smaller Wall Cabinet, and Lower Right, Using the Cutting Pliers

Copyrighted material

chisel, preferring to use it as a paring tool. However, it is convenient on occasion to use a mallet—never a hammer—on a chisel or gouge, and for that reason the socket chisels are recommended.

The remaining tools need little or no description. The oilstone, it will be noted, may either be Arkansas or Washita. There are two grades of Arkansas stones, the hard and the soft. The former is especially adapted to sharpening highly tempered tools, requiring very keen, smooth edges, and pointed tools such as are used by engravers, die sinkers, etc. The soft Arkansas stone is better adapted to the home mechanic, as he uses it only for chisels, plane irons, etc. The Washita stone, of which the best grade is the "Lily White," is also an excellent one for the home worker, and is generally used by carpenters and joiners. It is capable of cutting rapidly and of leaving a smooth, lasting edge. Another good stone is the India, and "slips" of India stone can be had in a number of shapes, for sharpening gouges and special plane bits.

The bench anvil may be any heavy iron, steel or cast-iron block that will serve the amateur mechanic to "pound" on. Pieces of iron bar or heavy wire very often have to be straightened, and, in the absence of anything else, the temptation is strong to use the light vise. Don't do it! There are nice bench anvils to be bought, but this is not necessary; an 8 or 10-in. length of 6-in. I-beam makes a splendid anvil, and one flange can be cut away to make a horn if desired. A good heavy piece of flat steel will serve if nothing else is available, and will save breaking a corner off the stove, or chipping up the door step, when a length of ½-in. iron bar must be straightened. The last item on the list may puzzle some; this little "rodent" is a common carpenter's tool, however, and is very useful to the home mechanic when he has to replace a broken sash cord. It is nothing more than a curved strip of lead, about 3 in. long and ⅜ in. wide, with a small hole in one end to which is attached a piece of twine long enough to reach from the top to the bottom of the window. The free end of the string is attached to the end of the new sash cord, and the "mouse" is passed over the pulley and allowed to fall inside the box. It is then brought out through the pocket and the sash cord drawn after it. The weight is then fastened to the cord.

Boring a Large Hole in a Board with the Expansion Bit and Brace

The manner of storing tools is again a matter of choice. I am, in this case, looking at the matter from the point of view of the house dweller. The inhabitant of a flat has only Hobson's choice—lock 'em up. The home owner, however, usually can find some space that he can call his workshop, and he can either have all his tools in plain sight or keep them in a locker as he chooses. I prefer the former method. A board, about 12 in. wide, and as long as the bench—or as long as necessary—is attached to the back of the bench, or to the wall behind the bench, and the tools are fastened to this with spring clips so that they can be "grabbed" instantly. Holders that will accommodate almost any tool handle can be obtained from tool-supply houses, and brass L-hooks will hold the remainder. The saws are hung on hooks at the right-hand end of the bench, and the planes are laid on edge on a 6-in. shelf above the backboard. A large number of tools can be accommodated in this way. When the tools are in place, take a pencil and run it around each tool, making an outline of the tools, in their proper places on the board, then fill in the outlines with black paint. The silhouettes tell instantly where each tool belongs, and actually help in keeping the bench tidy. It has been the experience of a number of home mechanics, the writer included, that this system is not only preferable to the locker, in point of handiness, but also discourages borrowing. There is no more fear of tools rusting when exposed in this way than when closed in drawers or in a locker. The bright parts of the tools should be wiped occasionally with a cloth saturated and wrung out in good light machine oil,

Copyrighted material

Above, Using the Jack Plane; Center, the Smooth Plane in Action; Below, a Sawhorse Kit That Will Take the Bench to the Job

in either case. Don't use linseed oil; it will oxidize the steel.

For those who prefer the locker, two styles are shown in the accompanying illustrations. One is a large one, and will hold all the tools listed, with room to spare. It is made almost entirely of 1 by 12-in. finished lumber, and is divided into two sections. The cabinet section provides space for the larger tools and the drawer section contains nails, small tools, screws, etc. The details of the cabinet may, of course, be varied to suit the taste of the builder. The other is intended to be used in a flat, or where the full list of tools is not desired. Another scheme that was used by a reader of this magazine is shown in the drawing of the combination sawhorse and tool container. No description of this is necessary; it will not hold a great number of tools, but it forms a very convenient method of taking the bench to the job, as a small vise can be clamped to the top of the horse and many small jobs done right at the spot, instead of running back and forth to the workshop or bench.

Succeeding articles, to appear from time to time, will tell how to sharpen and care for the tools, as well as how to use them. Plan for the tool equipment of your home as you would for the remainder of it. Good tools are an investment that will return the home owner dividends in many hours of enjoyment, and, as he grows expert, in money saved by doing jobs himself.

Homemade Furniture Polish

A homemade furniture polish, which is cheap enough to permit its use on floors and woodwork, can be made from equal parts of benzine and rubbing oil, mixed thoroughly. This polish will not gum and will add considerable luster to the finest wood. About eight times as much of the polish can be made for the price ordinarily asked for a single bottle of prepared polish.

Copyrighted material

Novel Method of Teaching Geography by Means of a Round Concrete Pool, in Which Slabs of Stone Represent Land, and Water Represents Oceans

Realistic Method of Studying Geography

School children of Aviles, Spain, are taught geography and trade routes by means of maps of the two hemispheres laid out in two circular concrete pools, the continents and islands being represented by slabs of stone cut to resemble them, and the rest of the space being filled with water to represent the oceans. The two pools are connected by an opening in the wall and practically every island and country in the world may be found in this "atlas." The photo shows a Spanish boy explaining what route he would take from Aviles to St. Augustine, Fla.—Hamilton M. Wright, New York City.

Patching Auto Tops

The application of a patch to a torn auto top without removing the covering from the frame is often a failure, as it is difficult to apply pressure evenly over the surface of the patch while the cement is drying. A novel method of overcoming this is practiced by a Wisconsin motorist. After the patch has been cemented and applied, a small muslin bag, filled with sand, is placed over it, and the car is left standing in the sun until the cement is dry. The bag of sand accommodates itself to the curved surface of the top with the result that the patch will adhere along all the edges.—G. E. Hendrickson, Argyle, Wis.

Homemade Adjustable Floodlight

Amateur photographers will find a portable floodlight useful for interior work. The one shown in the photo is easy to make and the dimensions may be varied to suit the user. For portrait work, it should be constructed so that it can be raised seven or eight feet above the floor and lowered to within three or four feet of it. The standard consists of three lengths of ⅞-in. wood, about 2 in. wide, and should be of material that will not warp easily. A clamp, with a wing bolt attached, is provided at the upper end and a slide at the lower end as shown. These pieces are made of galvanized sheet iron, a hole being drilled through one side and a nut soldered over the hole to take the wing bolt. A piece of the same metal is screwed to the wood to prevent the bolt from wearing a hole in the wood when it is tightened. The clamp is screwed to the outside pieces of the standard while the slide is screwed to the center piece. Obviously, these pieces should be planed smooth and soap rubbed on to prevent binding. Three legs are screwed to the

Copyrighted material

lower end of the standard and the lamp reflector is attached to the upper end of the center piece. The reflector consists of a square tin box with one side cut out; an empty 1-gal. varnish can will do nicely. The sharp edges are bent over to prevent cutting one's hands. For ordinary work a 500-watt lamp has been found most suitable. A lamp of the kind used in some stereopticon lanterns will occupy little space. It is screwed into a cleat receptacle, which is bolted to the bottom of the reflector with machine screws, and a convenient length of lampcord with a plug attached, is connected to it. Where the lampcord passes through the bottom of the reflector a porcelain tube or a short length of electrician's loom should be used to prevent it from being cut or worn at this point, which would result in a short circuit.—W. E. Burton, Kenmore, Ohio.

Handy Compartment behind Dashboard Useful to Autoist

A handy compartment behind the dashboard of any automobile, whether open or closed, can be made in a short time and will be found very useful. With a keysaw, cut an opening, about 4 by 6 in. in dimensions, in the board and keep the piece cut out. Make a small wooden box to fit behind this opening, using ¼-in. hardwood and screwing it together securely. The edges of the hole are filed smooth and also the edges of the sawed-out portion, which is hinged so that it will swing upward when opened. A knob and catch at the bottom will keep it closed. If the work is done carefully, the finished job will be neat, and will afford a convenient

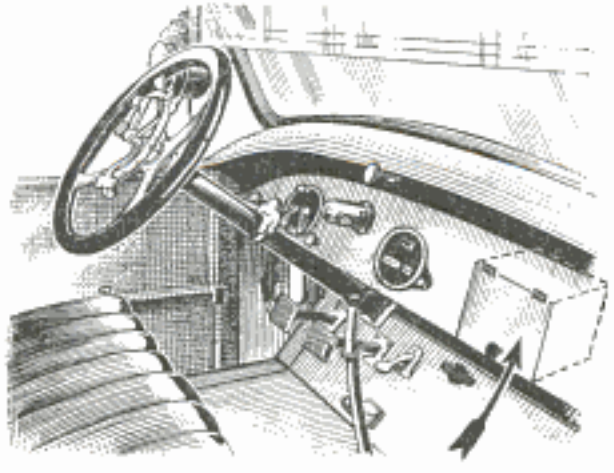

Compartment Built behind Dashboard Is Handy for Storing Trouble Lamp and Tools

place for the trouble lamp, oilcan, pliers and other small tools.—Grover Brinkman, Okawville, Ill.

Crosspiece on End of Ladder Aids in House Painting

When painting the side of a building, it is sometimes rather difficult to get near

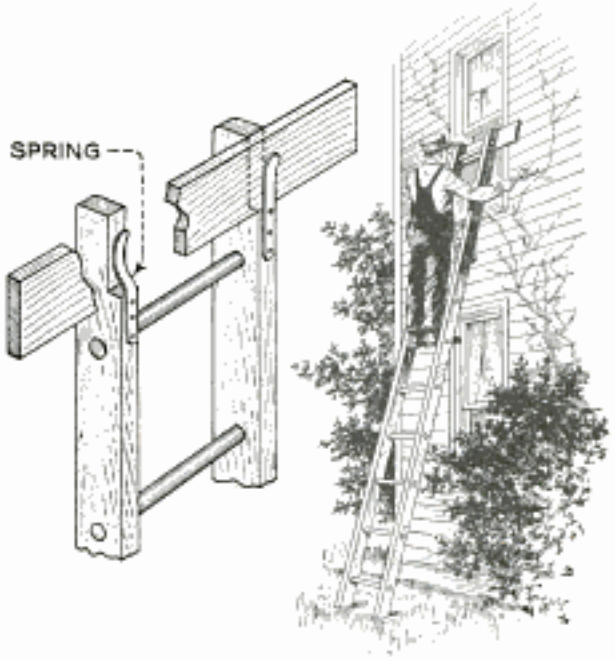

Crosspiece on End of Ladder Helps to Set It across Windows When Painting

the windows, because the ladder cannot be rested against them but must be moved from one side to the other, or one must lean across the window, which is awkward if not dangerous. A crosspiece of 1-in. wood on the end will overcome this trouble. The method of attaching it to the end of the ladder is clearly shown in the drawing. Notches are sawed out of the legs, as shown, and short pieces of spring metal nailed on to hold the crosspiece securely. This arrangement permits using the crosspiece or not, as desired, and is better than nailing it to the ladder.—J. J. Alpine, South Amboy, N. J.

Soldering Flux for Iron and Steel

Iron and steel can be soldered provided a flux for this purpose is used. Some iron and steel fluxes cause considerable rust, but the following flux has been found to eliminate this trouble. In 1 pt. of muriatic acid, dissolve as much sheet zinc as it will absorb; then strain off the acid and put in as much concentrated ammonia as will turn the solution to a milky white. Shake this well and put in 1 oz. of sal ammoniac, ½ dr. of spirits of turpentine and 3 dr. of alcohol. Shake the whole well and keep it in a tightly corked glass bottle when not in use.

Copyrighted material

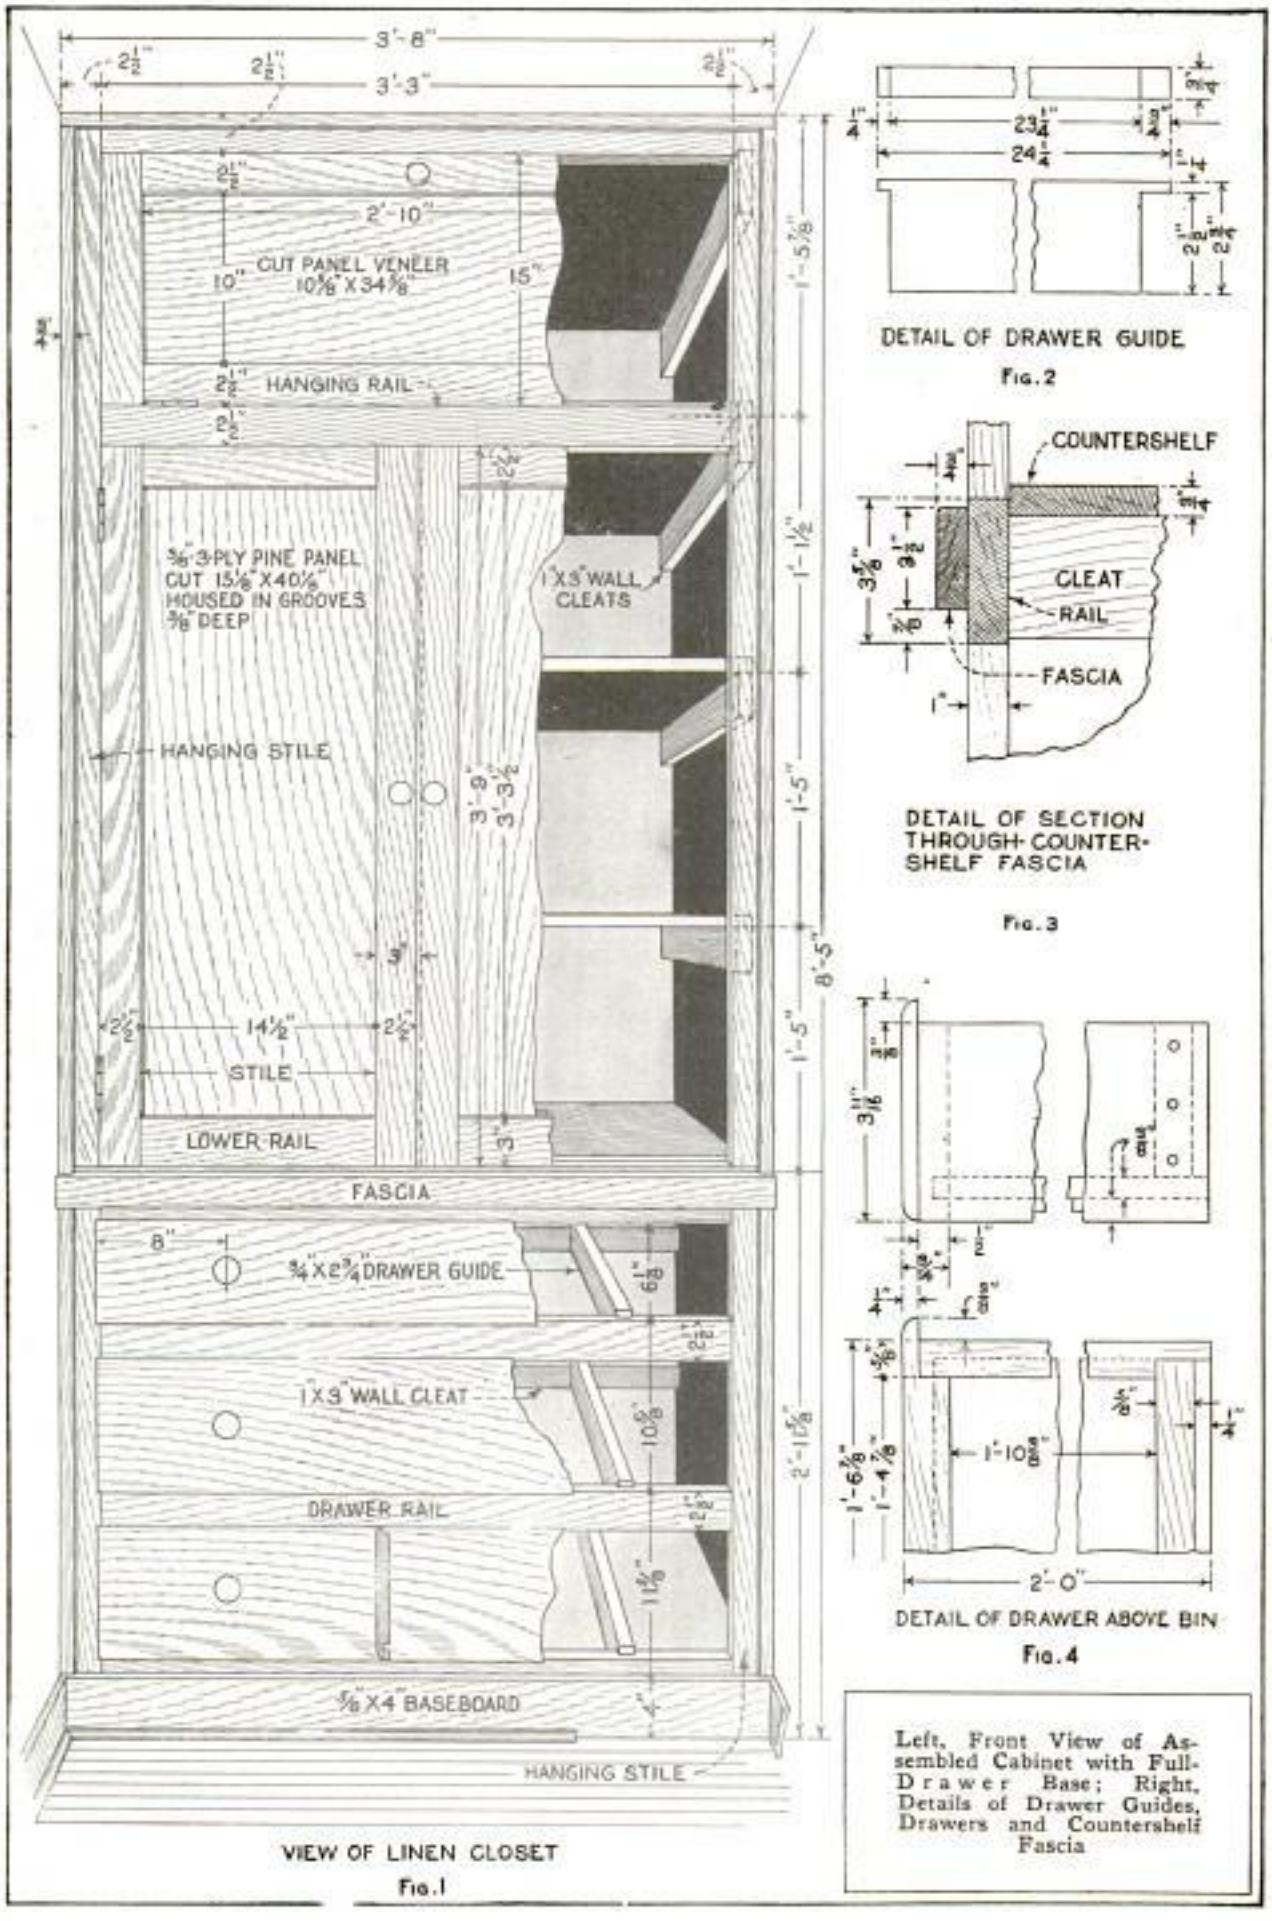

VIEW OF LINEN CLOSET

Fig. 1

DETAIL OF DRAWER GUIDE

Fig. 2

DETAIL OF SECTION THROUGH COUNTERSHELF FASCIA

Fig. 3

DETAIL OF DRAWER ABOVE BIN

Fig. 4

Left, Front View of Assembled Cabinet with Full-Drawer Base; Right, Details of Drawer Guides, Drawers and Countershelf Fascia

Copyrighted material

Part VIII—A Linen Closet Easily Built

THE end of a hall, particularly if located near the bathroom, is an ideal place to build a linen closet. The one illustrated was built in a hall 3 ft. 8 in. in width from plaster to plaster, but the design is readily adaptable to use in a wider or narrower hall by simply changing its width, and by making the drop-door compartment above higher, it can be accommodated to a higher ceiling.

The front frame, 3 ft. 8 in. wide by 8 ft. 5 in. high, is built of 1⅛ by 3-in. pine, sized to 1 by 2½ in. net, except for the countershelf rail, which is 3⅝ in. wide, and the bottom rail, which is 4 in. wide. The hanging stiles run from top to bottom, with all the rails joined between by means of dowels. Stand the stiles on edge side by side, with face sides out and face edges up, and lay off from the bottom ends, 4 in. to top of the bottom rail, 11⅝ in. to the top of the next, 10⅝ in. to the next, and 6⅛ in. to the bottom of the countershelf rail. From the top of this rail to the bottom of the drop-door hanging rail is 3 ft. 9 in., and from the top of this rail to the bottom of the top rail, 1 ft. 3 in.

Using the assembled frame for measurements, lay off on a rod the distances from top to top of the drawer rails, and locate points ⅜ in. below the tops of the countershelf rail and hanging rail. Stand the rod in a corner of the cabinet space and transfer the points to the wall, leveling lines around to guide in nailing on drawer and shelf cleats. The tops of the cleats for the other two shelves are 1 ft. 5 in. and 2 ft. 10 in. from the countershelf cleats. Two feet from the back wall, if there is space to permit that depth of cabinet, plumb lines down on the side walls for alinement of the cleat ends. Nail shelf cleats made of 1 by 3-in. stock, chamfered on the inside lower corners, to the side walls, and against ceiling and floor nail other cleats as backing for the upper and lower ends of the frame. The drawer-guide cleats are of 1 by 2½-in. net stock, nailed on the back wall.

The shelves are glued up to width as placed. Joint up the 1 by 12-in. stock and cut such lengths as will slip snugly between the plaster. To one edge of four lengths glue a strip of 1 by 2-in. stock, nailing through the edge of the narrow strip with eight-penny finish nails. Nail these lengths to their cleats, narrow strip to the back. Fit the other widths so that, when placed, the front edges come flush with the ends of the cleats, and after coating both mating edges with glue, nail the boards in. Drive a couple of corrugated fasteners into the underside of each shelf, using a heavy hammer or handax, held on a protective block of wood as backing, to keep the shelves from driving loose. It is always well to prop each cleat with a stick bearing on the shelf below before attempting to nail up a shelf, so that the hammering will not loosen or move the cleat.

Set the front frame of the cabinet, plumbing the stiles. This may necessitate the chopping of the edges that bear against the plaster. Make no attempt to get a tight fit against the plaster, as the joints are concealed by ¼ by ¾-in. strips scribed to the walls and tacked to the stiles with brads. If the cleats and shelves have been carefully placed, the top of the countershelf will be ⅜ in. above the countershelf rail, and the drop-door shelf will project above its rail a like amount, acting as stops for the doors. Also, the tops of the drawer cleats will be level with the tops of the drawer rails. Nail through the frame stiles into the cleats they bear against, and through the countershelf rail

Copyrighted material

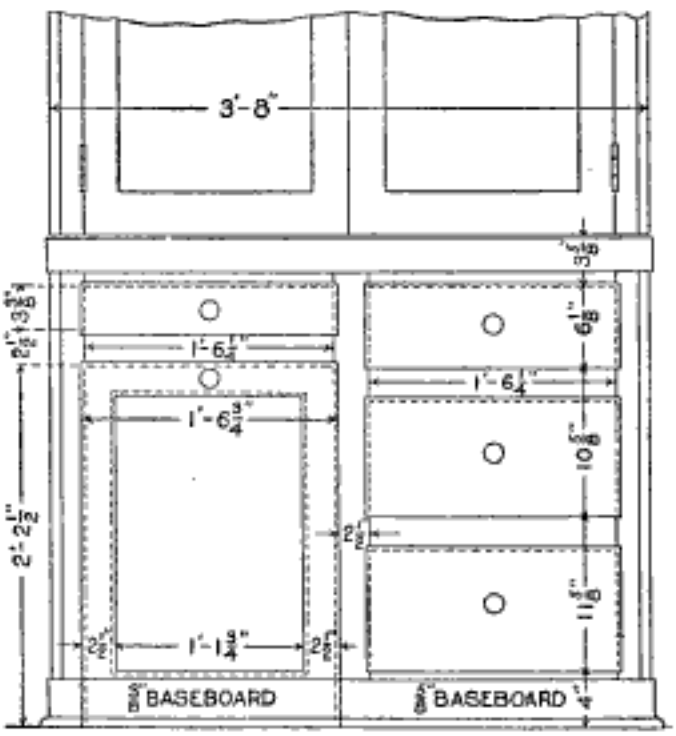

Fig. 5

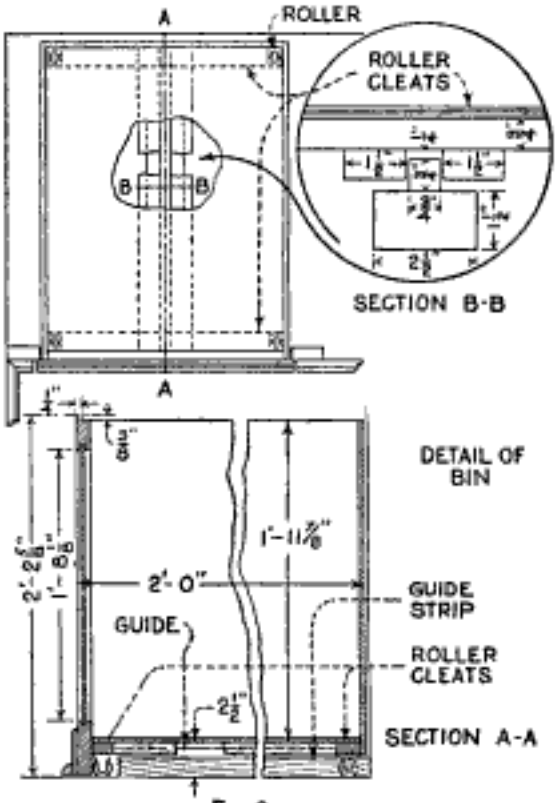

Fig. 6

Details of Alternative Construction of Base, with a Bin Below the Countershelf for Soiled Linen and Clothes on One Side and Small Drawers on the Other

and the drop-shelf rail into their shelves. Each drawer has two guides, placed 6 in. from the ends of the drawer openings. The detail gives necessary dimensions. The length, however, will vary slightly, owing to unevenness of the plaster at the back, for the rails must be kept straight. Toenail the front ends from the back, so that the nails will not show in the front of the rails, and keep the guides square with front.

In building the doors, notice that the lock stile of the left door is 3 in. net in width, rabbeted on the face side ½ by ½ in., leaving the face 2½ in. The corresponding stile of the other door is also 2½ in. wide on the face, but rabbeted on the back, to lap over the rabbet of the left door. So the total width of the left door is 1 ft. 8 in., and that of the right, 1 ft. 7½ in.

Give the drawers ⅛ in. clearance sidewise and 1/16 in. vertically, and leave a ¼-in. lip on ends and top of the front, ⅜ in. deep. Assemble front, sides, and back, and slide the bottom boards in afterward. Square carefully and drive several brads slantingly into the sides from the bottom.

MATERIAL LIST

1 piece, 1⅛ by 3 in. by 16 ft., pine or fir, S4S, sanded.
2 pieces, 1⅛ by 3 in. by 14 ft., pine or fir, S4S, sanded.
1 piece, 1⅛ by 3 in. by 10 ft., pine or fir, S4S, sanded.
1 piece, 1⅛ by 4 in. by 14 ft., pine or fir, S4S, sanded.
1 piece, 1 by 2 in. by 16 ft., pine or fir, S4S, sanded.
3 pieces, 1 by 3 in. by 10 ft., pine or fir, S4S, sanded.
1 piece, 1 by 3 in. by 14 ft., pine or fir, S4S, sanded.
1 piece, 1 by 4 in. by 12 ft., pine or fir, S4S, sanded.
2 pieces, 1 by 12 in. by 16 ft., pine or fir, S4S, sanded.
1 piece, 1 by 7 in. by 4 ft., pine drawer front.
1 piece, 1 by 9 in. by 4 ft., pine drawer front.
1 piece, 1 by 10 in. by 4 ft., pine drawer front.
1 piece, ⅝ by 7 in. by 4 ft., pine drawer sides.
1 piece, ⅝ by 9 in. by 4 ft., pine drawer sides.
1 piece, ⅝ by 10 in. by 4 ft., pine drawer sides.
1 piece, ⅝ by 6 in. by 4 ft., pine drawer backs.
1 piece, ⅝ by 8 in. by 4 ft., pine drawer backs.
1 piece, ⅝ by 9 in. by 4 ft., pine drawer backs.
3 pieces, ⅜ by 6 in. by 14 ft., T & G pine drawer bottom.
1 piece, ⅜ by 6 in. by 12 ft., T & G pine drawer bottom.
1 piece, ¼ in. by 3 ft., by 5 ft., three-ply pine or fir panel veneer.
For bin, 1 piece, 2 by 8 ft., is required.
4 pieces, ½ in. by 8 ft., quarter round.
1 piece, ¾ by ¾ in. by 18 ft., pine, sanded.
1 piece, ⅝ by 4 in. by 4 ft., pine baseboard.
1 piece, ⅜ by ¾ in. by 4 ft., baseshoe.
1 lb. six-penny finish nails.
1 lb. eight-penny finish nails.
2 oz. ⅝-in. brads.
½ lb. four-penny finish nails.
9 glass 1⅛-in. knobs.
2 frog catches.
1 elbow catch.
Time to build, about 32 hours.
Cost of materials, about $12.50.

Copyrighted material

Tracks for the guides are made by tacking a couple of ¼ by ¾-in. strips on the bottom, one on each side of the guide.

Nail a ¾ by 2½-in. fascia on the front of the countershelf rail, showing a margin on top of ¼ in. This not only looks neat, but prevents the doors from rubbing the top edges. Hang the doors with the hinges lining with the rails, and after painting put on the catches and knobs.

Cut the ⅝ by 3½-in. baseboard between the old base, fit the shoe, and sandpaper the cabinet thoroughly for painting.

A useful variation of the chest of drawers is to put a vertical stile in the center below the fascia, having short drawers on the right side and a deep bin for holding soiled clothes on the left. The layout for the shelves at the right is the same as before, except, of course, that they are shorter, and that the guides should be centered in the opening. The upper bin rail is 2 ft. 2½ in. above the floor, leaving an opening for the drawer above of 3⅜ in.

Build the front like a panel door, with stiles 1 by 2½ in. and lower rail 4 in. wide. The frame is 1 ft. 6¾ in. by 2 ft. 2⅝ in. over all, rabbeted to make a drawer lip on top and sides. Build the bin of ⅜-in. three-ply pine panel veneer, making it 2 ft. long and 1 ft. 6 in. wide, giving a clearance of ⅛ in. on each side.

The bottom is nailed between the sides and back, the underside being 2⅜ in. above the bottom edge of the front. A cross cleat of 1 by 2-in. pine is glued and nailed to the bottom behind the front rail and under the back, as shown, and on the ends of these are mounted swivel casters. These enable the bin, even though heavily loaded, to be moved with ease, and wheeled into the laundry porch if desired. To insure its moving smoothly into the cabinet, guide strips of 1 by 2-in. stock, set 15/16 in. apart, are nailed to the cleats, running from front to back; and on the floor is nailed a guide built up of a base of 2 by 3-in. pine with a ¾ by ¾-in. strip on top, which slides between the guide strips on the bin. Soap or wax this slide, and widen the back end of the channel for an inch to facilitate replacing the bin after removal. Face the lower rail with ⅜-in. baseboard, ⅛ in. narrower than that on the rest of the cabinet, nail the shoe in place, and adjust the casters so that the front of the cabinet will clear the floor ⅛ in. Drawers, bins and shelves may be waterproofed with boiled linseed oil.

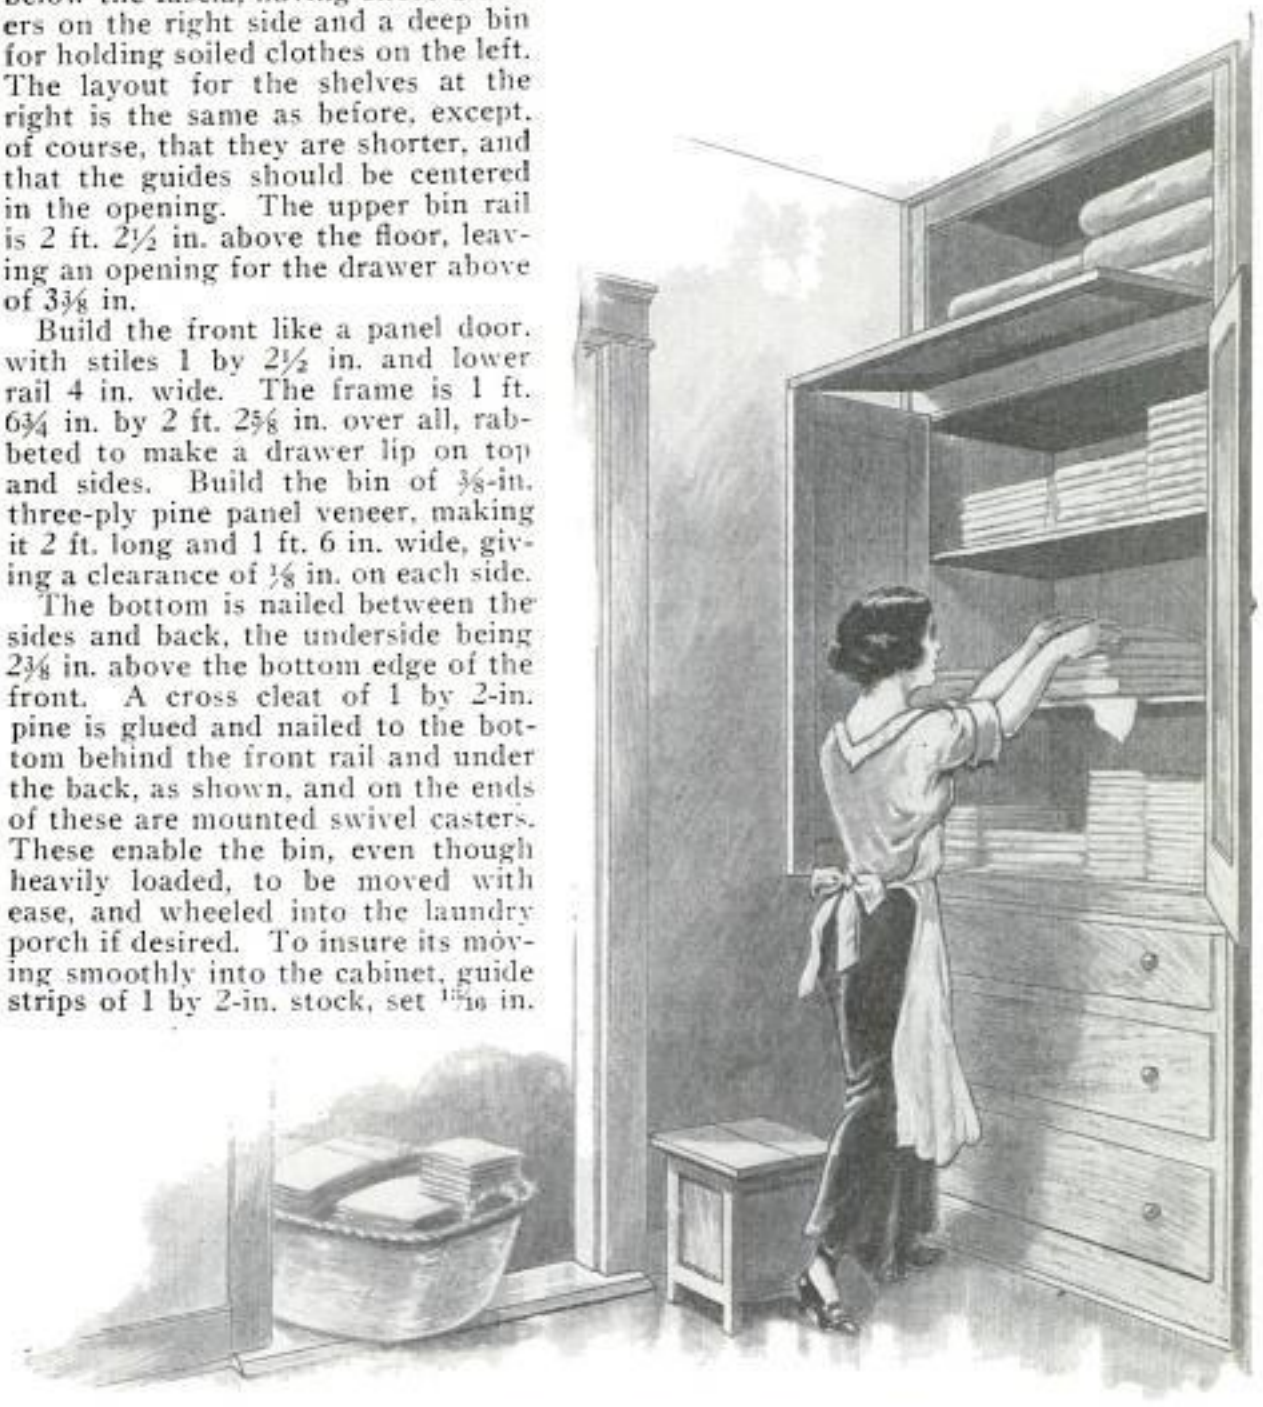

Here Is a Linen Closet That Can Be Built at the End of a Hall by the Amateur Craftsman in a Few Hours

Copyrighted material

Rain-Proof Sleeping Porch

It often happens during a storm that the rain strikes the curtains on the sleeping porch and runs down on the inside,

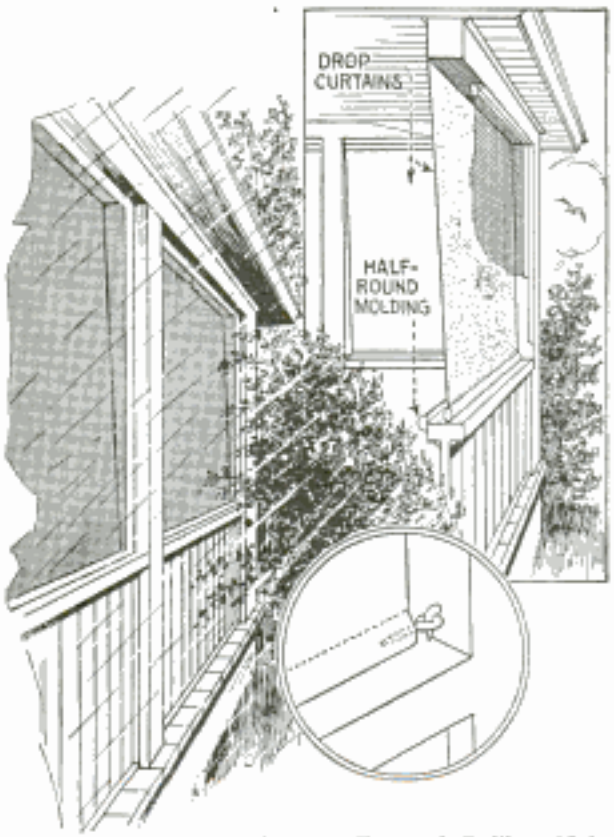

Strips of Molding Nailed on Edge of Railing Make Sleeping Porch Rain-Proof

forming puddles of water on the floor. This trouble can easily be prevented by arranging the curtains as shown in the illustration. They are brought down to the plate of the railing, or to the floor if there is no railing, and a strip of molding or other thin wood is nailed to the top edge of the plate or to the floor on the inside of the curtain as indicated. This makes it impossible for the rain to get on the porch. The curtains are, of course, fastened at the bottom in the usual way, as shown in the insert, a screweye being driven into the end of the pole and hooked on an L-hook, driven into the porch post, as shown.—J. G. Pratt, Washington, D. C.

Repairing Auto Curtain Fasteners

On many open cars the curtain fasteners are attached to the wood rail along the top of the body by two wood screws. The rail often dries out and splits, and the screw holes become rusty and enlarged, causing the fasteners to come off. This trouble can be prevented by bolting each fastener to a 2-in. strip of flat iron and screwing this to the rail. The upholstery binding tape is first loosened at the points where the fasteners are to be attached, holes are drilled for the nuts and bolt ends where the old screw holes are, and the strips then screwed down on the rail.—E. T. Gunderson, Humboldt, Iowa.

Preventing Bed from Marring Baseboard

Marks and cuts on a bedroom baseboard, due to moving the bed around, can be prevented by placing a narrow piece of hardwood on the floor along the edge of the baseboard, behind the legs of the bed. This forms a bumper for the casters, and it is then impossible to push them against the wall. The piece of wood may be painted or varnished and, in any case, is not likely to be noticed by the casual observer.—Charles A. Goddard, Los Angeles, Calif.

Separating Cream from Milk

A separator that siphons off the cream from a bottle of milk and automatically stops the flow when the cream line is reached, is shown in the illustration, and can be made for about the price of a bottle of milk. All that is necessary is a No. 11 2-hole rubber stopper, and a 15-in. length of 3/16 or 1/4-in. glass tubing. Two bends are made in the tubing, one about 8 in. from the end, and another 3½ or 4 in. from the first. The tubing can be bent by holding it in a gas flame or that of an alcohol lamp, turning the tube in the fingers and moving it back and forth in the flame so that it is heated for about 1 in. of its length. When it begins to bend of itself it is taken by the ends and bent gently, at the same time moving the point where it is bending most out to the edge of the flame. By bending slowly and spreading the bend over 1½ in. of the tube

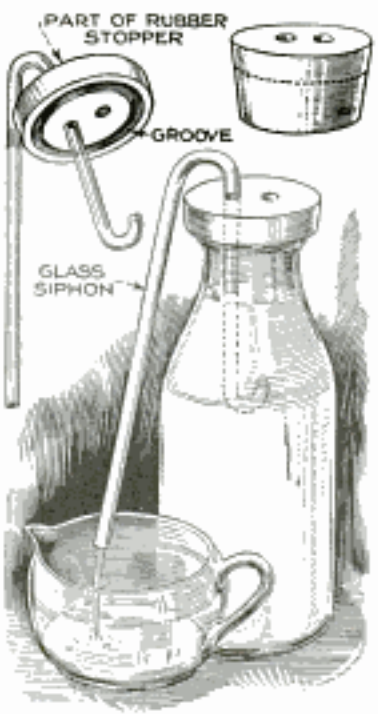

Copyrighted material

a smooth even bend will result. The tubing is broken off just above the second bend by scratching it on one side with a three-cornered file, grasping it on either side of the scratch with the fingers and giving it a quick snap. The rubber stopper is cut with a very sharp knife to leave a section 5/16 in. thick; this is laid over the mouth of the bottle and the outline of the mouth traced on the rubber. Concentric with this another circle is drawn, 3/8 in. smaller in radius; now, with a sharp knife a circular groove is cut around the stopper, about 3/16 in. deep, between the circles. The stopper and tube are then assembled as shown, and put in place so that the short arm comes to the cream line. Close the open hole in the stopper with the thumb and thrust sharply downward, then withdraw the thumb. The sudden pressure starts the flow of the siphon and it keeps on running until the cream line is reached.

Platform for Washing Autos

For washing automobiles, a concrete platform of the kind shown in the photo will be found neat as well as useful. The water dripping from the car is caught in the tracks and is drained through holes into a sump, thus preventing the dirty water from getting all over the floor. An incline, which is similarly grooved and is wider near the floor to make it easier to guide the car onto it, leads up to the platform. The edges of the concrete are, of course, rounded to prevent injury to the tires.—C. W. Geiger, San Francisco, Calif.

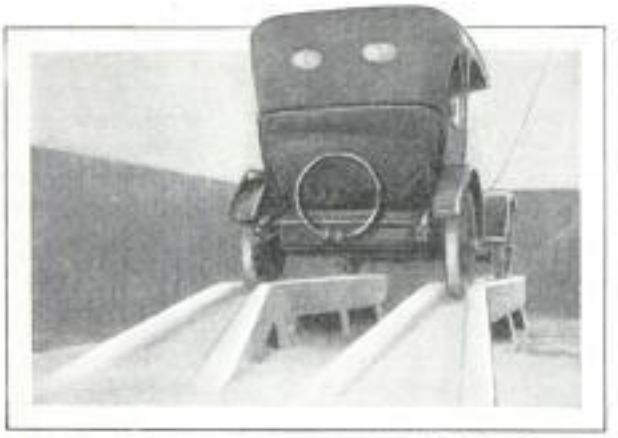

Elevated Concrete Runway Aids in Washing Car and Drains Away Muddy Water

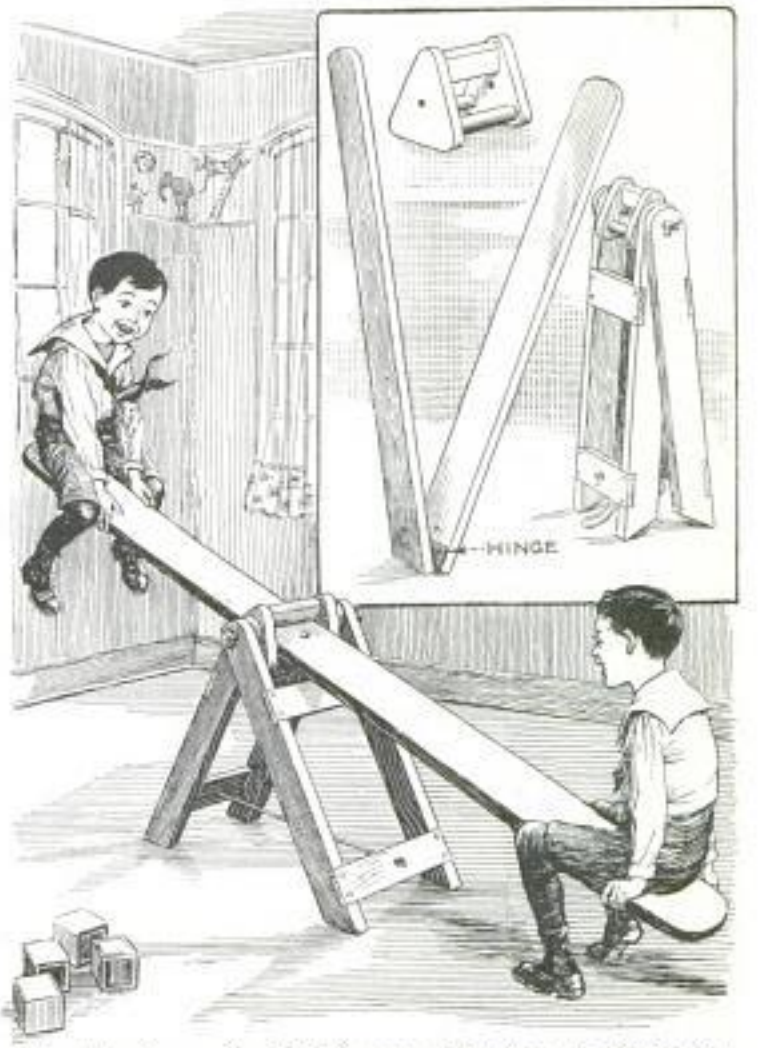

Collapsible Seesaw for the Playroom That Can Be Stored in a Small Space When Not in Use

Folding Seesaw Amuses Children Indoors

For the recreation and amusement of children during rainy weather when they cannot play outdoors, a seesaw of the kind shown in the drawing is especially suitable for the playroom. It is a folding affair so that it can readily be stored away in a small space when not in use, and its dimensions permit it to be carried around without much trouble. It consists of the three parts, shown in the detail. The board, of 2-in. material, well planed and about 6 ft. long, is hinged at the center with an ordinary door hinge securely bolted to it so that the leaves are on the top side. The frame is made of 1 and 2-in. material with a length of rope at the bottom to keep the legs from slipping too far apart. The pivot of the seesaw is made as shown in the detail, and bolted to fit the top of the frame so that it can swing freely. To add to the appearance of the toy a couple of coats of paint should be applied.—Geo. K. Heist, Winchester, Va.

Copyrighted material

Sedan Hat Rack Made from Springs

Hats are not usually needed when riding in a sedan, and when carried on the lap, are rather a nuisance. A novel hat rack, which holds the hats entirely out of

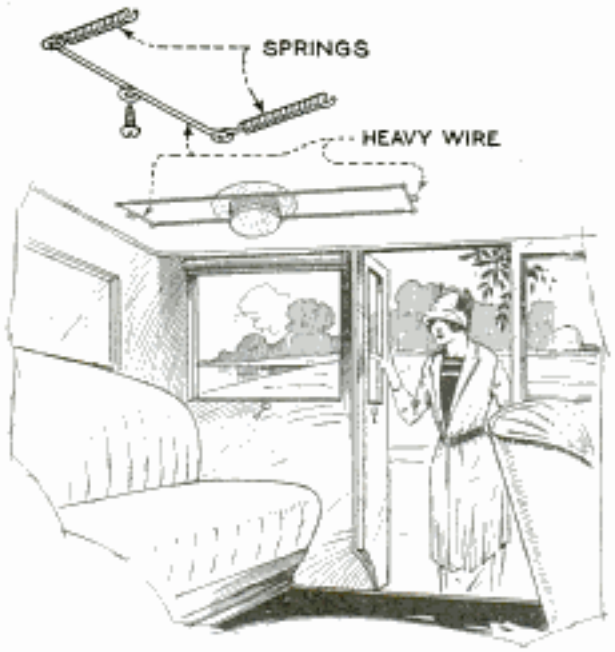

Hats Held Conveniently on a Spring Holder Attached to the Top of a Sedan

the way, is shown in the drawing. Wire braces are bent to the shape shown and are screwed to the ribs supporting the top. Two screen-door springs are then hooked to the ends of these braces, which have eyes formed at the ends, about 6 in. apart, so that the space between the springs will easily accommodate the crowns of the hats. The hats are slipped with the rims under the springs as indicated, and will be held in this position securely.—Frank Harazim, New York City.

Applying Undercoat for Enamel

One of the reasons that some enamel jobs do not turn out satisfactorily when done by an amateur, is that no attention is paid to the color or tint of the undercoating applied. Many professional interior finishers even commit this error, so there is some excuse for the amateur. The tint or color of the undercoating should be as close a match as possible to the enamel to be applied over it. There is another excellent reason for carrying out the above suggestion; in cleaning the enameled surface from time to time, it is bound to wear or become chipped. If the undercoating is of a different color it will show through the chipped or worn parts and, in that case, there will be no other remedy than repainting.

Bird Houses That Grow from Seeds

Weatherproof homes that the birds like and use may be made in unlimited number by simply planting a package of "dipper gourd" seeds along a fence; then, when the fruit is ripe, remove from vines, boil in a washboiler, scoop out center through small opening, and later run a wire through the top of neck for a hanger. Push a peg in below the hole for a perch. Allow them to dry for a few weeks. When dried, paint the inside and outside, and leave in the attic or anywhere handy until spring, when the birds are expected. The bird houses must be "weathered" so that there is no smell of paint, and they should be put in place before the first birds come.—Mrs. V. S. Martin, Detroit, Mich.

Repairing Holes in Water Pipe

A small hole in a low-pressure water pipe may be repaired in the following way: Take a piece of tinfoil of the type wrapped about certain brands of tobacco and confections, shape it into a sharp-pointed cone and tap it, point first, into and over the hole with a light hammer. Then wrap tightly with friction tape. A repair of this kind has been effective for over two years on an iron pipe carrying water at a pressure of 20 pounds.

Cheap Cabinet for Small Parts

A handy rack for holding small nails, screws, cotter pins, and the like, can be made in the following way: Obtain a stout wooden box, 7 in. wide, 10 in. deep, and about 16 in. long, inside dimensions, and half a dozen biscuit tins, which are usually rectangular in shape, about 7¼ by 10½ in.

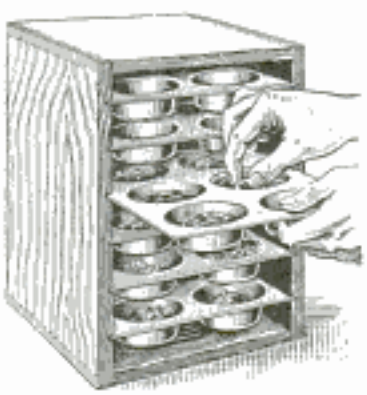

in dimensions, and have six circular depressions, 3½ in. in diameter. Remove the bottom of the box and saw grooves, ⅛ in. wide and ¼ in. deep and spaced about 2 in. apart, in the sides as shown. This can be done easily if the bottom is temporarily removed. Nail on the bottom again and slip the pans into the slots. They can be used as drawers or can be taken out separately.

Copyrighted material

All Shop Notes published in 1924, in book form—Fifty Cents—from our Book Department

Mixing Box Aids Concrete Work

By J. R. KOONTZ

MANY small concrete jobs on the farm are put off or left undone entirely for lack of a box in which to mix the concrete. Often there is a corner post to be cemented in, or other little jobs to be done that require only a few pails of the mix; to hunt up a suitable box every time takes up more time than the job itself, with the consequence that the job is often held over to another day—which never comes. If the farmer will make a special mixing box as shown in the accompanying illustrations, he will find that most of the labor is taken out of the chore of mixing concrete. The box can be made in an hour or two of spare time, and will last for years, so that it will prove a paying investment, aside from the decided convenience of the device when in use. Get two pieces of lumber, 2 in. thick, 4½ ft. long and 6 or 8 in. wide, preferably oak or other good hardwood, and round off one end of each to the shape of a sled runner, then cut notches in each upper edge and bolt 2 by 4-in. cross members, 36 in. long, to them. Spikes can be used to fasten the crosspieces instead of bolts, if desired; if bolts are used, both the heads and the nuts must be sunk into the wood to clear the ground on the one side and the box on the other. On top of the sled build a platform from good boards, 4

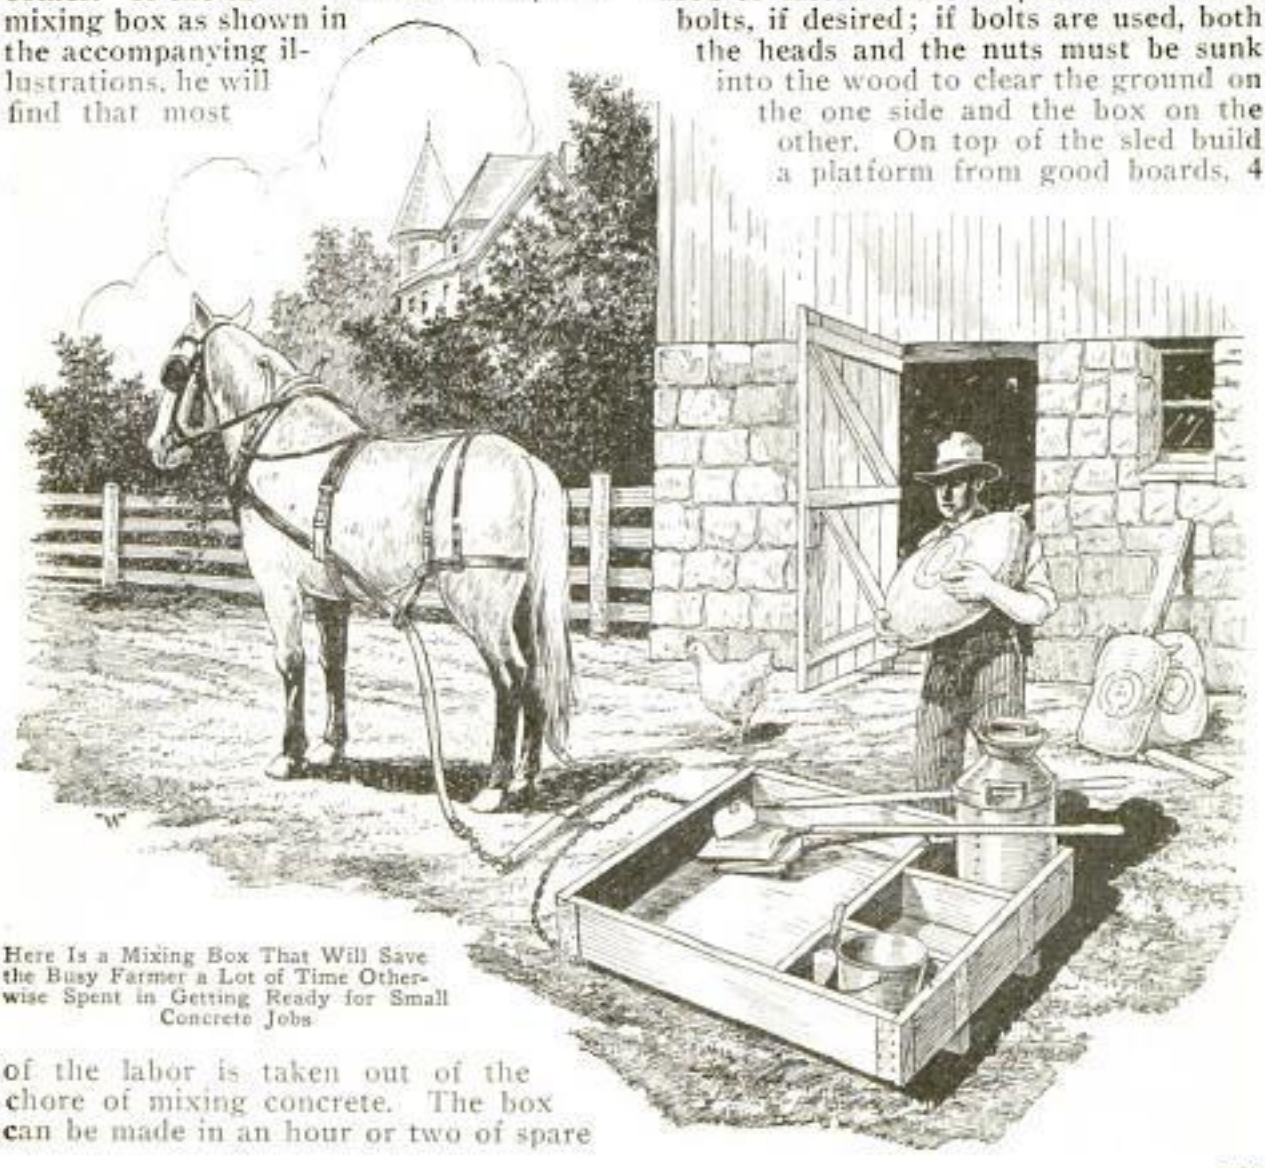

Here Is a Mixing Box That Will Save the Busy Farmer a Lot of Time Otherwise Spent in Getting Ready for Small Concrete Jobs

Copyrighted material

ft. square, and, with 8-in. boards, make this into a box divided into four compartments as shown in the drawing, then bind the corners and the junction of the main partition with the side boards with galvanized sheet iron. If there is enough sheet metal on hand to cover the bottom of the box, it should be applied as an additional precaution against leaking; if not, the joints in the bottom must be made as tight as possible. The mixing compartment should be about 3 ft. wide. Bore two holes in the front ends of the runners and pass through the holes a length of chain or cable to serve as a hitch, and the box is completed.

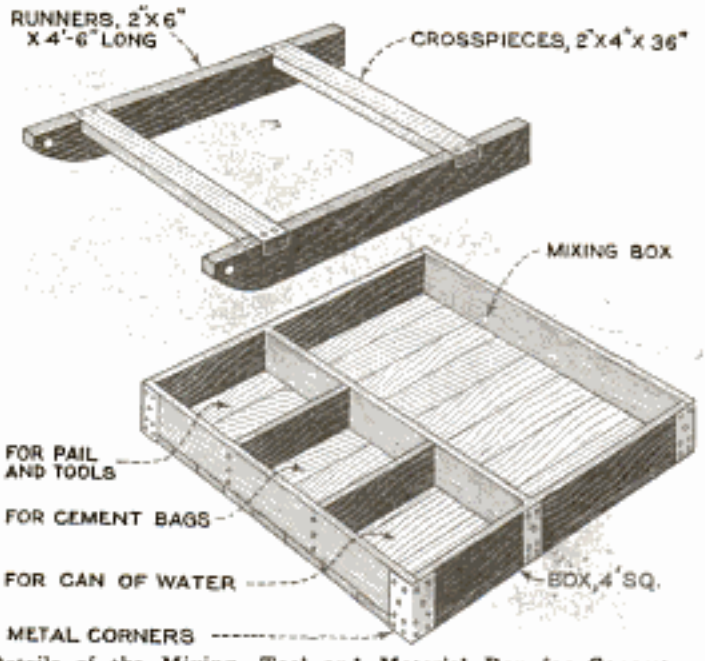

Details of the Mixing, Tool and Material Box for Concrete; Above, Construction of the Sled Frame

Now, a few pails of sand can be placed in the proper compartment, a bag of cement, a can of water and all the necessary tools each in their own place, and then the team hitched onto the sled to drag it to the place where the work is to be done. After the job is finished, the outfit can be put under shelter with the tools and supplies left in place ready for the next small job. If no shelter is available, the materials should be removed and stored in a dry place, and in this case the sled should be given one or two coats of creosote to preserve it from the weather.

If desired, the frame can be fitted with wheels instead of making it into a sled. The wheels, if used, should not be over 12 in. in diameter, so as to keep the box at a convenient height for mixing and placing the concrete.

Quenching Heated Tools

When taking hold of a tool that has been heated all over, it is important that the tongs are not cold or damp. They should be brought to a dark-red heat. It is also advisable to use tongs that have sharp grips, so that there will be as little contact between the tongs and the tool to be cooled as possible. If these precautions are not followed, cracks may result in the tool due to uneven cooling.

Emergency Method of Finding Wire Diameter

When a wire gauge or micrometer is not at hand, the improvised V-gauge shown in the illustration will serve to measure the size of any wire. A steel scale is held against a straightedge securely by means of a rubber band. A short length of wire of known size is used for a spacer and is placed between the scale and the straightedge at an even inch point of the scale, say, at C. The wire to be measured, if smaller than that used as a spacer, is pushed down in the V-shaped slot thus formed, until it fits snugly in it without lifting the tied end of the scale. The distance of this point, B, from the end A of the scale is noted, and the size of the wire is found by multiplying the diameter of the spacer by the distance AB and dividing the product by the distance AC. If the wire to be measured is larger than the spacer, it is slid between the scale and straightedge to the right of the spacer as before, but the rule for calculating its size remains the same. Or a spacer larger than the wire of unknown size may be substituted if at hand.—E. S. Therkelsen, Moore, Pa.

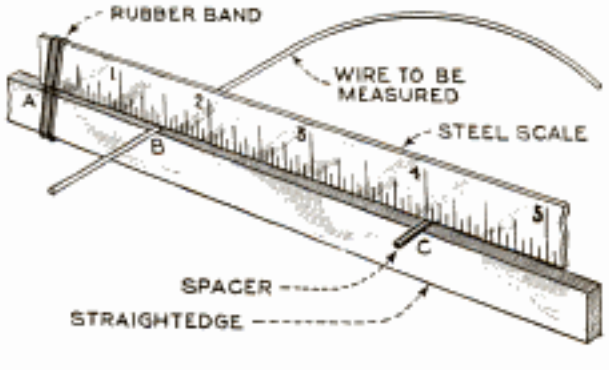

Emergency Method of Finding Size of Wire with Steel Scale and Straightedge

Copyrighted material

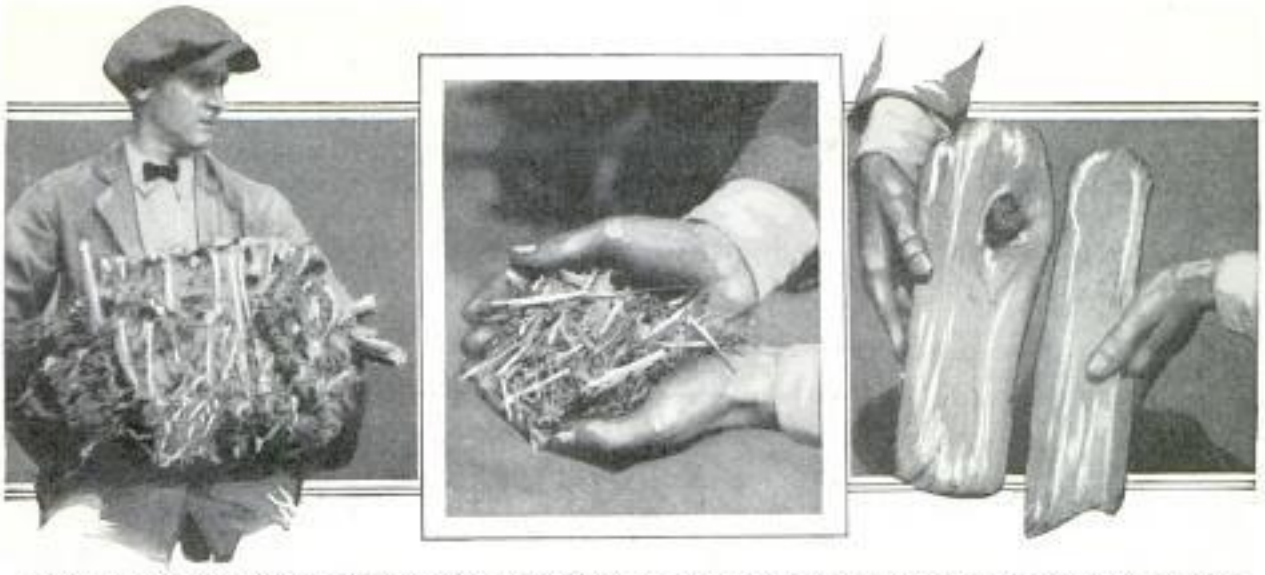

Burning Pressed Bark from Which About Fifty Per Cent of the Moisture Is Eliminated, Reduces Fuel Cost of Paper Mill About $75 Daily

Pressed Bark for Fuel

Pressing about fifty per cent of the moisture out of bark changes it from an uncombustible and cumbersome waste to a good fuel. It has been used to replace some of the coal required by a large paper mill, and it is estimated that a saving of $75 per day was effected by using this waste. The photo at the left shows pressed bark mixed with wood waste as it goes to the boilers. Splinters and chunks of wood, like those shown in the other two photos, which run off with the water from the barker drums and are a source of stream pollution, are handled with ease along with the bark.—Forest Products Laboratory, Madison, Wis.

Safety Guard on Power Switch

Push-type switches of the kind shown in the illustration are often used on electrically operated machines, and if no safety guard of any kind is placed over them, they may be accidentally thrown on, at a moment when this would be dangerous. A simple guard can be made in a few moments by drilling a finger hole through a short strip of flat metal, bending it over the "on" plunger of the switch and screwing it down securely as indicated. It is then impossible to push the plunger in unless the finger is inserted through the hole in the guard. Of course, a similar guard is unnecessary on the "off" plunger as no danger is usually connected with the machine stopping unexpectedly.



Convenient Draftsman's Tray

There are sliding trays, disappearing ink wells, etc., all to facilitate the draftsman's work, but these aids are often more or less complicated, get out of order quickly and are therefore soon discarded. A handy tray, which has proved convenient in actual practice, is not in the way, and is simple to make, is shown in the illustration. A small wooden trough, divided into three or four compartments to hold pencils, erasers, instruments and ink well, is nailed to one edge of the drawing board or to the edge of the table. In order not to interfere with the use of the T-square, it should be so attached that it does not project above the surface of the board. By keeping the instruments in compartments, the draftsman knows exactly where to find one quickly when he needs it.

Painting Old Window Shades

Take stiff white lead, containing little oil, and mix to a stiff paste with turpentine; add color as desired. Stretch the shade on a frame and apply the paint with a broad-bristle brush. It should be used thin, and a second coat may be necessary. The less paint required the better the work will be. Lay the paint off in a crisscross manner, not straight.

Copyrighted material

Protecting the Dividing Head

By A. W. BULMER

THE device shown in the accompanying illustrations has solved a big problem for the Southern California Edison company in their machine shop, and jobbing shops all over the country should appreciate the utility and simplicity of the attachment also, as many of them have encountered the same difficulty—that of holding large gear blanks securely while milling the teeth, and protecting the dividing head from undue strain. One of the photos shows a 78-tooth gear of 3 diametral pitch, cut with the device in position, and another a gear weighing 650 lb., 48 teeth, 25 in. diameter and 8-in. face, of 2 diametral pitch, accurately finished on a No. 3 plain milling machine, the depth of cut being 1.079 in.

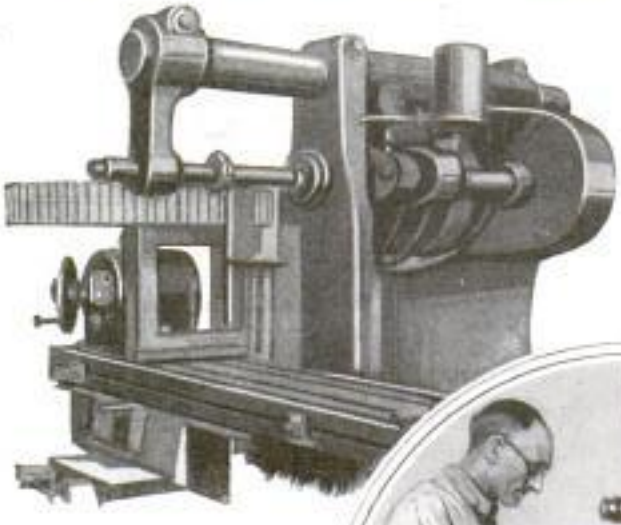

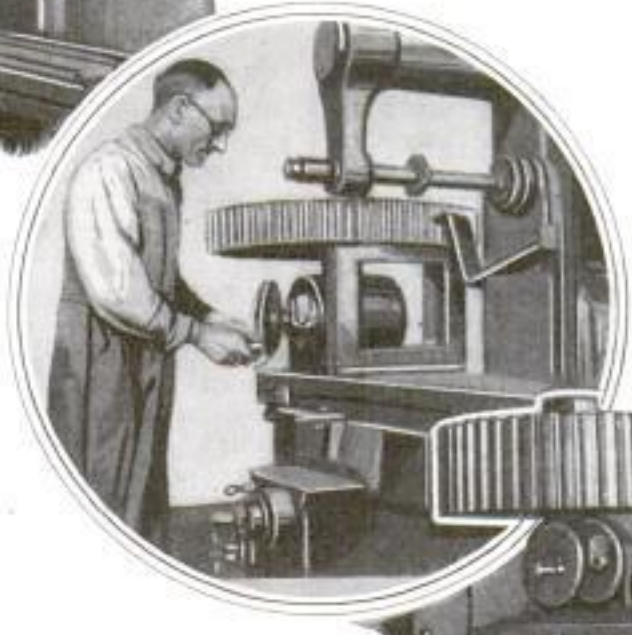

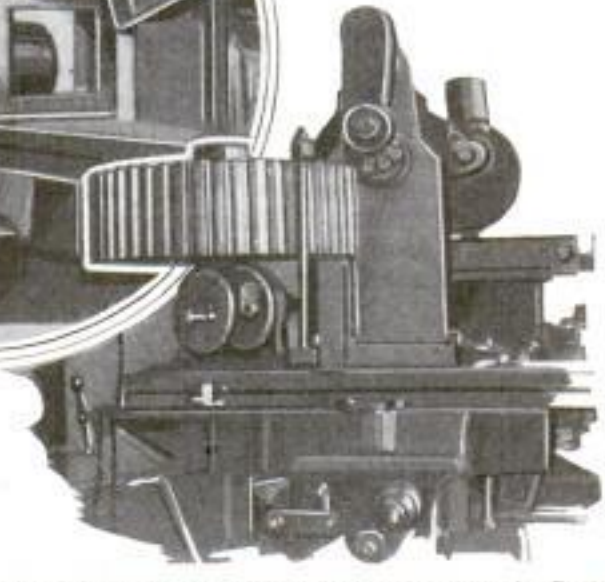

Above, Cutting a 78-Tooth Gear with Rest in Position; Center, Indexing the Gear; Below, Cutting Teeth on 650-Pound Gear

The device is merely a rectangular casting, the sides and top being 2 by 2 in. square, and the bottom 2 by 2½ in. in size; the top and bottom are planed, and the rest is adjusted to height, which, of course, varies for different gears, with ordinary key-steel blocks, the fine adjustment being made with shim steel, .005 in. thick. The rest is clamped to the table with two ⅝-in. bolts, as shown in one of the photos.

The principle of clamping the work directly to the table is sound, as it relieves the dividing head of the thrust and strain of the cut and the side strains of a slightly wobbly cutter. It also permits faster feeds and heavier cuts, which more than offsets the time lost in releasing the clamp while indexing the gear. By the use of the rest, an accurate product is also assured.

The work shown in the lower photo is a wonderful performance for a small machine, and was made possible only by this device. It would not be advisable, under any circumstances, to mount gears of this weight on the dividing head without some additional support, yet, in the jobbing shop, the miller is the only machine usually available for cutting the gears. The pattern for this device is very simple and does not demand the services of a patternmaker, so it would pay any small shop to have several of them made up, as they can be used not only for gear cutting but also for blocking other heavy work on the milling-machine platen; their general utility will offset their slight cost, and, in many cases, they will save the time of the operator that might be spent in hunting for suitable blocking for heavy castings.

¶It is usual practice to add japan to paint to hasten its drying but this rather retards than hastens the process and makes the paint dry soft. It is better to add about one-fourth as much water glass as the quantity of paint.

Copyrighted material

Hardening Carbon-Steel Tools

A small pocket compass is a valuable aid to the carbon-tool hardener. It should be placed on a wooden box or a stool in such a position that the heated tool can readily be swung over it from time to time, while it is being heated. When cool, the tool will cause the compass needle to deflect, but when the tool has been heated it has less effect. As soon as no deflection of the needle is noticed, it is time to quench the tool. It must be remembered, however, that the tongs used to hold the tool will also cause the needle to deflect, so a brass hook should be used to hold it above the compass. The temperature at which the tool should be quenched is called the "decalescence point" and this is the point where the magnetic effect of the steel disappears.

Pulverizing Stone Fences

Farmers in southeastern Kansas are pulverizing their stone fences to get limestone dust with which to "sweeten" their soils. Legumes, such as alfalfa, clover, cowpeas, etc., will not grow in acid soils and the application of limestone corrects this condition. The pulverizing equipment is owned by individual farmers, groups of farmers and farm organizations, and consists simply of an ordinary portable rock-crushing machine. The cost of pulverizing is about 85 cents per ton, and the material lies in abundance in fields and pastures. The photograph shows a stone fence being pulverized with this machine. —J. M. Collins, Kansas City, Mo.

Pulverizing Stone Fences to Obtain Lime for Sweetening Soil

Portable Picnic Table

In parks and picnic grounds where tables and benches are usually provided, it is rather inconvenient to move them from place to place. The combined table and benches shown in the illustration, therefore, is an improvement, as it can be moved wherever necessary. Two of the legs are provided with wooden wheels, about 10 in. in diameter, fitted with metal tires and hubs, cut from pipe. Bolts, fitting inside of the hubs, serve as axles. The construction is clearly shown. One end of the table is lifted and the outfit can then readily be pushed along like a wheelbarrow.—C. L. Meller, Fargo, N. Dak.

Portable Picnic Table Can Be Wheeled Wherever Needed

Preventing Solder from Spreading

Whiting, mixed in water, may be used to prevent solder from spreading in fine jobs, where the surface must be kept free from solder except at the point where it is needed. A fine brush is used to paint the whiting over the metal outside of the soldered area. When applying flux, care must be taken not to permit the whiting to absorb too much. The solder is then applied in the usual manner.—Sherwood J. Gee, Montpelier, Idaho.

Copyrighted material

Borders for Halftones

Newspapers and other publications using halftone cuts for illustrative purposes often desire some kind of fancy

Bristol-Board Masks for Newspaper Halftones Eliminate Considerable Art Work

border for the photos. Rush work, or the lack of an adequate art department, often makes it impossible to form a border by the usual blocking-out process. The following system was devised to overcome this difficulty, and provided a quick and easy way of providing borders. A number of border designs are drawn by an artist upon white, smooth Bristol board, not too thick. The space where the photo is to appear is cut out carefully with a razor blade, the remainder forming a mask. In use, this is placed over the photo in the desired position. The resulting halftone will be no different from those produced in the usual way. It often happens that the mask is not of a size to fit the picture. This does not render the process useless, however, for the mask can be enlarged or reduced to the desired size and then the photo can be combined with it in the desired proportions. It has been found advisable to have available a supply of masks of varying sizes and designs to prevent monotony arising from too frequent use of the same mask. The system described has been used for some time by two large Ohio newspapers.—W. E. Burton, Kenmore, Ohio.

Flat Oil-Water Paint

Place 50 lb. of gilders' whiting in a washtub and cover it with water; let it stand overnight to permit the water to percolate through the mass. If any water remains on top in the morning, pour it off. Beat up the mass with 2 gal. of hard oil or gloss oil, or any cheap varnish, and stir in any desired coloring. Thin down with benzine; but if the higher cost of turpentine is not objectionable, this is a better thinner. This paint dries flat and without luster.—A. A. Kelly, Malvern, Pa.

Swinging Booms on Service Car

By mounting two swinging booms, made of heavy pipe and fittings, on the chassis of a light automobile made over into a service car, an Alabama dealer increased its usefulness considerably. The two booms are fastened together at the rear with two cross members of iron. Recently the car was sent out for a one-ton truck loaded with lumber, which had gone over a 20-ft. embankment. The truck was pulled up without unloading it. This was done by swinging the two booms at right angles to the car, anchoring one to a tree on the side of the road opposite the wreck, while the other boom was used in pulling up the truck.—Archie Richardson, Decatur, Georgia.

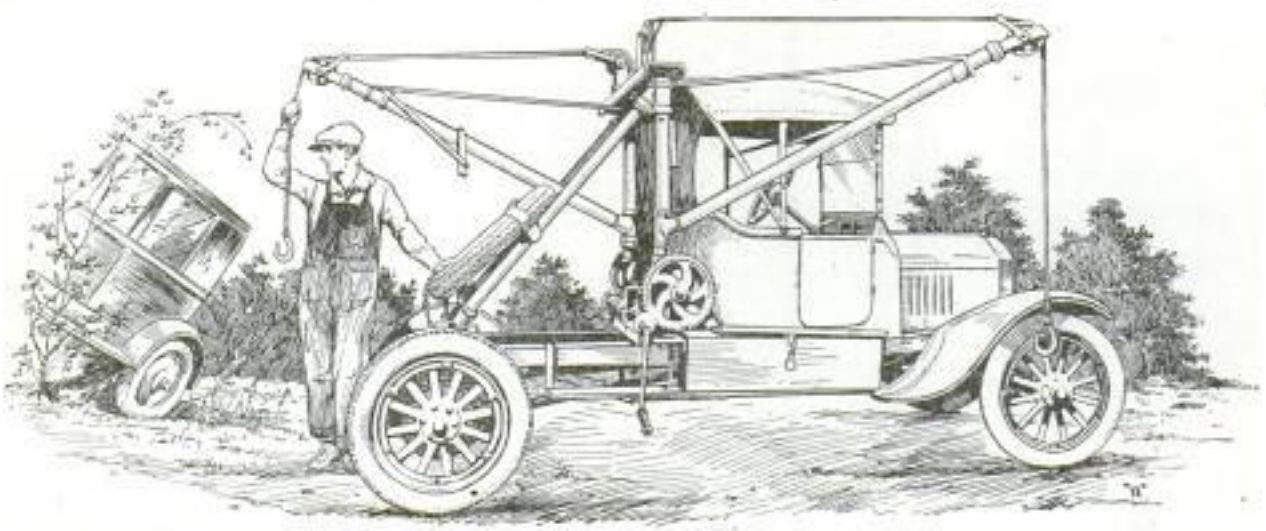

Service Car Equipped with Two Swinging Booms Made of Heavy Pipe Is Found Useful for Lifting Heavy Cars up Embankments as Well as for Towing Purposes

Copyrighted material

How To Use Twist Drills

Part II

WHEN we refer to the "speed" of a drill, we mean the speed at the circumference, called the peripheral speed. Speed, in this case, refers to the distance the drill would travel, if, for instance, it were laid on its side and rolled. Thus, a drill with a peripheral speed of 30 ft. per minute would roll 30 ft. in one minute. Speed, as generally used, does not refer to rotation per minute or revolutions per minute, unless this is specifically stated.

Except under certain rather rare conditions, a drill does not pull itself into the work like a corkscrew—it requires constant pressure behind it to advance it. This advance (measured in fractions of an inch per revolution) is called "feed." Feed pressure, however, is the pressure required to maintain the feed. The feed is produced either by hand or power to force the drill into the work.

Opinions differ regarding the correct speed and feed, therefore we must come to the conclusion that no hard-and-fast rule can be given. The following suggestions should be considered merely as guides. Under any given condition, the correct speed and feed can only be determined by the application of good sound judgment in each particular case.

Starting Speeds and Feeds

In starting a drill, bring it down to the work by hand feed until it centers itself in the work. Then throw in the power feed. It is a safe rule to start drills made of carbon steel with a peripheral speed of 30 ft. per minute, if they are working in soft tool or machinery steel; this should be increased to 35 ft. per minute for cast iron and 60 ft. per minute for brass. The starting feed should vary from .004 to .007 in. per rotation for drills ½ in. in diameter and smaller; for drills larger than ½ in., .005 to .015 in. per rotation. At these speeds and feeds, it is recommended that a good cutting compound be used.

In the case of high-speed drills, the above feeds should remain unchanged; the speeds, however, should be increased from 2 to 2½ times. We suggest that the drill be started with a moderate speed and feed, increasing either one or both after observing the condition of the drill. That the observations may be intelligent and the adjustment of speed and feed based on the requirements, carefully observe the behavior of the drill, as we will now proceed to tell.

Indications of Too Much Feed

If the drill chips out at the cutting edge, it is a sure indication of too heavy a feed or too much lip clearance. If a drill splits up the web, it is also evidence of too much feed for the amount of lip clearance. Decrease the feed or increase the lip clearance, or do both. Failure to give sufficient lip clearance at the center of the drill will cause it to split up the web. On the other hand, too much lip clearance at the center (or any other point on the lip) causes the cutting lips to chip. Therefore, before blaming the feed, it would be well to make sure that the drill is properly ground. If it is, decrease the feed.

FIG. 20
Drill Run at Too Great Speed

Courtesy Cleveland Twist Drill Co. ©

Copyrighted material

Indication of Too Much Speed

When the extreme outer corners of the cutting edges wear away too rapidly (Fig. 20), it is an evidence of too much speed. High speeds in cast iron tend to wear away the margin of the drill; 35 ft. per minute is the maximum we would suggest for carbon drills in cast iron. The feed may be from .007 to .015 in. per rotation according to the hardness of the metal being drilled. In general, a high speed with a light feed is recommended. It is better to err on the side of too much speed than on the side of too much feed, except for cast iron where the nature of the metal may permit an unusually heavy feed. The speed can be increased to the point where the outside corners commence to show signs of wearing away. When such signs are noted, the speed can be slightly reduced and then maintained at this point.

FIG. 21

Special Grinding for Very Hard Material; the Rake Angle Is Reduced

Drilling Hard Material

Very often, even after the drill has been ground properly and the speed has been increased to the extreme limit, the drill still fails to penetrate. This is usually caused by a hard spot in the material itself, and can be remedied, or at least materially helped, by liberal application of turpentine directly to the work. The drill may be assisted in almost any hard material by the use of turpentine or kerosene. Another method is to reduce the entering angle of the lips (the rake angle) as in Fig. 21, so as to permit the use of heavy feed pressure. If heavy feed pressure were used without first grinding the sharp angles off the lip (called "raking"), the drill would chip severely on the lips. This removal of the sharp angle of the lips, however, must be done with extreme care and judgment, or the drill will have to be reground throughout.

Variations in the hardness of the material drilled can only be met by the skill of the operator and his adjustments of the combination of speeds and feeds. The commercial twist drill is tempered for average conditions—to give good results in a wide variety of hard and soft material. Sometimes specially tempered drills are used on exceptionally hard material, but such drills must be made to order. Their use can be avoided by a skilled manipulation of the speed, feed and lubricant. The harder the metal, the lighter the feed and the slower the speed, forms a rough-and-ready sort of rule that is generally applicable.

Small-Hole Drilling

In drilling holes of small diameter, unless the feed and speed are given most careful attention, the danger of breakage is very great, especially at the moment when the point of the drill breaks through the other side of the work. Particularly is this moment dangerous when hand feed is used, because it is difficult to regulate the pressure applied to the feed lever with any degree of exactness.

In some shops, specializing in the manufacture of wool combs and similar products, thousands of holes of various sizes, running as small as .013 in. in diameter are drilled daily through brass plates 7/16 in. thick. This work is accomplished

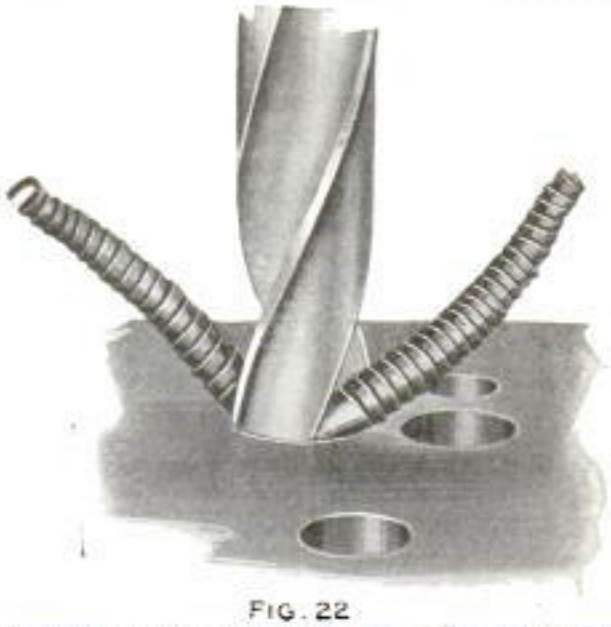

FIG. 22

Properly Rolled Chips; Note How Compactly They Fit within Themselves

Copyrighted material

without difficulty by carefully grinding the drills, honing them on a whetstone, and running them at 20,000 r.p.m. This speed is increased to 30,000 r.p.m., when the holes are .013 in. in diameter. Outside of this particular industry, it is rare to come across a small drilling machine running at more than one-fourth of its proper speed. Therefore, let us urge, when drilling with small drills, rather lean toward too much speed than not enough, and keep the feed light. This decreases the tendency to break the drill and also increases output.

Drilling Brass

Owing to the nature of brass, a heavier feed than for the harder materials may be used, especially in automatic machines, in order to insure the chips having sufficient body to follow the flutes out of the hole. For brass, if any lubricant is used, paraffin oil is suggested. A special drill is made for brass work; when ordering this specify for brass. The form of point shown in Fig. 24 will also be found efficient in drilling soft material such as brass, where the normal point tends to "hog in" or "grab." This applies also to copper, in which the point acts similarly.

Cutting Compound

To maintain the speeds and feeds recommended, it will be found necessary to use some good cutting compound, and we recommend the following, in the order named: for hard and refractory steel, turpentine, kerosene, soda water; for soft steel and wrought iron, lard oil, soda water; for malleable iron, soda water; for brass, a flood of paraffin oil, if any lubricant is used; for aluminum and soft alloys, kerosene, soda water; cast iron should be worked dry or with a jet of compressed air as the cooling medium.

For automatic machines, where the holes do not exceed two drill diameters in depth, and under a flood of lubricant, high speeds and light feeds are especially recommended. When holes are deeper than two drill diameters, it is sometimes difficult to get rid of the chips. A point like that shown in Fig. 21 is especially efficient under these conditions, with slower speed and heavier feed as the bottom of the hole is approached. Always endeavor, in automatic drilling, to get a small, compactly rolled chip (Fig. 22), and if possible keep it unbroken the entire depth of the hole, as such a chip feeds through the flutes most easily. When a drill seems to be drilling fairly well, yet the surface of the hole is rough (Fig. 23), it is an indication that the drill

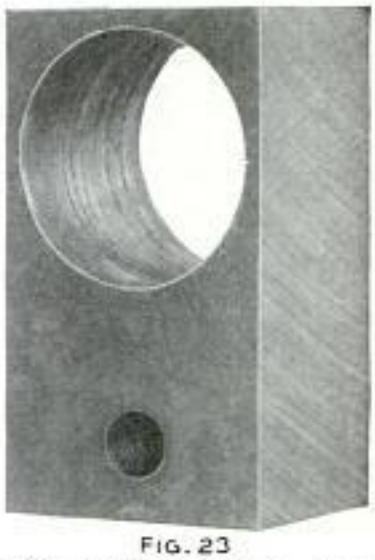

FIG. 23

This Rough Hole Was Made with a Dull Drill

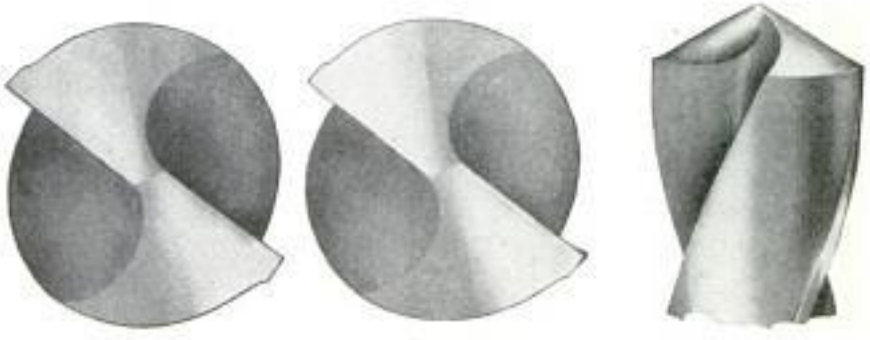

FIG. 24

Drills at the Right and Left Have Been Thinned; the One in the Center Has Not. Below, Convenient Method of Always Having the Proper Drift Handy That Saves Both Time and Drill Tangs

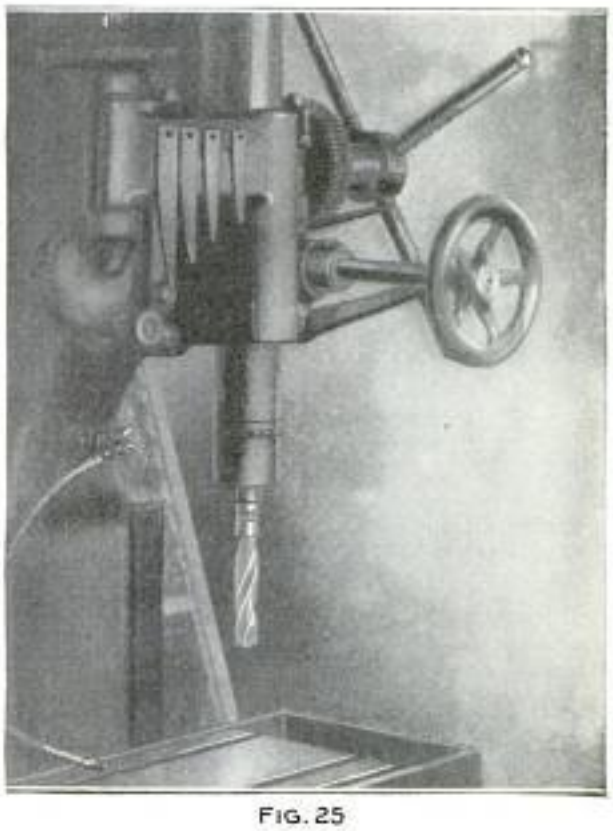

FIG. 25

Copyrighted material

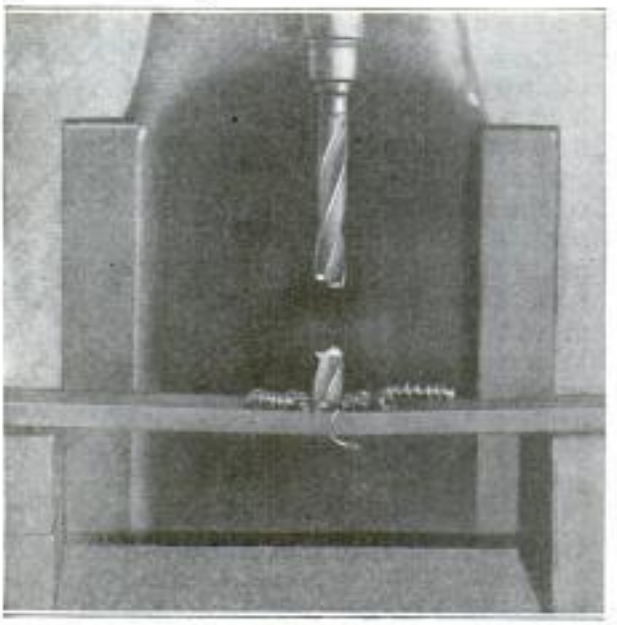

FIG. 26
The Result of Spring in the Work—a Broken Drill

is dull and, therefore, should be resharpened without delay.

Thinning the Point

Drills may be made to feed more easily into the work by a process known as thinning the point. This is an extremely delicate operation, and should not be undertaken except by a skillful operator. It is, however, a decided assistance where the hand feed is used, or where one is using high-speed drills with unusually heavy webs. To thin a point properly, a round-faced emery wheel is necessary, and the drill should look like Fig. 24 when finished. Be very careful, in thinning the point, to keep the dead center of the drill in the exact center, and, also, not to weaken the web too much by running the ground-out section too far up into the flutes.

Common Errors

Broken tangs result from a variety of causes. They may be traced to the use of badly mutilated sockets; of drills the shanks of which are so badly "banged up" that they do not fit snugly in the socket, or of drills with badly mutilated tangs. Although the tang of a drill is designed to carry a portion of the driving strain, the tapered fit between the shank of the drill and the walls of the socket should carry a large share of it. As a result, if either the inner wall of the socket or the surface of the shank is mutilated, a perfect fit is impossible. Under such conditions, the whole driving strain is thrown on the tang. Often the tang breaks from wrong treatment of drill or socket.

Before inserting a drill in a socket, rub the shank to make sure it is smooth and free from grit. Also inspect the inside of the socket to be sure it is in the same condition. In drifting a drill out of the socket, never use anything but a drift (Fig. 25). The use of such makeshifts as files or wedges is likely permanently to injure either the drill or the socket, or both, with broken tangs resulting therefrom. In removing the drill from the spindle or socket, take great care that the point of the drill, or tip, does not hit the table of the drill press or the work. It is well to have a block of wood handy, onto which the drill can drop as it is drifted out.

When inserting a drill into a socket, never use a machinists' hammer, as this dulls the tip of the drill and nicks the cutting edges. Always use a material softer than the drill itself, such as a lead hammer, or a piece of heavy wood.

One of the most common causes of drill breakage is lack of rigidity in the drill press or work. Drill presses that are too weak to resist the feed pressure without springing, either through faulty design of the table or of the feeding parts, and drill presses having lost motion in the spindle, invite drill breakage, because of the sudden release of the resistance to the feed pressure when the drill breaks through the far side of the work. This causes the lips to catch, and the resulting strain is sufficient to break the drill. The same results come about

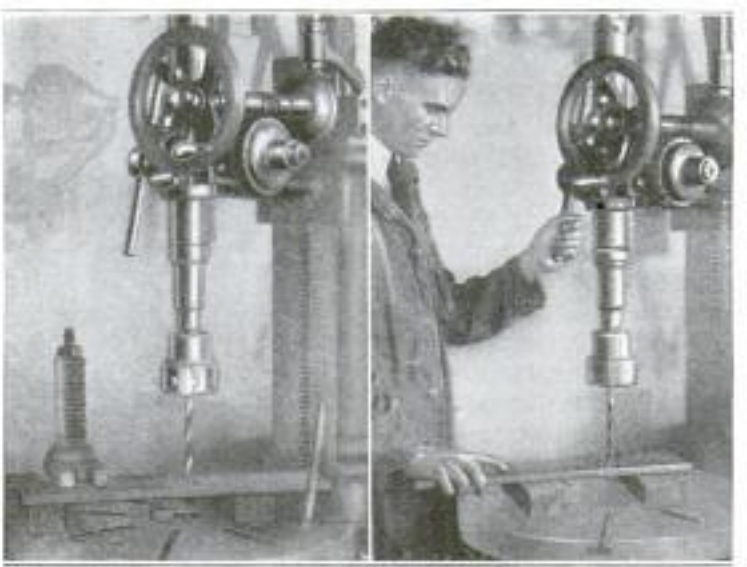

FIG. 27 FIG. 28
Work Should Always Be Clamped to the Table as at the Left, Never Held as at the Right

Copyrighted material

from faulty setting up of the work. Underneath the drill the work should be absolutely rigid and free from spring, otherwise breakage is almost sure. The work should never be held in the hand. It should be rigidly clamped to the table of the press (Fig. 27). If work is held in the hand, the risk of breakage, owing to lack of rigidity and side support, is enormously increased, and the danger to the operator from whirling work is considerable.

It is good practice to warm the cutting lubricant before using it with high-speed tools. Any hard piece of steel is extremely brittle when cold, and high-speed drills should never be put to work in that condition. They operate much better when warm, often giving good results when the chips are actually turned blue by the heat generated. Nothing will "check" (fill full of small cracks) a high-speed drill quicker than to turn a stream of cold water onto it after it has become heated while working. It is equally bad to plunge it into cold water after the point has been heated in grinding. Either of these practices is certain to impair the drill.

A fact often lost sight of, even by experienced users of drills, is that cutting ability and hardness are not the same thing. This is especially true of high-speed drills. The apparent hardness of a drill varies with the composition of the steel, and is no indication of the cutting ability. Some of the best high-speed tools we have ever tested could be filed so readily that, were filing an indication of the work to be expected from them, they would be condemned without a working trial.

A high-speed drill so hard that it cannot be filed may, by exercising extreme care, be made to drill extremely hard material. But such a drill will be found so brittle as to be worthless for softer materials, or where a large amount of work must be done in a given time. Numerous tests have proved that the hardness of files varies quite as much as that of other hardened tools, and this is an-

Feet per Min.	30′	40′	50′	60′	70′	80′	90′	100′	110′	120′	130′	140′	150′
Diameter In	Revolutions per Minute												
1/16	1833	2445	3056	3667	4278	4889	5500	6111	-----	-----	-----	-----	----
1/8	917	1222	1528	1833	2139	2445	2750	3056	3361	3667	3973	4278	4584
3/16	611	815	1019	1222	1426	1630	1833	2037	2241	2445	2648	2852	3056
1/4	458	611	764	917	1070	1222	1375	1528	1681	1833	1986	2139	2292
5/16	367	489	611	733	856	978	1100	1222	1345	1467	1589	1711	1833
3/8	306	407	509	611	713	815	917	1019	1120	1222	1324	1426	1528
7/16	262	349	437	524	611	698	786	873	960	1048	1135	1222	1310
1/2	229	306	382	458	535	611	688	764	840	917	993	1070	1146
9/16	183	244	306	367	428	489	550	611	672	733	794	856	917
5/8	153	203	255	306	357	407	458	509	560	611	662	713	764
11/16	131	175	218	262	306	349	393	436	480	524	568	611	655
1	115	153	191	229	267	306	344	382	420	458	497	535	573
1 1/16	102	136	170	204	238	272	306	340	373	407	441	475	509
1 1/8	92	122	153	183	214	244	275	306	336	367	397	428	458
1 3/16	83	111	139	167	194	222	250	278	306	333	361	389	417
1 1/4	76	102	127	153	178	204	229	255	280	306	331	357	382
1 3/8	70	94	117	141	165	188	212	235	259	282	306	329	353
1 7/16	65	87	109	131	153	175	196	218	240	262	284	306	327
1 1/2	61	81	102	122	143	163	183	204	224	244	265	285	306
2	57	76	95	115	134	153	172	191	210	229	248	267	287
2 1/4	51	68	85	102	119	136	153	170	187	204	221	238	255
2 1/2	46	61	76	92	107	122	137	153	168	183	199	214	229
2 3/4	42	56	69	83	97	111	125	139	153	167	181	194	208
3	38	51	64	76	80	102	115	127	140	153	166	178	191

Above, Model Drill Point That Will Aid in Grinding Drills; Center, Handy Pocket Chart of Feeds and Speeds; Below, Table of Cutting Speeds

Copyrighted material

other reason why file tests are unreliable. No drill that "files" hard or soft should be condemned for that reason alone, but should first be given a drilling test in material of known hardness.

Key to Table

The table of cutting speeds given herewith should be used only as a guide, and the correct speeds for drills should be determined by good judgment applied to each individual case. It is safe to start carbon drills with a peripheral speed of 30 ft. per minute for soft and machinery steel, 35 ft. per minute for cast iron, and 60 ft. per minute for brass, using in all cases a feed of from .004 to .007 in. per rotation for drills smaller than ½ in. and from .005 to .015 in. per rotation for drills larger than ½ in. in diameter. At these speeds, a suitable cutting compound should be used for wrought iron and steel. In the case of high-speed steel, the above feeds should remain unchanged, but the speeds should be increased from 2 to 2½ times. All the speeds recommended are only speeds at which the drilling should be started. They are approximate, and for average conditions only. They can be greatly exceeded under some conditions, but under others they will have to be reduced. In all cases, the operator should be guided by observing the condition of the drill in connection with the suggestions previously given.

The model drill point, shown above the table, will be found especially valuable in learning to grind drills correctly, so as to do more and better work and keep the number of broken drills down to the minimum. The line across the center of the drill point between the cutting edges should be as in the model point. This is of the utmost importance, as an experience of over forty years has proved that 99 out of every 100 drills that split up the center are improperly ground at this point. This model drill point can be obtained from one of the large drill companies for 55 cents.

Below this is another valuable aid for the driller. It is a celluloid disk giving decimal equivalents of fractions, tap and drill sizes and proper speeds and feeds for both high-speed and carbon drills. This costs 25 cents.

Handy Truck for Lumber Yard

A Nebraska lumber company employs a novel, movable derrick to save time in unloading lumber from the cars to the sheds. A spur track from the railroad yards extends along the front of its sheds. A concrete walk provided in the space between the track and the shed, makes a smooth surface over which the truck can be moved. The truck consists of a tapered frame, about 18 ft. high, and is mounted on four iron wheels. The frame carries two planks, one of which has 2-in. holes bored through it every 16 in. and the other similarly bored and notched out as shown, to support a movable roller with a pipe axle at various heights. When a car of lumber is to be unloaded, the truck is moved along until it is in front of the car door. The roller is then adjusted to the desired height; if the lumber is to be stored on the first deck, the roller is set to work best for that height and if the lumber goes overhead the roller is set higher. One man in the car pushes the timbers over the roller into the shed and another man in the shed takes the piece and stacks it. Large timbers weighing between 100 and 200 lb. have been handled without any difficulty in this manner.—Dale R. Van Horn, Walton, Nebr.

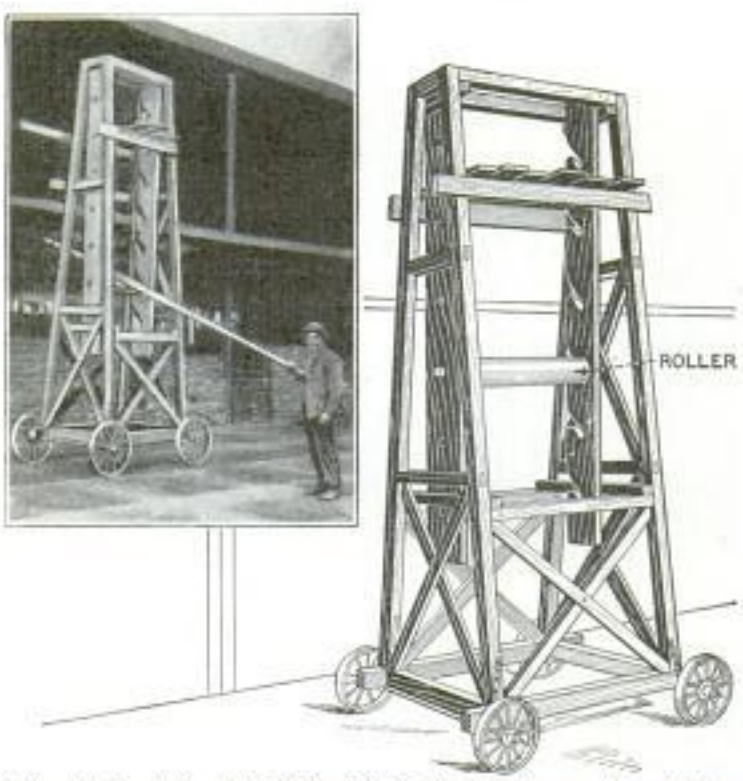

Wheeled Derrick with Adjustable Roller Facilitates Transferring Lumber from Railroad Cars to Sheds

Copyrighted material

Making "Drawings" in Wax

There is a story told of a farmer who went to a machine shop to get a certain part made from a model which he had whittled out of a potato. This, while unconventional, admittedly is good practice from the farmer's standpoint and so are other interesting examples of the "every-man-to-his-craft" expedients that find their way into the shop. Not long ago a machine shop received a wax impression for a clamp used by electrotypers. The customer wanted duplicates but could not spare the old parts, as they were in constant use. The machine shop had done some of the work years before under contract, but had no drawings to refer to; however, duplication from the wax impression was almost as simple as it would have been from prints.

It will be noted that there is a body with a beveled foot that slides in a dovetail slot, a hinged piece with a leather pad at the clamping point, and a screw with a small handwheel. All these were modeled in the wax mold to exact size. The special thread was easily discernible and also the size of the taper pin, the angle of the base, and the fuzz showing the leather. Only the recess in the wheel would not draw from the mold, and this had to be filled in by the "artist." This stunt is an evidence of ingenuity and the possibility of using methods of other trades when customary methods are not available. To make a drawing of this piece would have seemed an almost impossible

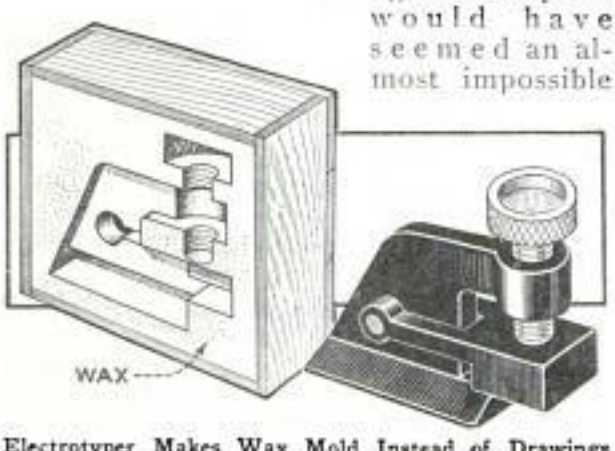

Electrotyper Makes Wax Mold Instead of Drawings of Part to Be Duplicated by Machine Shop

task to the workman in the electrotyping plant, but the molding of wax to show the minutest detail was an everyday affair for him, and therefore it was but natural to make the "drawing" in this way.—D. A. Hampson, Middleton, N. Y.

Turning Eggs in Incubator

Many devices have been invented to turn eggs in incubator trays automatically or with the least possible loss of time to the operator. The egg-rolling belt shown in the illustration, is a simple one, and can readily be installed in almost any standard incubator tray. All that is necessary is to cut an opening in the wire-screen bottom at each end, to accommodate rollers over which an endless belt of mosquito netting is run. The rollers are made of lengths of wooden shade rollers, cut to fit inside of the tray so that the upper part is just flush with the screen bottom. Four small wooden wheels, with strips of rubber cut from old inner tubes glued to the edge are provided under the rollers, just far enough from the edge of the tray to prevent interference with the tray supports. Lengths of No. 10 wire are arranged across the trays, if not already provided, and are strung just far enough apart to allow the eggs to rest in the spaces between them. When the tray is removed from the incubator to turn the eggs, it is only necessary to place it on the table so that it rests on all four wheels, and a slight push then serves to revolve the rollers which operate the belt causing all the eggs to be turned over at once.

Endless Belt in Incubator Turns All Eggs at Once

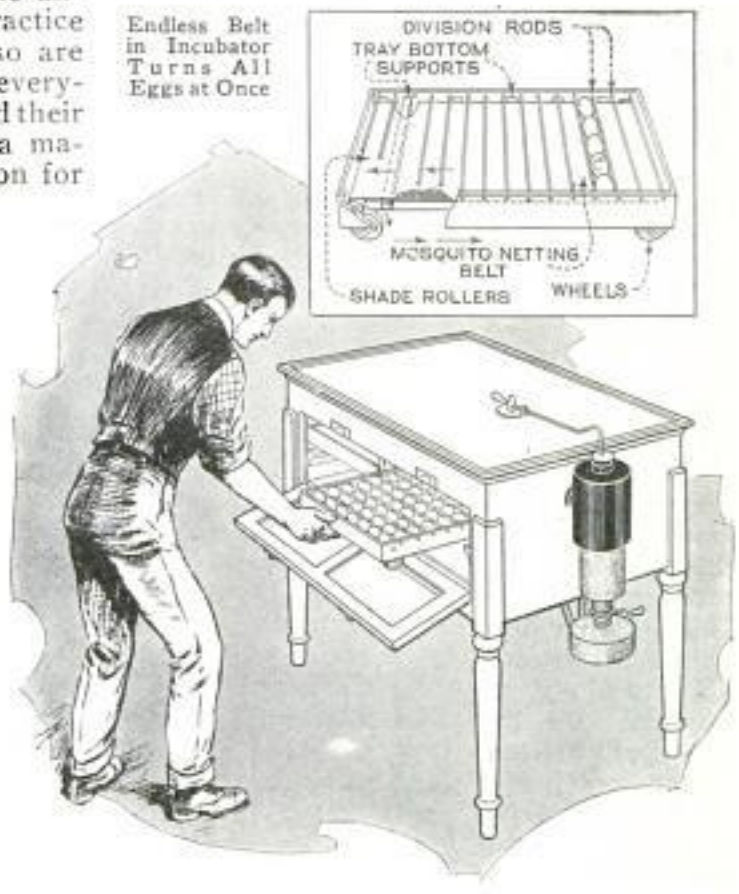

Copyrighted material

Surface Grinding in the Lathe

By H. H. PARKER

AN extemporized lathe surface-grinding attachment is one way in which a small shop that is not equipped with planer or shaper may often turn out fairly good work which otherwise would be very difficult, if not entirely impossible, to accomplish.

A stock motor of from ⅛ hp. up, or preferably one of the portable-grinder type, of high speed and proportionately greater power for its size, is mounted on a hardwood or metal base which in turn is bolted to the lathe toolpost block or cross slide. The work is either held clamped between centers, and blocked to prevent turning, or is bolted to special brackets attached to the lathe bed. In general, the face of the work to be ground is vertical and a cupped wheel attached direct to the motor shaft is brought up against it and traversed by the longitudinal carriage feed, either by hand or power. By using a special base, to be described later, which allows slight vertical adjustment of the grinding wheel, it would be possible, in some cases, to use a plain wheel. The motor would be blocked up until the face of the wheel was over the surface to be ground, which here would be horizontal instead of vertical, and almost touching it. Then the vertical adjustment would be set so that the wheel started to cut, clamped, and the wheel traversed over the work.

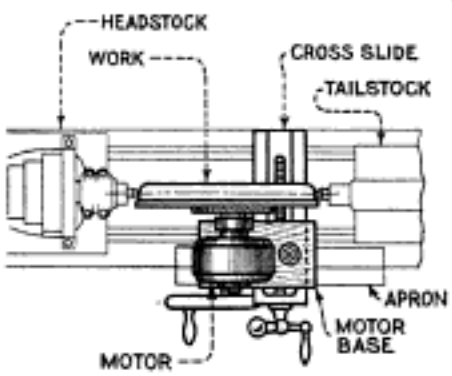

LATHE WITH MOTOR AND CUP GRINDING WHEEL MOUNTED ON CROSS SLIDE.

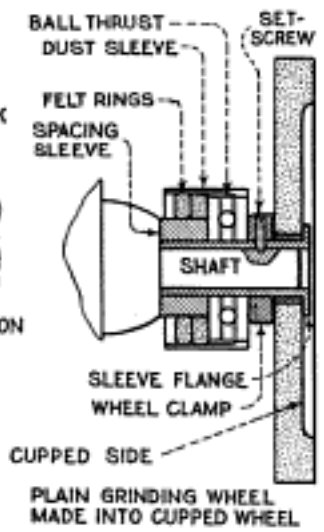

PLAIN GRINDING WHEEL MADE INTO CUPPED WHEEL

The accuracy of this kind of grinding depends upon the fitting of the cross slide; any play here would be transmitted to the wheel and work, unless very light cuts were taken. But to a much greater extent, accurate grinding requires good motor bearings, for a small high-speed wheel is sensitive to any play in the bearings. Hence it is best to use a new motor for this work, or else fit new bearings to an old one, unless the bearings are in perfect condition. While it is possible to turn out fair work with an old motor, the wheel is extremely likely to "dig in," and cut hollows in the surface.

One of the illustrations shows how a plain grinding wheel may be made into a cupped one and attached to the motor shaft. If the motor is of the stock type, the wheel should be of as large diameter as possible, as even then the speed will be rather low; nevertheless, good work can be done, though the wheel may wear more rapidly. The wheel is chucked in the lathe, rotated at low speed and the side hollowed out, leaving a narrow projecting edge around the circumference. If one of the patent abrasive-stick dressers is at hand, this can be used; otherwise an old square file can be used to hollow out the wheel.

A steel sleeve, with a thin flange at one end, is then turned up to fit over the motor shaft, its outer diameter being the size of the hole in the wheel. The end flange is thin enough so that the wheel face will overhang it and allow a considerable amount of re-dressing; the wheel is clamped to the sleeve by a nut, threaded on from the back and holding it against the front flange; blotting-paper washers must be placed between flange and nut and wheel. Next a stock ball-thrust bearing is slipped on behind the clamp nut and over the sleeve, and then a spacing collar, to bear against the motor bearing housing. As the abrasive dust would ruin the ball bearing, this is protected by a housing made of brass or steel tubing, driven over the outer bearing plate, but relieved inside to clear the remainder of the thrust assembly. Some felt packing rings between housing and spacing collar will help keep out the grit and dirt. The whole is attached to the motor shaft by a setscrew through the clamp nut and sleeve.

In connection with the foregoing, a method of grinding and fitting a cast-iron 60° V-slide might be of interest, as an ex-

Copyrighted material

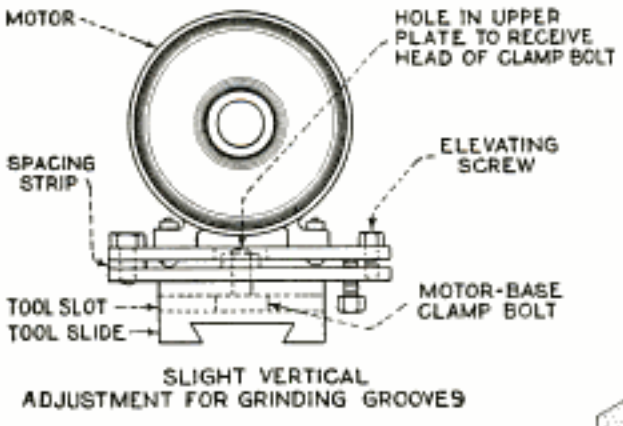

ample of an actual job. No planer or miller being available, the casting was finished complete in the lathe by grinding, following the ideas described above. A cupped wheel was used to grind the face of the slide, the casting being held between centers with this face vertical. One V-guide had been cast with the V roughly at 60°, the other guide being bolted on later, so that its seat was ground to a plane surface. In order to grind the bottom V-groove at the same time as the face, the wheel was dressed back to a 60° angle. The motor was mounted on two steel plates, separated at one end by a steel strip and bolted together. Two adjusting bolts at the other end, one a stop bolt, served to spread the plates apart or bring them together, thus giving a certain amount of vertical adjustment to the grinding wheel. The lower plate was bolted to the cross-slide slot, a hole being drilled in the upper one to accommodate the head of the clamp nut, the square head of which fitted into the tool slot.

In grinding the casting, the wheel was first traversed across the face without cutting much in the V-groove. Then the motor was lowered slightly and a cut taken with the angular face of the wheel, into the groove, at the same time taking a further light cut across the face of the casting. Before making the finish cut, the angle of the groove should be tested and if not correct, the wheel face dressed off, a light cut taken, the groove tested again, and so on until satisfactory. The upper guide strip, which was of cast iron, but which could have been made of steel stock, was centered in the lathe and the bottom ground off, then swung around 60° and its angular face ground and tested, rotating it slightly and taking light cuts until the angle was found correct.

A rather novel method of clamping the guide, and at the same time making it serve as its own gib, is shown. The bolt holes in it were slightly elongated, while those in the casting itself were tapped and steel studs screwed in, these studs being locked in place by nuts screwed onto their

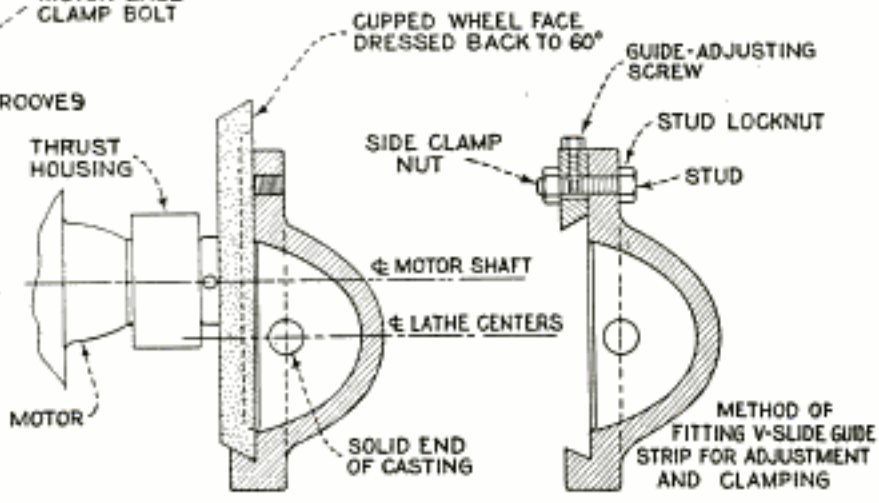

rear ends. Nuts on the other ends of the studs clamped the guide strip in place. Holes were then drilled through the edge of the strip for adjusting screws, which were tapped into the studs. Thus, by loosening the clamp nuts slightly the adjusting screws could be turned and would draw the guide in; when set correctly, the clamp nuts would be tightened.

Flat-Iron Bench Supports

Casting the iron legs for their benches is the method usually adopted by large shops, but where only one or two benches are needed this would not pay. Possibly one of the best and cheapest constructions in the latter case is to make the legs of flat iron, as shown in the illustration. Any kind of ¼ or ⅜-in. strips can be used for this purpose; they are riveted together securely and the feet drilled for screws with which they are fastened to the floor. The entire end support is made up of five lengths.

Copyrighted material

Cutting Heavy Sheet Metal

A sheet-metal shear that will cut 16-gauge or heavier iron, can seldom be found in the small shop. When it is necessary to cut metal of such thickness, it can be done by using a heavy block of iron and a large file with the teeth ground off smoothly near the end, as follows: The file is placed over the edge of the block, so that it will have a shearing action, and is then driven through the metal with a heavy hammer as shown in the illustration. An additional advantage of this method is that pieces can be neatly cut out in the center. A smooth, clean-cut edge can be made in this way, which is not possible with a cold chisel.—H. E. Barber, Fowler, Colo.

Making Printers' Type and Rule

There are more effective ways of making needed wooden type in a print shop than by whittling them from the end of a pine box. One of these consists in cutting either the individual letters or words from some thin material and mounting them on a wooden base, the two together being made type high. This is far more easily done than cutting the letters from hardwood, though, of course, not so substantial. Linoleum of the "battleship" variety is one of the most satisfactory materials for this purpose as the design may be drawn directly upon it. The letters are cut out and fastened to their mounting with shellac or rubber cement. Even thick cardboard can be used in this manner, if it is given several coats of thin shellac after it has been mounted.

Those who can work in hardwood may simplify the task as follows: Get some thin paper, and after drawing the design on it, paste it onto the wood, face down, with rubber cement, which will not cause the paper to wrinkle and buckle as paste or mucilage does. Proceed to bring the letter into shape with a sharp knife. Be sure to lean the cut outward, or away from the edge being cut. A narrow chisel can be used for removing the superfluous wood between the edges, although successive stabs with a knife will do in the absence of a chisel. Several letters may be made upon the same piece of wood and then separated with a saw.

In place of drawing the letter on thin paper, the freshly printed letters from a poster may be cut out and transferred to the wood. Hold the printed letter on the wood, lay a piece of stiff paper over it and rub the back of the latter with the rounded edge of a bottle or similar smooth, hard article. If the ink on the copy is too dry, moisten the back with turpentine. Heavy rules and borders for posters can be made by laying out two rows of ordinary pica black-face linotype rule, the sort with a heavy full-face black line. Take a file and make irregular notches on top of one and bottom of the other. When the two pieces are put together a heavy double-pica rule of odd design is obtained.—H. R. Calhan, San Francisco, Calif.

Auto-Coil Tester

Testing of Ford ignition coils is almost necessary to determine whether they are in proper condition. One of the simplest methods of doing this is shown in the illustration. The testing device consists of a wooden panel with two brass strips, one of which is fitted with a small adjusting screw. The panel is about 6 by 8 in. and is fitted with a stop block on the top, while the two blades are screwed to the bottom. One blade bears against the bottom contact of the coil, while the other rests against the upper contact. The adjustable screw on the latter can be turned down against the lowest contact on the side, which is one of the high-tension terminals. A 6-volt battery can be used to supply current. The coil to be tested should show a spark of ¼ in. at the adjusting screw, if it is in good condition.

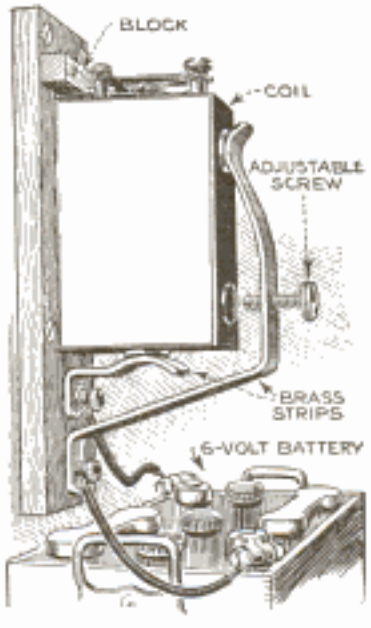

Copyrighted material

Q. My storage battery will no longer take a full charge. What is the reason for this? A. When a storage battery fails to take a charge, it is an indication that it needs to be overhauled at a battery station.

Q. Will a five-tube neutrodyne receiver tune sharper on a short aerial than a long one, my aerial is now 125 ft. long? A. You will be able to tune sharper on a short aerial than a long one. There would probably be slightly more volume on the long aerial, but you will have more difficulty in separating the stations.

Q. Will a tube detector work better in my reflex set than the crystal? A. A crystal makes the best detector for this type of circuit. This is due to the fact that the circuit is designed for a crystal detector for several good reasons, the most important being that the crystal acts as a stabilizer of the reflex stage. This is a critical adjustment, and the use of a tube with entirely different constants will destroy the balance which is necessary in this type of circuit.

Q. Can I add another stage of radio-frequency amplification to my five-tube neutrodyne receiver? I would also like to use a loop with this set; would it be practical? A. It is possible to add another step of radio-frequency amplification but it is unnecessary, and the addition of another step would mean another control knob. A loop used with this type of receiver tends to interact with the neutroformers, and its use is not advised. A loop could be used if the entire set was shielded, but this also would tend to destroy the efficiency of this type of receiving set.

Q. I have heard that I could use my desk phone as an aerial. How can I do this? I do not expect to get distant stations, but would like to use this method for local stations, as I cannot use an outside aerial on this building. A. This is a very simple matter; all that you need is a small tin pan or sheet of No. 26 gauge brass, 6 in. square. Place the pan or metal sheet under the desk phone and use a bulldog clip for fastening the wire from the metal sheet to the aerial post on your set. Use an ordinary ground to a water pipe. You will obtain even better results if you use a small variometer in series with the lead to the aerial post. (Fig. 1.)

Fig. 1

Q. I have a one-tube regenerative set that howls and whistles constantly; how can I remedy this? A. If your set is hooked up correctly, your trouble lies in either a defective tube, or B-battery. You may be using too long an aerial.

Q. I am getting excellent results with my receiver on the first step of A.-F. amplification, but when I use the second step, the volume is great but the signals fuzzy, especially on the higher notes. How can I remedy this? A. This is often the case, especially if more than two steps of A.-F. amplification are used. To clarify the signals try placing a .00025 fixed condenser across the secondary of the last transformer, also try a .0005-mfd. condenser. Another method is to place a grid leak across the primary of this transformer. (Fig. 2.)

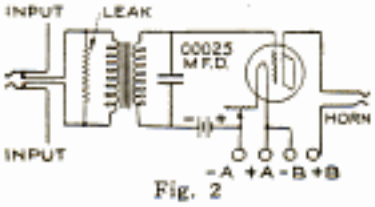

Fig. 2

Q. I have built the Superheterodyne Eight, and am getting good results but would like to experiment with an outside aerial. How can I use an outside aerial with this set? A. You can use a small indoor aerial or an outside aerial with this receiver if you wind two turns of loop wire around the outside of your loop, connect one end to the aerial and the other end to the ground; this gives you an untuned aperiodic aerial which will function well with this type of receiver. The method of winding is shown in Fig. 3.

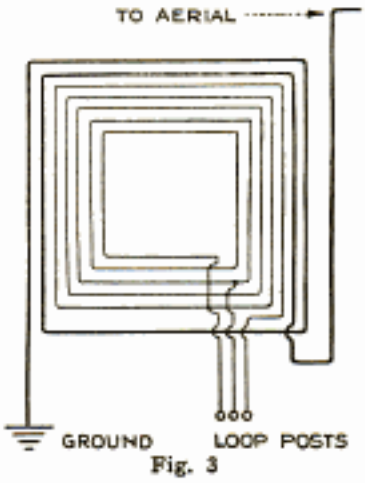

Fig. 3

Q. I have noticed a peculiar effect with my loop. I am using a 13-turn loop on a Superheterodyne Eight receiver. There are some places in the room where this loop can be placed where it will lose its directional effect; what is the cause of this? A. For best results place the loop where it is free to rotate, and comes not nearer than six or eight feet to metal objects of any size, such as steam radiators, bed springs, metal roofs, or lead-in wires. In such cases these articles also pick up some of the energy, which would otherwise pass to the loop, and cause the loop to lose its directional properties.

Q. Why is larger wire used in primary coils than in secondary coils; why not use the same size? A. Heavy wire for primary coils is necessary because the currents flowing in the primary circuit are much more feeble than those flowing in the secondary circuit, and the large wire is necessary to conserve the weak impulses.

Q. Which makes the best connection, two wires merely touching each other and soldered, or should one wire be bent around the other before soldering? A. Solder is for the purpose of holding the joint together, and is not for the purpose of making a good electrical contact. A good electrical contact should be made first, with a pair of wire-bending pliers, then use just enough solder to preserve the good contact already made.

Q. I have a two-tube receiver consisting of a detector and one step of audio-frequency amplification. Would you advise me to add one stage of radio frequency, or another step of audio frequency. Which will give me the greater volume? A. Adding one stage of radio frequency to the receiver is a waste of time and material; you would get no increase in volume. Add another stage of A.-F. amplification, if you wish more volume.

Q. I have a five-tube neutrodyne receiver; it works very well on local stations, but I often get a crackling sound on long distance. Is this due to the batteries or a defective part? A. The trouble is not with the batteries, or you would hear the noise at all times. When

Copyrighted material

tuning for long-distance stations you are amplifying static which is not noticeable on the local stations.

Q. Is it necessary to use a C-battery with my three-tube receiver? I am using a regenerative circuit, with two steps of A.-F. amplification. A. It is necessary

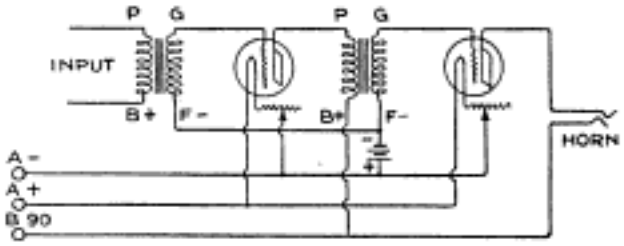

Fig. 4

to use a C-battery on most sets to obtain perfect results. Some circuits work satisfactorily without the C-battery, but reception is always improved when it is added. The diagram, Fig. 4, for connecting the C-battery is given.

Q. I have 2 All-American R12 A.-F. transformers and note that the grid and plate posts are reversed from position shown in the circuit diagram of the Superheterodyne Eight described in the Feb. and March issues of this year. Is this an error or has the transformer been changed? A. The manufacturer changed the terminal plate about the time this circuit was published. Mount the transformers so as to allow for shortest possible grid and plate leads.

Q. I have three honeycomb coils and enough other apparatus to build a three-tube receiver. Please send me a good diagram for a three-coil regenerative set. My coils are 25, 35 and 75 turns. A. This circuit is shown in Fig. 5. We suggest that you experiment with coils varying in number of turns in different positions, also with aerials of varying length for best results. The aerial should be at least 100 ft. long. Try two 50-turn coils as primary and secondary, and a 75-turn coil for the tickler.

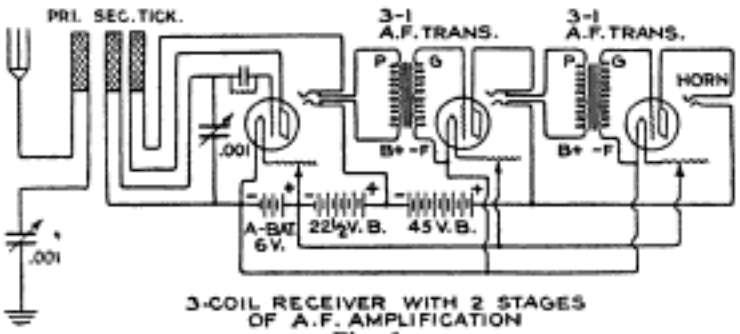

3-COIL RECEIVER WITH 2 STAGES OF A.F. AMPLIFICATION

Fig. 5

Q. Please give me the correct grid-leak values for tubes, UV-201A, DeForest DV-6, WD-11 and 12, UV-199 and 200. A. The approximate values are as follows: UV-201A or C301A, 2 to 3 meg.; DeForest DV-6, 3 meg.; WD-11 or 12, 3 to 5 meg.; UV-199 or C-299, 3 to 5 meg., and UV-200 or C-300, 1 to 2 meg.

Q. I have a three-coil receiver, using three honeycomb coils. I have tried coils of different number of turns but cannot tune to the lower wave lengths. I am using one 23-plate condenser and one 43-plate condenser. What can I do to make the receiver tune to the lower waves? A. To lower the wave length of your three honeycomb coil set, use a 43-plate variable condenser in series with aerial.

Q. I am using a B-battery eliminator with my five-tube neutrodyne receiver; it is operated from the 110-volt a.c. lighting circuit. The directions state that if a drumming sound is heard, reverse the plug in the light socket to change the polarity. I have done this but still the set does not have good tone, and is extremely critical. The set is not at fault as I get good results when I change back to my old type B-battery. Will you please tell me what is the trouble? A. It is sometimes necessary to remove the ground wire from your set, or reception will not be clear. The lighting system forms the ground for your set.

Q. I notice in several radio articles it is mentioned that the detector tube should be in the positive lead; other diagrams show the detector in the negative lead as well as in the amplifiers. I wish to use UV-201A tubes; which connection is right? A. It makes no difference whether the detector tube is connected to the positive or negative lead of the rheostat. For the amplifier tubes, however, it is necessary that the negative lead of the rheostat should be connected to negative F of the socket.

Q. I am using a five-tube neutrodyne, and have had quite a little trouble with signals from distant stations fading. The signal will almost die away entirely then come back strong. What causes this? Is the set at fault or is it a natural phenomenon? A. Fading is seldom caused in the set. It is often due to atmospheric conditions, not local. It is also caused by detuning effect from some neighbor's set. Swinging of the aerial in the wind is another cause, especially if the aerial swings close to some metal object such as a gutter or downspout.

Q. I have a six-tube receiver consisting of three stages of radio-frequency amplification, detector, and two steps of audio. I get good results, but it seems not to be as loud on the horn as it should. With the head phones the volume is terrific. Could you suggest the cause of the poor horn volume? A. Strong signals often throw the horn out of adjustment. As soon as this critical adjustment is lost, poor results follow. Check up the speaker unit, and see that you have the correct polarity.

Q. The children turned up all the rheostats on my set and now the music comes in very faintly, although all the tubes light. What is the trouble? A. The tubes have been burned at too high a temperature with the result that their filament emission properties have been exhausted. You will probably have to get a new set of tubes.

Q. What is the best form of terminal to use on instruments, binding posts or soldering lugs? A. All wires should be attached to instruments with soldering lugs. Some manufacturers are abandoning binding posts and equipping their instruments with attached lugs only.

Q. What is the proper kind of wire for winding coils, silk or cotton-covered? A. We recommend the use of silk-covered wire in preference to the cotton-covered type.

Q. What size rheostats should be used for UV-199 tubes in groups of two and up to six; and for UV-201A tubes in the same groups? A. You can use 20 to 25-ohm rheostats for each pair of tubes, three rheostats for the six tubes of either type.

Q. I am building a crystal receiver, and wish to make my own variometer. How many turns shall I use on the stator, and how many on the rotor? A. Use 60 turns of No. 22 dcc. wire on the stator and 60 of No. 24 dcc. wire on the rotor.

Q. What material do you consider best for shielding? I am building a nine-tube receiver and wish to thoroughly shield it. A. The type of shielding material to use depends on the manner in which it is to be used. Heavy tin or aluminum foil is best for shielding the front panel; this can be put on with shellac, and is easy to cut for instrument clearance. No. 26 brass sheet makes a good shield for inter-tube and inter-transformer shielding. Copper sheet or screen makes an ideal lining for shielding the cabinet. Shielding should be grounded.

Q. I have a hookup I wish to build using three UV-201A tubes; how can I use dry cell tubes with this circuit? How do I connect the dry cells and how many cells must I use with three UV-199 tubes? A. You can use the dry-cell tubes if you wish although you will not get as much volume. Use two dry cells for each tube and connect them in series-parallel as shown in diagram. (Fig. 6.)



Fig. 6

Copyrighted material

—and then YOU will share their pride in this Saw

YOU can still buy a hand saw that is the personal product of a craftsman's hands—and in which you can take a craftsman's pride.

Though the world's greatest saw works is alive with modern machines —many of them invented and built here in the Disston plant—

The fame of "The Saw Most Carpenters Use" rests square on the skill of the Disston workman.

—

Henry Disston's first saws won their way on workmanship.

And so, when your Disston Saw makes hard work easy, you are getting a result that generations have worked to give.

What to expect of your Disston

The springy, tempered Disston Steel blade that holds its keen edge so long—

The true, clean, easy cutting that is so quickly done—

The balance and swing that make it seem a part of your arm—

These are the things that Disston sawmakers, aided by improved methods and modern machinery, work into the Disston Saw.

—

Go to the nearest hardware store. Take a Disston Saw in your hand. Read the promise etched on its shining blade.

Test that promise in use.

Try this saw on hard wood or soft, rough or fine work, for speed, ease and clean cutting.

Then you will understand and share the pride of the men who make the Disston Saw!

Henry Disston & Sons, Inc.
Philadelphia, U. S. A.

Hardware dealers the world around sell Disston Saws, Tools, and Files

DISSTON

Copyrighted material

Who owns the telephone?

For seven carefree years young John Graves worked in the car shops at Orenville, spending his dollars as fast as he earned them. Soon after his promotion to foreman, he was married and moved to a little white house on Orchard Avenue. Life was happier than ever, but spare dollars were not more plentiful, especially after a third member was added to the family.

Then came a day when the plant superintendent showed John the wisdom of saving a part of his earnings, for the satisfaction it would bring, and for protection against emergencies and old age. He and his young wife, for the first time, learned the difficult art of economy, and finally they came to know the joys of saving and of safe investment.

Today John Graves, and many thousands like him, own the stock of the American Telephone and Telegraph Company. This company is owned by more people than any other, and the great majority of its owners —laborers, clerks, housewives, business men and others—have bought it with their savings. As its business has grown, the number of its shareholders has increased until now one out of every 45 telephone subscribers is also a stockholder.

AMERICAN TELEPHONE AND TELEGRAPH COMPANY
AND ASSOCIATED COMPANIES

BELL SYSTEM

One Policy, One System, Universal Service

Copyrighted material

He's drilling out a broken rivet on a steering column with a "Yankee" Ratchet Hand Drill. Thanks to the "Yankee" DOUBLE Ratchet he can work in the easiest position, as only a slight to and fro movement of crank is needed to make the drill cut continuously.

Save the flying minutes

Repair shops know they can't waste time and make money. That's why they use the "Yankee" Hand Drill No. 1530 for light drilling jobs.

In places where ordinary drills won't work, it quickly drills clean, accurate holes. No need to tear down construction.

When set at DOUBLE Ratchet, the slightest movement of crank makes drill cut continuously.

"YANKEE" Ratchet Hand Drill No. 1530

Though a midget in size, it has every ratchet adjustment of the big "Yankee" Breast Drills and Hand Drills. Five in all—Plain Drill, Left-hand Ratchet, Right-hand Ratchet, DOUBLE Ratchet and Gears Locked. Weighs only 1¼ lbs. Measures only 10½ in. long.

May we send you this FREE Tool Book?

You'll be interested, we know, in seeing all the "Yankee" time and labor-saving tools. Write for FREE Tool Book!

Some other "YANKEE" Tools

Ratchet Breast Drills
Ratchet Tap Wrenches
Ratchet Screw-drivers
Spiral Screw-drivers
Automatic Push Drills
Ratchet Bit Brace

"Yankee" on the tool you buy means the utmost in quality, efficiency, and durability.

Dealers Everywhere sell "Yankee" Tools

NORTH BROS. MFG. CO., Philadelphia, U.S.A.

"YANKEE" TOOLS

Make Better Mechanics

Copyrighted material

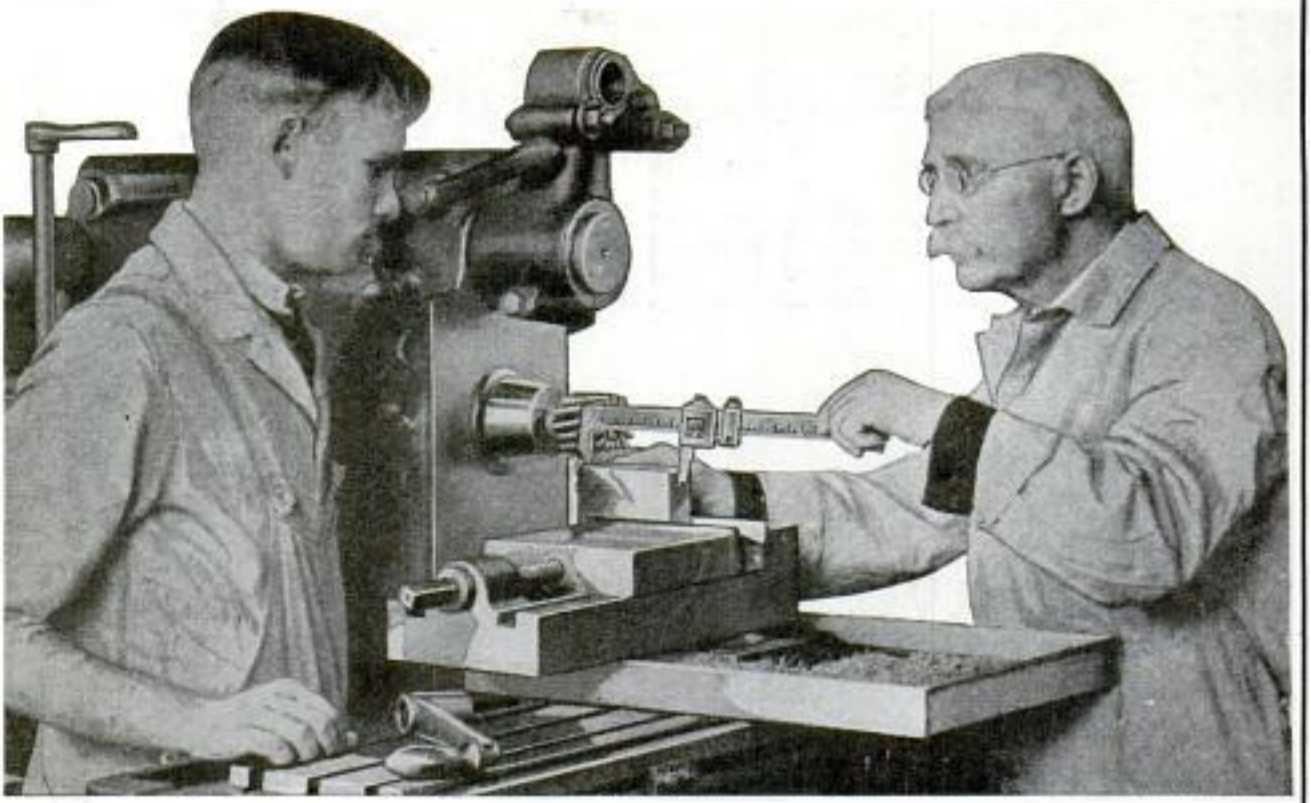

"I've *used* all makes of tools, but there's only *one* kind I *own*"

In every machine shop can be found a man who is the acknowledged master mechanic of the shop. A life lived in handling all kinds of machines and tools has brought to him exceptional skill and a remarkable knowledge of the tools he uses. Thoroughly acquainted with mechanical equipment, he invariably insists that his tools bear the name "Brown & Sharpe."

It pays to take the advice of men who know. Build up your kit with Brown & Sharpe Tools.

Send for Small Tool Catalog No. 29.

BROWN & SHARPE MFG. CO.
PROVIDENCE, R. I., U.S.A.

Brown & Sharpe Tools have helped the skill of mechanics for over three generations

BROWN & SHARPE TOOLS

"Standard of the Mechanical World"

Copyrighted material

One Dollar

YOU know how little a dollar buys nowadays. Do you want to see how much a dollar really *can* buy?

Ask your dealer for a Dollar Topkis Union Suit.

You'll get fabric like in higher-priced union suits.

Roomy fit, that lets you exercise or relax, with perfect freedom of action.

Conscientious tailoring! Reinforced wherever strain comes. Button-holes strongly made. Fine pearl buttons sewed on to stay.

Ask *your* dealer for Topkis.

Write for free illustrated booklet.

TOPKIS BROTHERS COMPANY
Wilmington, Delaware
General Sales offices:
93 Worth St., at Broadway, New York

Topkis Men's Union Suits, . . $1.00.
Men's Shirts and Drawers, 75c each.
Boys' Union, Girls' Bloomer Union,
Children's Waist Union Suits, 75c.
In Canada, Men's Union Suits, $1.50.

Get a box of Topkis. Six suits, freshly packed by the maker, for only six dollars. Look for the Topkis label.

TOPKIS

Athletic Underwear

Copyrighted material

Why Buy 7 Tools When 1 Will Do The Work

Combination Square No. 94

Seven tool uses combined in a single handy accurate tool! That's the famous Starrett Combination Square. The Head, containing a Level, slides freely along the blade and can be entirely removed or instantly clamped at any point. This tool takes the place of a Marking Gage, Rule, Try Square, Miter, Depth Gage, Height Gage, Level and Plumb. Blade is graduated 8ths and 16ths on both sides. Lines and figures are deep cut and very distinct.

The Combination Square takes up but little room in the tool box or on the bench and is easily slipped under the belt when out on a job. You'll use it for Checking, Scaling Blueprints, Laying Out difficult work and in a hundred and one different ways. One week after it's yours you'll wonder how you ever got along without it.

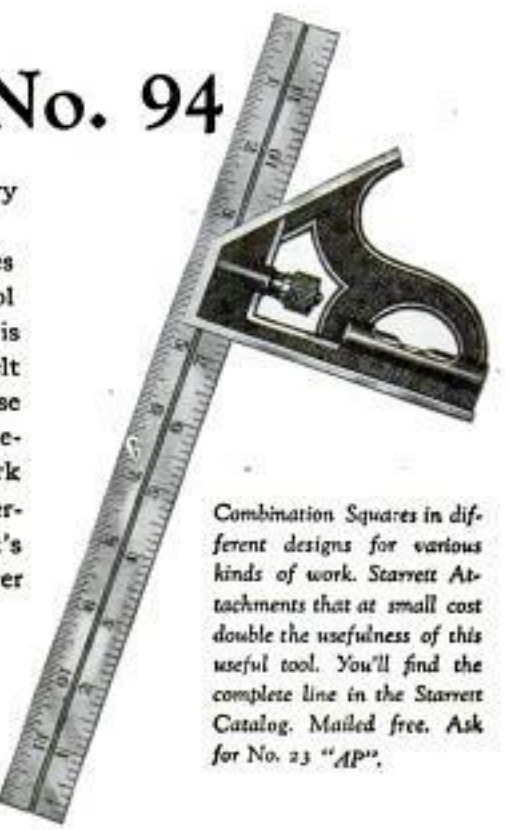

Combination Squares in different designs for various kinds of work. Starrett Attachments that at small cost double the usefulness of this useful tool. You'll find the complete line in the Starrett Catalog. Mailed free. Ask for No. 23 "AP".

THE L. S. STARRETT CO.
World's Greatest Toolmakers
Manufacturers of Hacksaws Unexcelled
Steel Tapes—Standard for Accuracy
ATHOL, MASS.

Copyrighted material

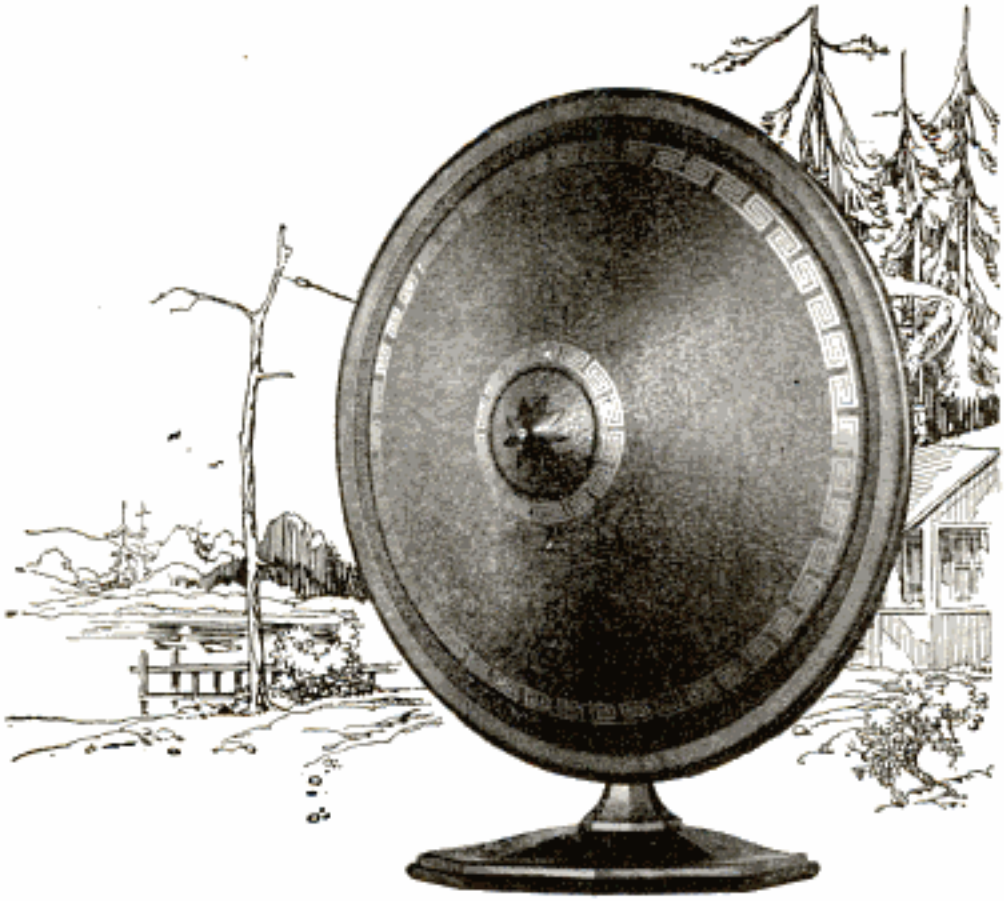

The Crosley Musicone

a startling improvement in looks and tone over loud-speakers
Already replacing thousands

In camp or home, this remarkable development of radio reproduction will greatly increase your delight in radio.

It is a new idea. It diffuses the sound. Upon hearing it for the first time one is at loss to locate the source of the music. Its perfection of reproduction is uncannily real.

Its price, like all Crosley products, is very low because of the half-million production plans under which it is being built. Hear it at all Crosley dealers now.

Crosley owns and operates station WLW, Cincinnati, the first remotely controlled super-power broadcasting station.

Crosley manufactures receiving sets which are licensed under Armstrong U. S. Patent No. 1,113,149, and priced from $14.50 to $65, without accessories.

The Crosley Radio Corporation
Powel Crosley, Jr., President
715 Sassafras Street, Cincinnati

$17.50
Add 10% West of Rocky Mountains

CROSLEY
Better~Costs Less

The Marvels of Radio!

Incredible to those who don't know!



The Crosley 1-Tube 50

Crosley's development of the famous Armstrong regenerative circuit enables you to "roam" the country and enjoy the thrill of picking up distant stations just as though you owned a multi-tube set,—all with one tube and at $14.50, without accessories.

2-Tube Crosley 51

Same as wonderful Crosley 50 with additional tube amplifier. Local and nearby stations on loud-speaker always and distance up to 1500 miles under average conditions. Much greater range with head phones. $18.50, without accessories.

3-Tube Crosley 52

A larger set for those who want greater reception range on the loud-speaker. Operates on three tubes, using wet or dry batteries. Consistent loud-speaker range 1500 miles or more. $30, without accessories.

The Crosley Trirdyn Special

3 Tubes do the work of 5

A unique circuit combining tuned radio frequency, regeneration and reflexed amplification that equals in results the work of 5 and 6 tubes. None re-radiating. $65 without accessories.

Copyrighted material

2½ Tons Heats 5 Rooms!

"There is no heater to compare with the Bulldog. I burned 2½ tons of coal last winter and heated five rooms and bath." —Walter Geary, Gloucester, Mass.

That's what the Bulldog does with coal! Here's what it does with about the lowest grade fuel you can think of!

"I can run my Bulldog furnace steady for fourteen days in normal weather conditions **on the actual cost of fifty cents."** So writes F. R. Redetzke, of Cleveland, North Dakota, and he adds: "Hard to believe, is it? That's what some of our neighbors thought until I showed them! We have an unlimited amount of grain screenings in this country. That's the fuel I am using."

If you are even thinking of a pipeless furnace, or any furnace, write for our free catalog. The Bulldog is one furnace you MUST investigate. Comes completely erected. Fits any height of basement and you install it yourself.

No Money Down

The Bulldog is sent for free inspection

Then, if satisfied, you make only small monthly payments at our amazingly low price. Factory connections in both East and West. We ship from nearest point. Don't consider buying any furnace until you find out about the Bulldog. Write at once for our special offer and our free catalog together with the wonderful record of Bulldog success. Mail this coupon today.

Babson Bros.

19th and California Ave., Dept. B-135 Chicago

Without obligating me in any way please send me your free catalog and special offer on the Bulldog Pipeless Furnace.

Name.....

Address.....

Drive This Beautiful Raceabout Instead of your OLD FORD

Choice of Four Colors; Flat or the Bullet Nose Radiator Shell. Send for 1925 Free Catalog of New Auto Acces', Bodies and Speed Equipment. **Direct from Factory.**

AMERICAN TOP AND BODY CO., Park Ave., DELPHI, IND.

Largest Selling Transformers in the World

$25.00 a DAY CLEAR SURFACING FLOORS

Write Quick for Details

Scores of inexperienced men whom we started as American Universal Floor Surfacing Contractors are making up to $10,000 a year in this wonderful, new, uncrowded field. Electrically driven American Universal Machines do 500% more work and 100% better work than most expert hand scraper, and earn six men's pay. Work is plentiful, fascinating, immensely profitable. Experience unnecessary. Small amount starts you. We furnish everything, teach you, help you succeed. Opportunity of lifetime to be your own boss and make big money.

AMERICAN FLOOR SURFACING MACHINE CO.
523 So. St. Clair St. TOLEDO, OHIO

Copyrighted material

Ride the Thrill Trail!

MILES FROM TOWN, winding through the cool countryside, skirting lakes and streams — there is a Thrill Trail waiting for you and a Harley-Davidson.

No parade of crawling cars for you! Along quiet side-roads, down leafy lanes, through bowered by-paths the Thrill Trail lures you — while your swift Harley-Davidson whirls away the miles.

Let your Harley-Davidson dealer take you over the Thrill Trail — free. Learn the joys of riding a 1925 "Stream-Line" model — more comfortable, faster and better than ever, with even lower upkeep. And ask him about his Pay-As-You-Ride Plan.

HARLEY-DAVIDSON MOTOR CO.
Milwaukee, Wisconsin
Dept. P.

Harley-Davidson
The Motorcycle

Money-making sales opportunities in open territories. Ask us how others have made big successes selling Harley-Davidsons.

Mail the Coupon

HARLEY-DAVIDSON MOTOR COMPANY, Dept. P., Milwaukee, Wis.

Send me FREE, interesting literature showing the new "Stream-Line" Harley-Davidsons in actual colors.

Name.....

Address.....

City.....

Copyrighted material

Saws are blind as bats!

OCCASIONALLY they will strike a snag that even you cannot see, working havoc with their finely tempered teeth.

But a good saw has amazing recuperative powers—especially when "treated" promptly with the *right* NICHOLSON File.

Most carpenters use NICHOLSON Files—as do woodsmen, mechanics and skilled artisans to whom *accurate filing*, with economy of time and effort, is a major consideration.

NICHOLSON FILE CO.
Providence, R. I., U.S.A.

NICHOLSON FILES
...a File for Every Purpose

Please Mention Popular Mechanics

Learn to Ride It In 5 Minutes

This amazing new Personal Motor—the Indian Prince—is easier to handle than a bicycle. Goes 100 miles on a gallon. Operates at less than ½ cent per mile. Half the weight of ordinary motorcycles. Safe—clean. Perfectly balanced. You'll like it right from the start. Costs less than any other high-grade machine. Write today for illustrated booklet telling all about the Indian Prince, the Personal Motor—and how easily you can buy it.

Indian Motocycle Co.
Dept. P7, Springfield, Mass.

MODELS AS LOW AS $27.50

SPEED BODIES for FORDS

Add class to your Ford with a snappy, "sassy" speed body. Best body bargains on market. Write for fully illustrated catalog showing different models and all Ford accessories.

PARTS-A-FORD CO. 1414 S. Michigan Ave, CHICAGO, ILLINOIS

YOU will make REAL MONEY selling Boys' Suits at $6.85. Big commission. The only proposition of its kind in the country. No competition. Also Men's Suits at $12.50. Selling outfit FREE. Write at once.

"JIM" FOSTER
2250 S. Spaulding Ave. CHICAGO, ILL.

DYNA-MOTOR

As a dynamo it will operate induction coils, light lamps, charge storage batteries, electroplate, etc., makes an ideal machine for experimenting. As a motor they will operate heavy models, emery wheels, and other appliances.

10 Watt Dyna-Motor **$6.50** 32-Watt Dyna-Motor **$8.00**
64 to 200 Watt Dynamos, Armatures, Commutators, Punchings, Parts for Schools and Students.

Send for Catalog
LOOMIS ELECTRIC COMPANY
1427 N. Artesian Ave. CHICAGO, ILL.

AGENTS WANTED!
Salesmen—Distributors

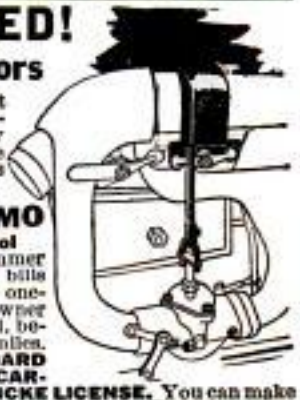

to use and introduce attachment that makes Fords run on 94% air. THERMOSTAT on exhaust automatically turns down needle valve as engine warms, exactly as Ford Manual says do by hand.

BLANCKE AUTO THERMO
An Automatic Carburetor Control
Makes Fords start easier winter or summer—saves half gas and oil—cuts repair bills one-half—reduces carbon formation one-half. Sells on sight to every Ford owner as easily as giving him a $100.00 bill, because it saves $100.00 every 10,000 miles.
CADILLAC NOW USES AS STANDARD EQUIPMENT THERMOSTATIC CARBURETOR CONTROL UNDER BLANCKE LICENSE. You can make Big Money selling this wonderful proven device. Experience not necessary. Blancke plan will start you without capital in a business of your own that makes you from $250 to $2500 a month profit. *Write for free circulars Now!*

A. C. BLANCKE & CO. Dept. 805K, 602 W. Lake Street CHICAGO, ILLINOIS

Copyrighted Material

$3 Down "Brought Me This Genuine UNDERWOOD"

YES, only $3 brings this genuine ***Shipman-Ward*** Rebuilt Standard Underwood direct from our factory, and then only small monthly payments while you are using it. Thoroughly tested and guaranteed for five years.

EASY Monthly Payments

Little more than rental. Balance of payments so small you will hardly notice them, while you enjoy the use of this wonderful machine. You don't have to scrimp and save to pay cash. All at a big saving to you.

Five Year Guarantee

With every typewriter we give a written guarantee. These machines are rebuilt like new by the famous SHIPMAN-WARD PROCESS. Equipped with late improvements. You can't tell them from a new machine. The world's standard typewriter, the same models as sold by the Underwood Typewriter Company today, at a big saving to you. Act now! Get this splendid offer and save money.

From Factory to You

These machines are shipped direct from our factory—the largest typewriter rebuilding plant in the world. They are rebuilt by the famous SHIPMAN-WARD PROCESS. Developed through 33 years in the typewriter business. Through our money saving methods of rebuilding and elimination of a large expensive sales force we are able to make this wonderful money saving offer to you. ACT TODAY, take advantage of it and you will SAVE MONEY.

OUR FACTORY

All Shipments made direct to you from our modern factory—the largest typewriter rebuilding plant in the world.

Free Book of Facts

Write for this free book of facts explaining Shipman-Ward's wonderful system of rebuilding typewriters. We show you exactly how it's done. How you are able to buy them. Complete and valuable information about the typewriter industry, both instructive and educational.

FREE with Every Typewriter

A complete course in touch typewriting. You don't have to know how to operate a typewriter. You can learn to operate this machine in one day. We also give free a waterproof cover and all tools that come with a typewriter.

FREE TRIAL COUPON

SHIPMAN-WARD MFG. CO.,
B-212 Shipman Bldg.,
Montrose and Ravenswood Aves.,
Chicago.

Send by return mail your wonderful offer of Shipman-Ward Standard Rebuilt Underwood, also your book of facts. (This is not an order and does not obligate me in any way.)

Name.....

Street.....

Post Office.....State.....

SHIPMAN-WARD MFG. CO.

B-212 Shipman Bldg., Montrose and Ravenswood Aves., Chicago

33 Years in Business

Copyrighted material

MECHANICS' BENCH SAWS

With this saw you can make your own repairs in shop, home, farm or garage. Makes a clean edge on the toughest wood—no planing necessary. Rips, cross-cuts, bevels, miters, mortises, tenons, or grooves. Attach to any lamp socket. Weight only 61 lbs. Will cut up to 1¼". All metal. Saw-size 6 in. Table 10x13, base 7x11, height 7 in. Table tilts for beveling 5 degrees left, 10 degrees right.

Saw Table Can be purchased with 6" saw for **$22.50**
Delivery paid East of Mississippi.
$24.50 Delivery paid West of Mississippi.

Motor This heavy duty motor can be furnished separately for **$12.90**
Delivery paid East of Mississippi. **$13.90** Delivery paid West of Mississippi. Complete with Cord, Plug, and flat or grooved Pulley. Guaranteed 50% Overload.

Special Prices on Quantities of 10 or Over

Write for Our Spring and Summer Catalog

PAUL J. DEVITT, 1101-1107 So. 2nd St., Phila., Pa.

HARDWARE HEADQUARTERS OF PHILADELPHIA

Makes Autos Go 49 Miles on One Gallon of Gas

James A. May, of 805K Lacotah Building, Sioux Falls, S. Dakota, has perfected an amazing new device that cuts down gas consumption, removes all carbon, prevents spark plug trouble and overheating. Many cars have made over 49 miles on a gallon. Anyone can install it in five minutes. Mr. May wants agents, and is offering to send one free to one auto owner in each locality. Write him today—*Adv.*

The Traffic Cop of the Air

Add a **Ferbend Wave Trap** to your Radio Set and "Police" your reception. Regulate traffic. Guaranteed to tune out any interfering station. Widely imitated but never equalled. The original and only successful **Wave Trap.** Now in its third year. Sent postpaid on receipt of $3.50 or C.O.D. plus postage. *Send for Free Booklet.*

Wave Trap

Ferbend Electric Co., 15E. So. Water St., Chicago

Big Profits—Easily Made

AGENTS

Here is your big chance for quick sales and large profits! Every home needs a "Sturdi Plane." A real smoothing plane, not a toy. Carbon tool steel blade, hardened, ground and sharpened. Holds its cutting edge. Low price sells the "Sturdi Plane" on sight. Agents making big money. Write for free circular and agent's prices.

HAMILTON MFG. CO.
382 South Senate Ave., Indianapolis, Indiana

STOP FORD CRANKSHAFT END-PLAY!

C-A ADJUSTABLE BEARING corrects and prevents end-play without removing motor. Eliminates many troubles. Easy to install—simply drop pan. Only **$3.75.** Ask your dealer or sent prepaid by
ADJUSTABLE BEARING CO. Dept. P BRAZIL, IND.

MOVIES In Your Home

Our marvelous, practical **Movie Machines** sell as low as **$3.75** postpaid, and use same size film as big theatres. We also have wonderful films at lowest prices—with a new film exchange service. **Don't Miss This!**

Write NOW for Free Catalogue

PARAMOUNT MFG. COMPANY Dept. M7 Boston, Mass.



$150 to $300 MONTHLY PROFITS EASILY MADE WITH ONE DAY BATTERY CHARGING

Here's **your BIG CHANCE to add $1500 to $3000 a year to your income.** An HB One Day Battery Charger **recharges auto and radio batteries in one day or less.** Requires no expert attention. Thousands in use **endorsed by leading battery makers. Just $35 cash puts an HB One Day Battery Charging outfit in your shop,** complete ready to operate. 30 days' free trial on money-back guarantee. **Long easy terms on balance,** more than paid by your big monthly battery charging profits. **HB users everywhere making big money**—you can, too. **Write today for free bulletin.**

HOBART BROS. CO. Box M77 TROY, OHIO

ONE DAY BATTERY CHARGING MAKES YOUR SHOP PAY BIG PROFITS

Digitized material

21 Jewel Santa Fe Special on credit

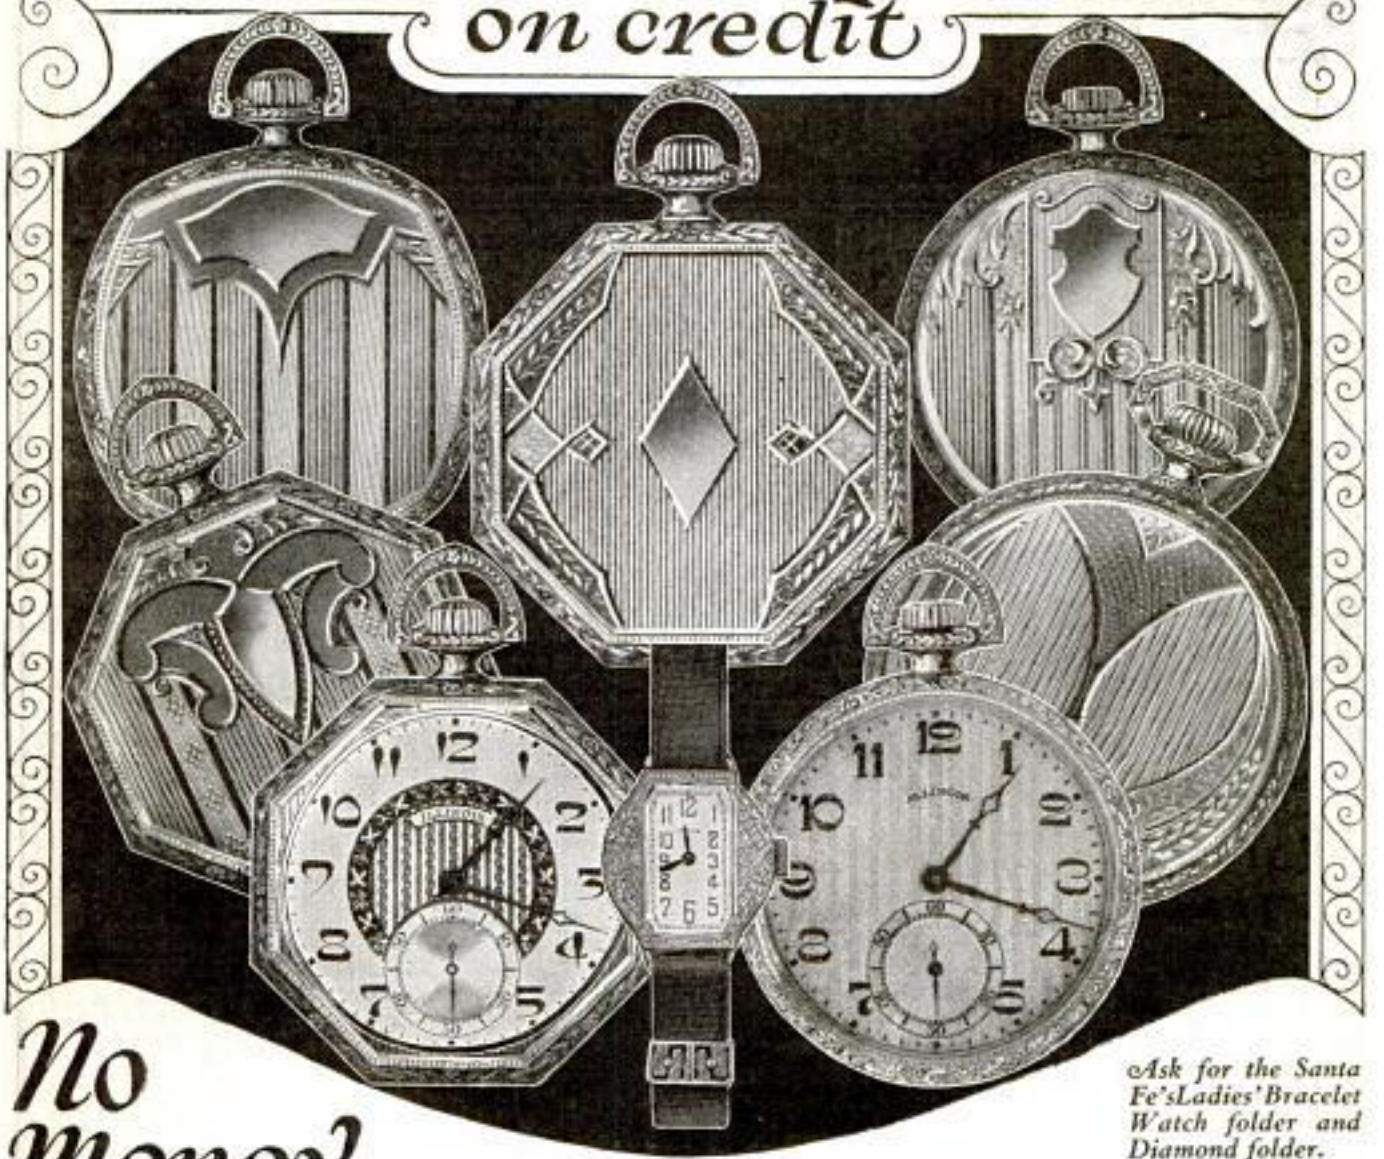

Ask for the Santa Fe'sLadies'Bracelet Watch folder and Diamond folder.

No Money Down

WE will send this famous watch direct to you, express prepaid on FREE Approval. Examine watch and be convinced it's the best watch buy you ever saw. You save ⅓ to ½ your money by purchasing a Santa Fe Special Watch. We trust you—wear watch while paying for it.

Mail Coupon for FREE Watch Book →

Clip the coupon, fill out and receive the FREE WATCH BOOK. All the newest watch case designs in white or green gold, fancy shapes and thin models are shown. Read our easy payment offer. Select the watch you would like to see, we will send it to you on approval, express prepaid. Wear the watch 30 days FREE—return at our expense if not fully satisfied.

SANTA FE WATCH COMPANY
76 Thomas Building **Topeka, Kansas**
The Home of the Great Santa Fe Railway

SANTA FE WATCH CO.,
76 Thomas Building,
Topeka, Kansas

Please send prepaid and without obligation your Watch Book Free, explaining your "No Money Down" Offer on the Santa Fe Special Watch.

Name.....

Address.....

Copyrighted material

THIS CLEAR, STEADY, ACCURATE, POWERFUL

6-Power Pocket Telescope

$2 Postpaid with excellent limp leather case! Length closed 3 1-4 in., maximum diameter 1 3-16 in.

Every One Brand New and Guaranteed by both this company & the maker

Made by the Wollensak Optical Company, one of the finest makers of lenses and optical goods in the world. Thoroughly tried and tested in actual use before putting on the market. No bigger'n a jack-knife, easily carried in vest pocket, yet a powerful, precise monocular that brings distant objects close in full detail, without the "vibration" present when higher power telescopes are used. Adjustable twice as quickly as binoculars. Nothing cheap in appearance or construction. Mighty neat, black, baked-in enamel, with non-slip grip. Absolute satisfaction or money back. **$2 prepaid.** Check, money-order, or C.O.D.

Money back if not thoroughly satisfied in every respect. A wonderful little scope for beach, woods, motor boats, hunting, athletic games and general use.

Boston Sporting Goods Co. Dept. P, 80 Boylston St. BOSTON - MASS.

FREE CATALOG of AUTO PARTS

WRITE for Our NEW FREE CATALOG

for ALL CARS *and* TRUCKS NEW *and* USED

SAVE 30% TO 80% ON PARTS AND ACCESSORIES

We have everything from a Cotter-Pin to a Complete Power Plant. Send us your Old Parts—we can duplicate them either new or used. **Motors—transmissions—clutches—differentials—front and rear axles—radiators—fenders—cushions—tops—bodies—springs—wheels—gears—axle shafts—rings—pins—bearings—valves—gaskets—generators—starters—magnetos—coils—distributors—windshields—lamps—and accessories—(bumpers, snubbers, etc.)** 15 years of progress has made ours the largest stock of its kind in the world. Service, Quality, Low Prices and Honest Dealing is Our Motto. *Write us Today for your Auto and Truck Needs.*

The Original **Warshawsky & Company, Inc.**
World's Largest Car Wreckers and Replacement Parts House
No Branches 1915-35 South State Street, Chicago

AGENTS SELL THE OVERSIZED

JOHNSON Red Pen Each pen is hand made and ink tested in our own factory.

FIVE YEAR GUARANTEE with each pen. **$7.00 VALUE FOR..... $3.50**

Send for AGENT'S SAMPLE at $1.75 C. O. D. plus postage, and complete literature, or send for literature only.

JOHNSON PEN CO., Dept. AP, 117 So. First St., Rockford, Ill.

SPORT BODIES for FORD and CHEV. 490 at $34.50 UP

$8

Life-size paper patterns—You can build your own body at small cost. We are manufacturers and our quantity production enables us to quote exceptional low prices. Our unique shipping methods save you 73% in FREIGHT CHARGES. Send at once for free particulars on Central Bodies. Our Book: **"HOW TO BUILD A FORD RACER"** sent anywhere on receipt of 25c in cash or stamps. WRITE TODAY!

UNDER SLUNG PARTS Per Set **$6.75**

Central Auto Supply Co. Dept. 120, Louisville, Ky.

Sell our $25 Tailored All-wool suits

Million dollar tailoring house. Special made-to-measure all-wool suits retail $25. Big profits. 6-day delivery. Satisfaction guaranteed. Experience unnecessary. Exclusive territory to capable salesmen. Outfits free. Write at once.

HOMELAND TAILORING CO.
Dept. M, 71 to 79 W. Lafayette Ave., Baltimore, Md.

Lighting Fixtures

READY TO HANG
(Direct from the Manufacturer)

Completely wired, including glassware. Send for New Catalogue No. 27. Just reduced prices.

Special proposition to DEALERS.

ERIE FIXTURE SUPPLY CO.
STA. A ERIE, PA.

FREE AIR It will boost your garage or service station business. Dependable Franklin Super-Single Stage Air Compressors are doing it the country over. Write today for free illustrated booklet on Franklin Aids to Better Business. Franklin Air Compressor Works, 2616 Main Street, Norristown, Pennsylvania.

General Electric Company, Schenectady, New York

Hand Forged Razor Steel Blades, No. 57

Direct at Factory Prices

This $2 KNIFE $1.18 Postpaid
Hand Forged Razor Steel Blades

Handy shaped Blade makes this knife best for mechanics, sportsmen and farmers; light but strong; resharpened easily. Stag handle. German silver finish; blades file tested, hand forged from razor steel and warranted.

Sample $1.18 3 for $3.00 Postpaid.

Send for our 100-page List and *"HOW TO USE A RAZOR"* **FREE**

MAHER & GROSH CO., 106 A St., Toledo, Ohio

Copyrighted material

Make $100 Weekly-*sell RADIO*

Demonstrate Once—Results Mean Sure Sale

Coast to coast, lowest prices, attractive four-tube instrument $39.50. Big commission to you. Exclusive territory to proven salesmen. Territory going fast, write today for large illustrated book No. 100. Don't fail to name your county.

OZARKA, Inc.
851 Washington Blvd. Chicago, Ill.

AUTO BATTERIES

6 Volt, 11 Plate . .	$ 9.50
6 Volt, 13 Plate . .	11.50
12 Volt, 7 Plate . .	13.00

RADIO BATTERIES

6 Volt, 100 Amp. .	$ 9.50
6 Volt, 120 Amp. .	11.50
6 Volt, 140 Amp. .	13.00

Battery Prices Smashed!

To Consumers Only

Here is real battery quality, *guaranteed* to you. **Order direct from factory.** Save dealer's profit. *Written 2-year guarantee with each battery.* No need to take a chance. Our battery is right—price is lowest ever made. Read prices—be convinced.

BUY DIRECT SEND NO MONEY

Simply send name and address and style wanted. Battery shipped same day order is received, C. O. D., subject to examination. 5 per cent discount for cash with order. You can't lose! Order now.

ARROW BATTERY CO. Dept. 18
1215 S. Wabash Ave., Chicago

DEMONSTRATORS WANTED

For 5-Tube Neutrodyne Set **RADIO**

Live young man in every town and neighborhood, to own, operate and take orders for the licensed, standardized, synchronized "De Luxe 5-Tube Coast-to-Coast Neutrodyne" made famous in "The Radio Digest." Complete assembly retails only $39.40. Thousands sold. Furnished you at discount. Liberal financial arrangements. Write us at once all about yourself. Ask for plan. Also illustrated description of set. **Be First.**

The Radio Shack America's LARGEST Radio Dealers Dept. G28, 55 Vesey Street, New York City

RADIO

LOUD SPEAKING FACTORY GUARANTEED SET only $29.50

SEND FOR testimony of users and SPECIAL OFFER.

MIRACO GETS 'EM COAST TO COAST

AGENTS DEALERS WRITE

MIDWEST RADIO CORP'N
Pioneer Builders of Sets
407-N, E. 8th St., Cincinnati, O.

FREE This Radio Book of Bargains

Big Money-Saving Radio Catalog

Save about half on Everything in radio. Assembled sets and parts for complete sets. Supplies. Accessories. Valuable radio data. Write today. **RANDOLPH RADIO CORP.**
159 N. Union Avenue, Dept. 436, Chicago

UTAH LOUDSPEAKER

Ours is the strongest guarantee! Use it 10 days. If not the finest you ever heard, return it and get your money. **Dealers Everywhere.**

Utah Radio Products Co. Dept. 50, 1427 S. Michigan Ave. CHICAGO, ILLINOIS

Save $1.50 ON COST OF NEW TUBES

BY HAVING YOUR OLD TUBES REBUILT AT $1.50 Each

Guaranteed equal to new. Send us your tubes by parcel post. We return parcel post, C. O. D. and try to maintain 24 hour service. Interesting Booklet on care and use of Tubes sent Free on request.

Harvard Radio Laboratories
204 Old Colony Ave., So. Boston, Mass.

Tycos-Taylor

Tycos STORMOGUIDE

2256X

WHY guess at the weather? Know what's going to take place 12 to 24 hours in advance. Weather forecasts avoid disappointments. Write for free booklet.

Taylor COMPASSES

For Experimenters and Radio Enthusiasts

Many styles to suit all purses. Don't travel without one. Your dealer carries *Taylor*-Quality Compasses

Telaway	°Gydawl
Leedawl	°Aurapole
Magnapole	°Meradial
Flodial	°Ceebynite
Litenite	°Usanite

°Hunter Cases

***Tycos*-Rochester**

A quality publication devoted entirely to Weather. Send 10c in stamps for sample copy. Price $1.00 per year.

—*Cut here*—

Taylor Instrument Companies **Use this coupon**
ROCHESTER, N. Y., U. S. A.

☐ Please send me a sample copy of Tycos-Rochester, 10c in stamps is enclosed.

☐ Booklet on *Taylor* Compasses and *Tycos* Stormoguide, Free.

Name.....

Street.....

City..... State.....

Dealer's Name.....

Copyrighted material

For this
BALL-BEARING LONG WEARING L. C. SMITH

WE will send you this wonderful typewriter with **absolutely no obligation** to you whatsoever. You **send no money.** When the machine arrives, you deposit only $3 with your express agent and test this remarkable bargain thoroughly in your own home or office **for 10 days.** If you are not satisfied it is the **greatest value** and the **finest typewriter** you ever saw, just tell the express agent and **he will hand back every cent to you.** If you keep it, you send monthly payments so small you'll never miss them—just like rent.

LIFETIME CHANCE!

Our New Special **prices are the lowest ever made** on the world famous **BALL-BEARING Silent L. C. Smith**—late style models—up-to-date, **full size perfect machines**—every modern convenience—absolutely finest quality rebuilt and guaranteed for 5 years. No other typewriter at anywhere near our price will give as many years of perfect service. We are the **largest exclusive dealers in L. C. Smith Typewriters in the world.** The **easiest running** and **longest wearing** typewriter ever built. Over half a million sold. Easiest to operate and learn.

FREE TO YOU NOW!

Complete Course of Lessons on Touch Typewriting; Operating and Instruction Book; Tools and Waterproof Cover—all free with each machine. Send for **Free Trial Plan; New Special Low Price Offer; and Booklet of Valuable Typewriter Information** before offer is withdrawn.

SMITH TYPEWRITER SALES CORP.
300-360 E. Grand Ave. Chicago, Illinois

Smith Typewriter Sales Corp., 300-360 E. Grand Ave., Chicago, U. S. A.
Send me your New Special Offer; Free Booklet of Valuable Typewriting Information; Your Catalog; and Free Trial Plan with no obligation to me.

Name.....

Address.....

Present Day Fuels require an Up-to-Date TORCH

TURNER BLOTORCH "Safe as a Candle"

$8.25 Postpaid

With a patented Baffle and heater plug. The orifice trouble, so common to ordinary blotorches, is avoided in the Turner No. 45 because of the patented Twin Needle control.

TURNER No. 45. KEROSENE GASOLINE

Seamless, leakproof Brass Tank has but one opening and that above fuel line. Pistol grip handle fits any hand comfortably. FEARLESSLY GUARANTEED. Ask your dealer or write for new catalog. **$8.25 Postpaid.**

THE TURNER BRASS WORKS
Industry Ave., Sycamore, Illinois
The World's Largest Exclusive Manufacturers of Blotorches, Fire Pots and Brazers

***One* "POLLY" in Place of *Ten* Wrenches**

One "Polly" Wrench takes the place of ten solid end wrenches. A set of only three "Polly" Wrenches will fit every job you have—a complete wrench equipment. Save space, time and labor. No other wrench like it. Instantly adjusted, jaws lock automatically and cannot spread. Light and easy to handle, but unusually strong and durable. Fully Guaranteed.

Sizes 6, 9 and 12 inch; 85c, $1.25 and $1.75—or complete set $3.85. From dealers or direct from us postpaid.

GELLMAN MFG. CO.
Dept. 15
ROCK ISLAND, ILL.

I Offer You $48 a Week and a DODGE TOURING CAR

We want men and women as local representatives to demonstrate and take orders for Comer All-Weather Topcoats and Raincoats. New offer enables you to earn $48 a week and Dodge touring car. No experience necessary. Write quick.

Comer Mfg. Co., Dept. W-5111, Dayton, O.

LYON BODIES

Send For Our 1925
FREE BOOK OF BARGAINS
Containing a full line of bodies and accessories at exceptionally low prices. **Buy direct from the factory.**

$24.90 AND UP

LYON TIRE SALES CO.
Body Division Dept. P-34
1344 S. Michigan Ave., Chicago

The Hawkeye Reminder Clock

"Watchful of the Time"

A handy clock, four by five inches, small enough to be held in one hand; hangs flat against the wall, or set on the table or dresser. You can instantly *set it to any one minute* from one to ninety, and at end of time set for, it rings until answered and stopped by touch of a lever. Of great service in the

Kitchen, Factory, Studio, Office, Etc.

Made and guaranteed by reliable clock-makers. Good time-keeper, and can be used as a regular alarm clock.

Price, $8.90

HAWKEYE CLOCK CO., MUSCATINE, IA.

I PAY MEN $100 a week

Make $100.00 a week and up selling our fine made-to-measure, all-wool suits, direct to wearer. **Biggest values—positively sell on sight.** Biggest commissions paid in advance. We attend to delivery and collections. 6 x 9 swatch samples—over 100 styles all one price—furnished **FREE.** Part or full time men write at once.

W.Z. GIBSON, Inc., 161 W. Harrison St., Dept. 516 Chicago

Copyrighted material

$1 Brings This Genuine DIAMOND

Easy for you to own this beautiful ring or give it as a present. Simply send $1 to us today.

10 DAYS' FREE TRIAL

Wear ring 10 days and if you don't agree it is an amazing bargain, return it and we will refund your money. If satisfied, pay $3 a month until $30 is paid.

FREE Catalog. Diamonds, Watches, Jewelry, $10 to $1000. All on long credit. Wonderful values.

Est. 1890. Address Dept. 726

BAER BROS. CO.
6 MAIDEN LANE - NEW YORK

LOOSE CHAIR RUNGS
FASTENED FOR ALL TIME
with
HOLDEMS

Trade Mark Reg. U. S. Pat. Office—Patented

NO GLUE, NO NAILS, SIMPLY INSERT HOLDEM. NOTHING SHOWS

Assorted Sizes { Box of 30 ..... 25c; Box of 70 ..... 50c; Box of 150 ..... $1.00 } Post Paid

HOLDEMS CO., Dept. 29
161 Summer Street, Boston, Mass.

Factory to Rider

Saves $10 to $25 on the **Ranger** Bicycle you select. You can have your choice of **44 Styles**, colors and sizes. Delivered free on approval, *express prepaid*, for **30 DAYS' FREE TRIAL**. Bicycles, **$21.50 up.**

$5 a Month if desired. Possession and use at once on our Liberal Easy Payment plan. Parents often advance first payment.

Tires best quality, at factory prices, *express prepaid*. Lamps, wheels and equipment, low prices. **Send No Money, do business** direct with makers.

Mead CYCLE COMPANY DEPT. G-108 CHICAGO

Write today for free Ranger Catalog, factory prices and marvelous easy payment terms

HIDE UGLY WIRES

Encourage your boy to fill the walls of his room with pictures by using

Moore Push-Pins
Glass Heads—Steel Points

Moore Push-less Hangers
"The Hanger with the Twist"

10c pkts. Easy to use; won't injure walls. Everywhere.

MOORE PUSH-PIN CO., Philadelphia, Pa.

38 MILES ON A GALLON OF GAS

Artesian, So. Dak. Mr. J. W. Fitzgerald, 121 First St., of this city, announces the perfection of an amazing device which is enabling car owners to nearly double their mileage and remove all carbon trouble. With this new device, motorists have made 38 miles on a gallon of gasoline. This inexpensive device is automatic—can be attached in five minutes without a change in the motor. Mr. Fitzgerald wants agents to introduce this article, and for a short time will send it free to anyone interested. Just send 10c to cover postage, etc. Write him as follows: I accept your free trial offer. You may send me one of your Vapex Rebarburetors. I will try it ten days, and will then either send you $1.49 or return it and owe you nothing.

She hated to tell him

OF late her brother seemed much discouraged. He was being left out of things—dances, dinners—and somehow "the girl" never had an open date. His sister knew the cause.

She hated to tell him, because it was such a personal thing. ✦ ✦ ✦

Nearly all young men are inclined to have a grimy-looking skin, spotted with blackheads and dull in appearance. Few realize that this hinders their success in life. Pompeian Massage Cream helps you overcome this handicap by giving you a clean, ruddy complexion.

✦ ✦ ✦

Clears the Skin: Pompeian Massage Cream thoroughly cleanses the pores. It helps clear up blackheads and pimples by stimulating healthy circulation, and by keeping the skin clean and the pores open.

Easy to Use: Rub it in; rub it out. After shaving or washing rub it in gently. Continue rubbing and it rolls out, bringing with it all the dirt and skin impurities. Result—a clean, healthy skin with clear, glowing color.

Your drug store has it.
Use it regularly at home.

SPECIAL OFFER

⅓ of 60c jar for 10c

For 10c we send a special Trial Jar containing one-third of regular 60c contents. Contains sufficient Pompeian Massage Cream to test thoroughly its wonderful benefits.

Pompeian Co., Cleveland, Ohio, Dept. 24

Gentlemen: I enclose a dime (10c) for trial jar of massage cream.

Name_____

Address_____

City_____ State_____

Copyrighted material

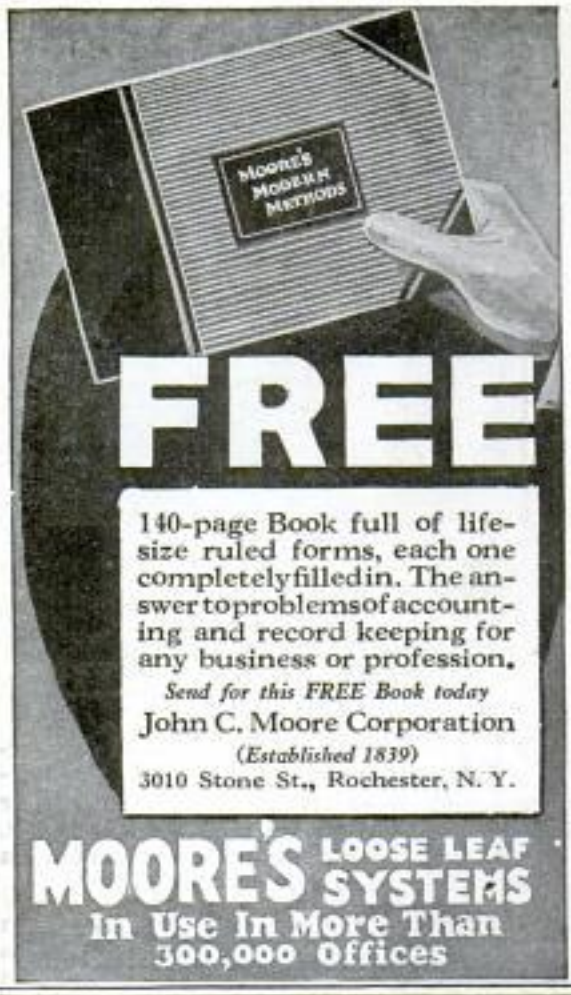

FREE

140-page Book full of life-size ruled forms, each one completely filled in. The answer to problems of accounting and record keeping for any business or profession.

Send for this FREE Book today

John C. Moore Corporation

(Established 1839)

3010 Stone St., Rochester, N. Y.

MOORE'S LOOSE LEAF SYSTEMS

In Use In More Than 300,000 Offices

DIVINE RED DEVIL Water Motors

Simple—strong—durable. Wonderful little workers for all sorts of household and shop uses. Thousands in use. For all light power purposes. Attaches to faucet.

Two sizes: 4"—$4.25
6"—$6.75

The higher the water pressure the more work they do.

Send today for catalogue.

Divine Water Motor Company
Utica, N. Y.

½ SAVED on all Standard Typewriters

AT LAST — World's Best Typewriters with every modern writing feature at positively lowest prices and on easiest terms ever offered.

10 Days Free Trial
A YEAR TO PAY
5 YEARS GUARANTEE

Standard Machines so perfectly **Re-Manufactured** by the exclusive **Young Process** that they look and write like brand new. Our exclusive, distinctive process makes possible better typewriters at lower prices.

FREE Big Illustrated TYPEWRITER BOOK. Write now. See our amazing typewriter bargains. Read what users say and the unusual service we will give you. Don't wait. Write today.

Young Typewriter Co. 654 West Randolph Street Dept. 1107 Chicago, Ill.

Different from all others—the NEW BENJAMIN AIR RIFLE

Made on a different principle from all other Air-Rifles.

The Benjamin is really a strong air-pump used to compress the air in the air chamber to any degree of power desired. From one to six strokes of the pump give all the force necessary. Each additional stroke gives increased power. The Benjamin works on the same principle as all air-drills and air-hammers—with this difference:

You control the shooting force as you desire. Look at this block of hardwood. It shows how Benjamin power is regulated as you wish.

You can't have accidents with a Benjamin. It's **safe, always**, because you control the power. The Benjamin never loses shooting force, and has no springs to get out of order or shake your aim. Write us for an interesting folder about this wonderful air-gun.

If your dealer does not handle same, send direct to factory.

(PRICE $5 POSTPAID)

Ask your dealer for demonstration.

BENJAMIN AIR-RIFLE & MFG. CO., 615 N. Broadway, St. Louis, Mo.

Pacific-Coast Representatives THAYER & BOWER, Los Angeles, Calif., and San Francisco, Calif.

THIS WONDERFUL INVENTION

converts any ordinary cook stove into a gas stove. OXO-GAS is made from kerosene and air. Cheaper, cleaner and more efficient than coal. Responsible distributors wanted.

GLORIA LIGHT CO.
111-7 N. May St. Chicago, Ill.

MAKE MONEY SELL MADISON SHIRTS

Direct from our factory to wearer.

Easily sold. Over one million satisfied wearers. No capital or experience required. Large steady income. Many earn $100. to $150. weekly. Territory now being allotted. *Write For Free Samples.*

Madison Shirt Mill, 511 B'way, New York

AGENTS 500% PROFIT

GENUINE GOLD LEAF LETTERS

Guaranteed to never tarnish. Anyone can put them on stores and office windows. Enormous demand, large profits. Paul Clark says: Smallest day $28.70. R. L. Reel made $920 in two months. Write today for free sample and liberal offer to general agents.

METALLIC LETTER CO., 433-B N. Clark St., CHICAGO

Self-Filler DE LUXE Stylo Pen

"INDEPENDENT"

All the best features of a Fountpen. Lasts longer. Writes smoother. Improves handwriting. Eliminates fatigue. GUARANTEED.

14 Kt. White Gold Point, Chased Rubber Holder, Lever Filler. Pocket Clip.

$2.00 By Mail

Your Name in Gold Inlay, 25c.

Write for Pen Catalog. Agents Wanted.

J. C. Ulrich & Co., 161 Washington St., New York

Known the World Over for 40 Years.

Copyrighted material

Get This!

A Profitable Business of Your Own!

Be independent. Make and sell this **new candy novelty.** Goes like hot cakes. Everybody wants it. **Big quick profits!** Many make $100 a day. (Letters prove this. Our files are full of amazing testimonials.) **Nothing like it.** Sells everywhere. Small investment. No help needed. **Work dignified, easy and clean.** Get all information. Send name, address to

FREE MY BOOK "CANDY SUCCESS"

A.T. DIETZ 445 Sayso Bldg. Toledo, O.

Forming a Company?

If starting a new business or reorganizing one you may find it expedient to organize on the Common Law plan under a Declaration of Trust. The economies and advantages are set forth in "D-53"—a pamphlet mailed free upon request. C. S. Demaree, publisher of legal blanks, 708 Walnut, Kansas City, Mo.

DEFENDER *Keyless*

AN IMPROVED PADLOCK $2.

No Keys *No Hinges*
No Springs *No Rivets*

Nine times stronger than ordinary padlocks. Its extreme simplicity permits it to be Opened Quickly Night or Day. There are 1024 possible combinations; and YOU CAN EASILY CHANGE THE COMBINATION TO ANY ONE YOU SELECT.

$2.00 brings a Defender postpaid, or pay postman $2.10 on delivery. *Money Back Guarantee.*

Dealers and Agents Wanted

Defender Lock Company, Dept. C. 68 Cliff Street New York, N. Y.

NEW IRON!

Cuts ironing time in half. Saves steps. Quick, regulated heat. Beats electricity or gas. No cord. No tubes. Low priced. Ends hot stove drudgery. Easy, cool, comfortable ironing. Use anywhere, indoors or outdoors. Dependable. Lasts a lifetime. Guaranteed.

30 Days Free Trial Send no money. Write quickly for special introductory price and Free Trial Offer. Just send name and address. No obligation. **AGENTS Write for Offer**

THE AKRON LAMP CO., 37 Iron Bldg., AKRON, O.

Beautiful HOUSES and BUNGALOWS $900 AND UP CAN BE BUILT FOR

This and many others in my new book, Building Plans for Modern Homes, will save you hundreds of dollars. One of the most complete and comprehensive books of plans ever published by any architect. New edition just off the press. Nearly 500 floor plans and photographs of bungalows, Colonial houses, etc., costing from $300 up; gives sizes and cost to build. **Sent postpaid for $2.00**

FREDERICK H. GOWING ARCHITECT
101 Tremont St., BOSTON, MASS.

Do Your PRINTING

Cards, stationery, circulars, labels, paper. **Complete Outfits $8.85 up,** Rotary Jobber, $150, Card Cutters $3 Save Money. Print for others, big profit. Easy with rules sent. Write for catalog presses, type, paper, cards ink, etc. **THE PRESS CO., L-37, MERIDEN, CONN.**

RAISE BELGIAN HARES

NEW ZEALAND REDS—Chinchillas—Flemish Giants

MAKE BIG MONEY—We supply stock and pay you following prices for all you raise: Belgian Hares $2 each—New Zealands $3 each—Chinchillas $4 each—Flemish Giants $5 each. 32 page illustrated book, catalog and contract, also copy of **Fur Farming** magazine, tells how to raise skunk, mink, fox, etc., for big profits, all for 10c. Address

OUTDOOR ENTERPRISE CO., Box 25, Holmes Park, Mo.

LOFTIS BROS. & CO. EST'D 1858

THE OLD RELIABLE ORIGINAL CREDIT JEWELERS
Dept. B-894 108 N. State St., Chicago, Ill.
Stores in Leading Cities

DIAMONDS WATCHES
CASH or CREDIT

Send for Catalog

Over 2,000 illustrations of Diamond-set Jewelry, Watches, Wrist Watches, Pearls, Mesh Bags, Silverware, etc. Sent prepaid for your **FREE EXAMINATION**

No. 20 Five radiant Blue White Diamonds. All Platinum. Special at $185. Terms, $18.50 down, then **$4.75 A Week**

No. 68 Blue White Diamond, Solid 18-k White Gold. $131.50. Only $15.75 down, then **$3.50 A Week**

No. 33 Blue White Diamond, Solid 18-k White Gold. $69.50. Only $6.95 down, then **$1.75 A Week**

Our Diamonds are exquisitely beautiful, high-grade, QUALITY gems. Blue White of dazzling brilliancy—the finest offerings of the European Diamond markets. Personally selected by our expert diamond buyers.

No. 49—"Wing" design, beautifully engraved. Solid 18-k White Gold, 17 Jewels. $35.00. Delivered on first payment of $3.50, then ..... **$1.00 A Week**

No. 822 Dazzling Blue White Diamond. Solid 18-k White Gold. Price $89.00 Pay $9.00 down, then **$2.25 A Week**

TERMS: Goods delivered on first payment of one-tenth of purchase price; balance in equal amounts—payable weekly, semi-monthly or monthly, at your convenience. **Satisfaction Guaranteed or Money Refunded.**

No. 55 Sparkling Blue White Diamond. Solid 18-k White Gold or Solid 14-k Green Gold. $100. Terms, $10 down, then **$2.50 A Week**

No. 823 Blue White Diamond of dazzling brilliancy. Solid 18-k White Gold. $37.50. Delivered on first payment of $3.75, then **$1.00 A Week**

Buy of LOFTIS, the Direct Importer. Select as many articles as you wish and have all charged in one account. Catalog explains everything.

We invite comparison of quality and prices
All Goods Delivered on First Payment

Diamonds Win Hearts

WEDDING RINGS

No. 824—The "Elite" Wedding Ring. Solid 18-karat White Gold. **$7.50**

The "Elite," all Platinum, $25 up. With Diamonds: Three Diamonds, $65; five Diamonds, $80; seven Diamonds, $95; nine Diamonds, $110; surrounded by Diamonds, $220.

17 Jewel Elgin

No. 15—Green Gold, 17-Jewel Elgin Watch; 25-Year Quality Case; 12 Size, Gilt Dial, $30; $3 down, then **$1.00 A Week**

High-grade Railroad Watches
Guaranteed to Pass Inspection

HAMILTON No. 992, 21 Jewels, Adjusted to 5 Positions, G. F. case, guar. 25 years **$55**
ILLINOIS "BUNN SPECIAL," 21 Jewels. Adjusted to 6 Pos. G. F. case, guar. 25 yr. **$50**
ELGIN'S LATEST RAYMOND, 21 Jewels; 8 Adjustments, Runs 40 hrs. one winding **$55**

Send for the Loftis Catalog

Radio Fans Listen in on W. H. T. every Monday night from 7 to 7:30, every Friday night from 9:30 to 10, Central Standard time. Loftis Bros. & Co.'s hour of music.

Copyrighted material

SAVE MONEY
Get This Book

HANDY MAN BOOK

Install Your Own
PLUMBING & HEATING
NEW EASY WAY - SAVE HALF

25c
Reg. Price 50c

Brings you this big Plumbing and Heating Encyclopedia-Catalog. Write for your copy today without fail.

Hot Water Boiler

Guaranteed Heating Plants

Our Handy-Man Book shows how. Big 256-page well-bound encyclopedia of Plumbing and Heating Outfits, Systems, Supplies, Fixtures and Accessories—10,000 items—illustrated. Hundreds of floor plans, elevations, diagrams, trade secrets, money and trouble-saving kinks, etc., "How to save coal in heating," "Easy repair methods." Every householder, contractor, farmer, mechanic, institution needs this book. Shows how to save wages, work and materials.

Big Handy Man Book

Water Supply System

Tells how we help you plan and install. From rough sketch or description we supply working plans and clear instructions. We loan the tools needed. Any handy man can install. This is the place to buy on money-back guaranty. Plumbing Outfits and Supplies: Water Systems; Hot-Air, Water or Steam Heating Plants; Radiators, Pipes, Boilers or Septic Disposal Tanks.

Send 25c for Yours Today

We have spared no effort or expense to complete this remarkable and instructive book. To keep from sending it broadcast to disinterested persons, we request a deposit of 25c, which will be refunded on your first order—or send for our FREE Bulletin. Write today and save half.

Bathroom Outfit

HARDIN-LAVIN CO.
107-17 West Pershing Road
CHICAGO

NOW! New Low Engine Prices

Only $5.69

a month for a few months—easy to own the famous standard WITTE Engine. Uses Kerosene, Gasoline, Distillate or Gas. Equipped with celebrated Troublepreof WICO Magneto. Simplest and cheapest to operate. New device makes starting easy. 50% surplus power. Sizes 2 to 25 H-P—all styles. Sold direct from factory to you on NINETY DAYS' FREE TRIAL. Write today for my new illustrated engine book—sent absolutely Free. No obligation to you.

FREE BIG NEW ENGINE BOOK

WITTE ENGINE WORKS
1741 Witte Building, - - - KANSAS CITY, MO.
1741 Empire Building, - - - PITTSBURGH, PA.
1741 Witte Building, - - SAN FRANCISCO, CALI.

BURN YOUR NAME ON TOOLS
WITH THE
ARKOGRAF

PROTECT YOUR TOOLS FROM THEFT
Write with electricity any name or design on the hardest and finest tools and instruments, or any metal, like writing on paper with pen or pencil.
Complete Outfit $3.50—Prepaid Anywhere
Interesting illustrated circular free. Write today. Agents wanted.
ARKOGRAF PEN CO., 1171 E. Stark St., Portland, Oregon

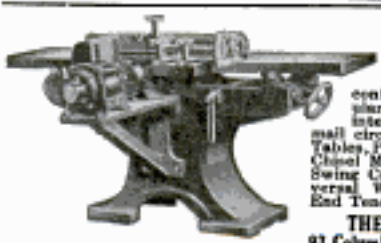

CRESCENT
Wood Working Machines

continue to steadily increase in popularity. Tell us just what you are interested in and we shall be glad to mail circular. Band Saws, Jointers, Saw Tables, Planers, Planers & Matchers, Hollow Chisel Mortisers, Borers, Disk Grinders, Swing Cut Off Saws, Cut Off Table, Universal Wood Workers, Shapers, Single End Tenoners.

THE CRESCENT MACHINE CO.
93 Columbia St. Leetonia, Ohio, U. S. A.

Saw Books FREE

"Saws in the Shop," "Saw Sense," "Saws on the Farm"; just send your name and address, and say which of these helpful books you want—and we will send it FREE.

E. C. ATKINS & CO., Dept. P, Indianapolis, Ind.

SQUAB BOOK FREE!

Squabs are selling at highest prices ever known. Greatest market for 20 years. Make money breeding them. No mixing feed, no night labor, no young to attend. Start small, grow big. Start now. Read how our customers sell squabs for $12 a dozen. We have been established for 24 years. Better look into this. Let us send now, at no cost to you, our big, illustrated free book telling how to make money breeding squabs. Address

Plymouth Rock Squab Co., 634 H. St., Melrose Highlands, Mass.

Oh How Lovely!

1000 ACTUAL FABRIC SAMPLES

AGENTS

Saleswomen—Salesmen!

Make big money taking orders for our beautiful Dress Goods, Silks, Wash Fabrics and General Yard Goods. Large Book of Fabric Samples furnished to Agents. Write today.

National Imp. & Mfg. Co.
573 Broadway, Dept. G, N.Y. City

THE TOOL OF A THOUSAND USES $1.00

More Than a Wrench. Better than Pliers.

Does the work of both. Instant adjustment. Unbreakable. Drop-forged steel. Saves time and trouble for mechanics, plumbers, electricians, farmers, automobilists, housewives. Grips, holds or twists anything round, square, or hexagon up to one inch. Order your Plier-Wrench now.

AROUND AUTO

LOOSENING CAPS

STOPPING LEAKS

BENDING WIRE

If a dealer cannot supply you, order direct.

MONEY-BACK GUARANTEE

Noble & Westbrook Mfg. Co., Hartford, Ct.

FOR HARD-TO-REACH PLACES

Sales Agents Write for Special Discount

21 Jewels!

$1 DOWN

Nothing less than 21 Ruby and Sapphire jewels is good enough for the Burlington masterpiece.

Quality and Style

Adjusted to second—temperature isochronism—positions, 25 year gold strata case, in 100 designs. Unsurpassed quality, rock-bottom prices. $1 down brings your choice. Balance in small monthly sums.

Send for FREE Book Write today for FREE Burlington Watch Book

Find out about this big special offer made for a limited time!

Burlington Watch Company Dept. B-135
19th Street and Marshall Boulevard Chicago, Illinois

Copyrighted material

SERVISTEEL TAP AND DIE SET, ONLY $3.75

FOR THE HOME—THE FARM—THE WORKSHOP

Our No. 32 Automobile Set furnished in our highly finished chestnut box contains 5 each taps and dies (1-4, 5-16, 3-8, 7-16 and 1-2"), in the S. A. E. thread, 1 die stock, and one tap and reamer wrench.

Our No. 31 Set is the same as No. 32 except that the thread is U. S. S. instead of S. A. E. You are purchasing a splendid set at a very low figure.

Send us your order at once and be one of our many satisfied customers. Let us also send you our circulars illustrating our full line of tools.

Worcester Steel Products Co., Dept. 40, 25 Union St., Worcester, Mass., U.S.A.

TURN WASTED TIME INTO MONEY!

Every Purchaser Finds Numerous Uses for the

Torit Acetylene Torch No. 13

Uses Acetylene only. No oxygen or air pressure is required. Tips suck in air. Simply connect to Presto auto tank, light gas, and the outfit is put to work. *Beats anything you ever tried for soldering, heating or light brazing.* Outfit consists of 4 tips for different kinds of work, soldering copper, 5 feet tubing, tank connection, and full instructions.

ST. PAUL WELDING & MFG. CO., *177 W. 3rd St., St. Paul, Minn.*

No better, neater cases made than the

GERSTNER TOOL CASES

for Machinists and Toolmakers

You will take pride in one.

Send a postal for free catalog.

H. Gerstner & Sons

419 Columbia St., DAYTON, OHIO

ALUMINUM SOLDER

SOLDERS ALUMINUM of any description. NO ACIDS OR FLUX NECESSARY. For home, shop and garage use. Your tool kit is not complete without HAMILTON LEAD CO. ALUMINUM SOLDER. (Name on every bar.) Send 25c for 2 six inch bars, or $1.00 for 9 bars; postpaid.

HAMILTON LEAD CO., HAMILTON, OHIO

Send 35c for an All-Work File to

FAYETTE R. PLUMB, Inc.,

4817 James St., PHILADELPHIA

SHOP FIGURING

can be quickly done on the Midget Slide Rule. It adds, subtracts, multiplies and divides fractions and decimals. Gives lettered and numbered drill sizes. Also gives size of drill to use for any size tap, with any thread. In addition to the above the "Midget" is a complete general purpose slide rule. Get one and become an expert with figures. Many shops have purchased these rules for their Machinists and Draftsmen. The engine-divided scales are on white celluloid, mounted on aluminum and are grease and waterproof. Diameter 4". Price with complete instructions, **$1.50.** Leather case **50c** extra, cash or C. O. D.

Satisfaction Guaranteed. Catalogue Free.

GILSON SLIDE RULE CO., Niles, Mich.

"019"

the drop-forged large capacity wrench

No broken jaws or sheared threads with this new Crescent Auto Wrench! It is made to last. Entirely drop-forged, including the jaw, it stands terrific strains. Covered by

The Crescent Guarantee

"Every Crescent Tool is guaranteed to be satisfactory in every respect—the purchaser to be the judge." The new 019 Auto Wrench is 9 inches long and opens to 3 inches. It is attractively polished.

Retail price 75c, at hardware and accessory stores.

CRESCENT TOOL COMPANY

Originators of the Crescent Wrench

210 Harrison St. Jamestown, N.Y.

CRESCENT TOOLS

Test these Tools at Our Risk!

Drive ½-in. chisel through 1½-in. machinery steel. Lock our wrench with any other wrench and bring pressure until one breaks. Drive rivet punch through auto frame. Cut shavings off axleshaft with bearing scraper. **If tools show slightest harm, return them.**

CORNWELL

Hand-Made Tools

Made of **finest Swedish Charcoal Process Molybdenum Steel,** from our famous Cornwell **secret formula.** Forged, heat treated and hardened and tempered in oil. **Made by hand.** NOT drop forged and case hardened.

Tools Like These Never Made Before

Mechanics amazed that such tools could be made. **Place trial order at our risk.** No other tools can stand these startling tests. Hundred thousand users.

Money-Back Guarantee

We replace any tool not standing astounding tests described in booklet. If you *ever* saw tools like these, **return your order and get your money back.**

Mail Coupon for Prices and Booklet

CORNWELL QUALITY TOOLS CO.,
Dept. L, Cuyahoga Falls, Ohio

Send me illustrated booklet with prices on full line of Cornwell Secret Formula Hand-Made Tools.

..... Occupation

Name.....

Address.....

City..... State.....

Copyrighted material

Diamonds Here at 60% of Market Price

Never in three quarters of a century have we offered such amazing bargains. Hundred of money-saving opportunities in latest Diamond Bargain List, equalling those shown here.

Here's why we can offer such remarkable values: This 75 year old firm—rated at over $1,000,000.00 capital—the largest and oldest diamond banking institution of its kind in the world has made loans on Diamonds, Watches, and other jewels in excess of $25,000,000.00.

Why Pay Full Prices
Costs Nothing to See

Thousands of unpaid loans, Must sell now. Diamonds, Jewels, Watches and other Gems of unusual qualities—at an entirely different price basis—viz: loan values not market values. *At our risk* we send you any bargain you wish for absolutely *free examination*. No red tape. No obligation. Don't buy unless satisfied you can not match the bargain at 60 per cent more. *Diamonds of desirable quality at $125 per carat.* Yes, some even lower priced—also, *finest gems obtainable* at higher per carat—but proportionately low bargain prices. Our bargains have guaranteed loan values also, unlimited exchange privilege at full prices.

Latest List Diamond Loans

Send at once for latest list. Thousands of unpaid loans and other special advantage bargains. Many from big cash deals direct with European diamond cutters. Every gem described in full detail with exact weight, color, quality, etc. Get details of Free Examination offer. No obligation. List is free.

MAIL COUPON NOW

Only Otherwise Post Office

Jos. DeRoy & Sons,
1934 DeRoy Bldg., Pittsburgh, Pa.

Without obligation, send me free, your latest Bargain List of Diamonds, Watches and other jewelry.

Name.....

Address.....

City.....State.....

fishermen

Fishing facts and hints. Tells how to compete in our annual $2,000 Fish-Photo contest. A postal gets it FREE!

get this book

SOUTH BEND BAIT COMPANY
3585 High Street South Bend, Ind.

Buy SPORT BODIES for FORDS at FACTORY PRICES!



This Model in Grey Prime **39.50**

Write for Circular B-1 Showing Other Models.

Sport Body Works, Aurora, Illinois

TIRES WITH 500 NAIL HOLES LEAK NO AIR

A new puncture-proof inner tube has been invented by a Mr. Z. W. Milburn of Chicago. In actual test it was punctured 500 times without the loss of air. This wonderful new tube increases mileage from 10,000 to 12,000 miles and eliminates changing tires. It costs no more than the ordinary tube. Mr. Z. W. Milburn, 331 West 47th St., Chicago, wants them introduced everywhere and is making a special offer to agents. Write him today.—Adv.

MOTORCYCLES

LESS THAN HALF COST

Ace, Indian, Cleveland, Harley-Davidson, Henderson Motorcycles and Sidecars, new, used and rebuilt. **Rider Agents Wanted.** Write for FREE trial offer, agent's free outfit and big bargain bulletin. **New American Bicycles** in different styles and colors. Write for illustrated catalog giving our money saving prices.

AMERICAN MOTOR CYCLE CO.
2047 W. Chicago Ave., Dept. 729, Chicago

SHAW MOTOR ATTACHMENT
MAKES YOUR BIKE A MOTORCYCLE!

A high grade 2½ H. P. motor attachment quickly clamped on any bike frame. Speed 4 to 40 miles an hour. 90 to 125 miles per gallon of gas. **Special Low Price Now!** Write today for Complete Description and Special Low Prices on SHAW Motor Attachments and the SHAW Complete Motorbicycle.

SHAW MANUFACTURING COMPANY
Dept. 37 Galesburg, Kansas

MOTORCYCLES



RELIABLE STANDARD MAKES that you can **DEPEND** on. Enjoy the glorious experience of going wherever you like—whenever you like. The price is within your means—35% to 50% less than others. These machines are slightly used, thoroughly overhauled or rebuilt. Send for catalogue.

MYEROW BROS.,
15 Berkeley St. Boston, Mass.

Ranger $5 a Month

Finest bicycle built—**44 Styles**, colors and sizes. Factory-to-Rider prices. **FREE** delivery, express prepaid on **30 Days Free Trial.** Cash or easy payments. Bicycles, **$21.50** and up.

Tires lamps, wheels and equipment at half usual prices. Send no money. Write today for big catalog, special factory prices, *free trial plan* and marvelous offers.

Mead CYCLE COMPANY DEPT. G-108 CHICAGO

Write today for free Ranger Catalog, factory prices and marvelous easy payment terms

"If I hadn't been all through it myself, I wouldn't have the assurance to say to you 'cheer up.'"

ERICKSON.

The Beginning—1892

Those who wear them say:

ERICKSON LEGS are Wonderful

because they do not chafe, overheat or draw end of stump.

If you have had a recent amputation send for new booklet on TEST LEGS for beginners.

E. H. ERICKSON CO.
38-A Washington Av. N.
MINNEAPOLIS · MINN.

Copyrighted material

Thompson BEATS the World on BOATS

BETTER BOATS at Lower Prices

The BEST that Skill and Experience can Produce

TWO BIG FACTORIES

Our complete line of 22 models offers you a variety to choose from. Prompt shipment from factory to you.

Catalog Free — Save Money — Order by Mail

Please state kind of boat in which you are interested.

THOMPSON BROS. BOAT MFG. CO.

423 Ellis Ave., PESHTIGO, WIS. (*Write to either Place*) 1223 Elm Street, CORTLAND, N.Y.

$75 to $150 WEEKLY

INSTANT WELD Welds Rubber Instantly. Better, quicker, and easier than vulcanizing. *Once on—always on.* No Heat or Cement required. Repeat orders sure. Big profits. Appoint sub agents. Write today

TOURISTS PRIDE MFG. CO.
Desk No. 40G Minneapolis, Minn.

DOES YOUR BOAT LEAK?

Send for our Booklets, "How to make Your Boat Leakproof," and "Marine Glue — What to Use and How to Use It."

JEFFERY'S MARINE GLUES IN ALL THE VARIOUS GRADES

Any old boat so long as the frames are in fair condition can be made watertight by following the instructions in the above booklets.

For sale by all Yacht, Boat and Canoe Supply Houses; Hardware, Paint and Oil and Sporting Goods Dealers.

L. W. FERDINAND & CO.
156 Keeseland Street Boston, Mass., U. S. A.

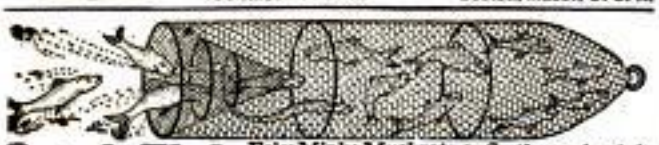

Catch Fish

Eels, Mink, Muskrats and other animals in large numbers, sure with our new folding, Galvanized **Steel Wire Traps.** They catch them like a fly-trap catches flies. Write for our **FREE TRAP** offer, bargain catalog of Fishermen's Supplies and Recipe for making best lure known for catching fish. **Agents Wanted.**

WALTON SUPPLY CO., Dept. A, ST. LOUIS, MO.

"Old Town Canoes" are strong, light and surprisingly steady. They are low in price, too. Right now is the time to place your order. Beautifully illustrated catalog mailed free on request. Send for it today. **OLD TOWN CANOE CO., 1567 Middle Street, Old Town, Maine.**

BEAUTIFY YOUR CAR!

PROMANCO Auto Frames all the rage! Adjustable. Add 100% to appearance of any car. Order TODAY. Postpaid $3.00. Money returned if not satisfied. DISTRIBUTORS. Fortune right men! Demand spreading like wildfire! Exclusive territory now. Write Dept. 44.

PRODUCTS MANUFACTURING CORP.
168 DARTMOUTH ST., BOSTON, MASS.

You-and This New Machine Can Earn $500 a Month

Operate a Tire Repair Shop

70,000,000 Tires in use. America's greatest opportunity for men with small capital. We furnish everything—$100 and up. **Easy payments.** We train you FREE right at home. Start making money at once. Write today for **Free Book of Opportunity.**

Haywood Tire Equipment Co. 1344 S. Oakley, Chicago

The greatest Evinrude ever built—*and that means the world's finest outboard motor.*

Not built for speed alone, for power alone, nor just for lightness. Created, instead, to perfectly combine these three ideals.

A revelation in eager power and smooth speed; an achievement in handy operation—quick to start, reverses instantly, easily set for slow trolling or racing speed to and from the fishing grounds. Light weight, too—yet not at a single sacrifice of strength.

The key to new pleasures in Vacationland—the new Evinrude Sport Twin. A true "1925 Champion"—named so because it *is.*

Automatic Instantaneous Reverse. Exclusive Evinrude feature. Just a lift of the tiller sends your boat astern. You don't take your eyes off the course ahead—you don't swing the motor even a fraction of an inch—you don't have to stop it and crank it backwards.

Automatic Tilt-Up. Another exclusive Sport Twin feature. When the propeller strikes an obstruction the motor tilts automatically—snubbing the shock and preventing damage to the boat, motor or propeller. *Yet motor locks rigid for starting.* No wobbling—no side-sway—just a straight line pull on the Easy-Starter and away you go.

Five more exclusive and "Champion" features—Super-Power Magneto, Power-Focus Drive, No-Clog Pump, Easy Portability and Auto-type Carburetor.

Write for copy of new 1925 "Evinrude Year Book." Know why more Evinrudes are in use than all other makes combined.

EVINRUDE MOTOR COMPANY
331 Evinrude Building, Milwaukee, Wisconsin

The New 1925 Champion
EVINRUDE Sport Twin

Copyrighted material

Bicycle Dealers Make Good Money!

ONLY small capital is needed to start. The business is clean, pleasant, profitable. Many successful men of today started their careers in the bicycle business.

You become your own boss, develop a well-paying business, and build for an independent future.

Bicycles are big sellers today everywhere. The profit is generous. Get started now—be prosperous.

Write for particulars to Dept. 252

CYCLE TRADES OF AMERICA, Inc.
35 Warren Street
NEW YORK

AUTO RUNS 57 MILES ON GAL. of "GAS"

A new automatic and self-regulating device has been invented by John A. Stransky, 481 Fourth st., Pukwana, South Dakota, with which automobiles have made from 35 to 57 miles on a gallon of gasoline. It removes carbon and reduces spark plug trouble and overheating. It can be installed by any one in five minutes. Mr. Stransky wants distributors and is willing to send a sample at his own risk. Write him today.

GET FACTORY PRICES ON GALVANIZED ROOFING

EDWARDS "REO" Metal Shingles

Corrugated

Absolutely rust-proof — edges as well as sides. Not the space of a pin point exposed to weather. Also fire and lightning proof. Reduce insurance. Outlast buildings. Need no repairs—end all roofing expense. Easy to lay—one man can do the work — hammer and nails only tools needed. Lay over old shingles if desired. Patent Interlocking Device makes water tight seams — all nail heads covered—no rust or leaks possible.

Patent Side Lock
No nail heads in sight or exposed to the weather

Exclusive "Tightcote" Process

Put all Edwards Galvanized Roofing to a class by itself. Bend, twist, strike it with a hammer as much as you like — you can't loosen or scale off the galvanizing — due to our "TIGHTCOTE" process which practically makes zinc covering a part of the metal sheet. No other galvanized roofing can withstand this test.

Brick Siding

FREE Roofing Book Don't buy roofing until you get our big free book, describing Edwards famous "Tightcote" Roofings, Sidings, and Ceilings, and our lowest factory prices. We sell you direct and save you in-between dealers' profits. Write for Roofing Book No. 250.

Low-Priced Garages

Lowest prices on Ready-Made Fire-Proof Steel Garages. Set up any place. Send postal for Garage Book showing styles.

THE EDWARDS MFG. CO.
700-750 Pike St. CINCINNATI, O.

Large Profits—Easy Sales

Handling "VAPO" Vaporizers

To Distributors and Agents selling the **"VAPO"** Vaporizer—a unique, automatic, patented device that gives **greatly increased motor power, reduces gas consumption 25% to 40%** (guaranteed) and WILL **remove carbon** by a simple operation. Installed on any motor without expense in a few minutes—no holes to drill. Money back guarantee. Very attractive sales proposition. Write for details and samples.

"VAPO" Specialty Company
P-450 North 12th St. Philadelphia, Pa.

AGENTS WANTED—To Sell HUGHES VALVE CAPS

Fastest selling article on the market today. Big profits with a minimum of effort. Retail price $1.25 per set of five.

Write at once to **Airlox Rubber Co., 2512 W. Monroe Street, Chicago**

DEAFNESS IS MISERY

I know because I was Deaf and had **Head Noises** for over 30 years. My invisible Antiseptic Ear Drums restored my hearing and stopped Head Noises, and will do it for you. They are Tiny Megaphones. Cannot be seen when worn. Effective when Deafness is caused by Catarrh or by Perforated, Partially or Wholly Destroyed Natural Drums. Easy to put in, easy to take out. Are "Unseen comforts." Inexpensive. Write for Booklet and **my sworn statement** of how I recovered my hearing.

A. O. LEONARD, Suite 226, 70 5th Avenue, New York City

MAKE YOUR Ford INTO THIS Sport Car—Save $50 to $150 with Red-i-Kut Life-Size Patterns

$5.00

Easy-to-Understand Instructions

Famous sure-fit *RED-I-KUT* life-size patterns and picture instructions show how you can easily convert your Ford into this **Fast, Saucy, Sport** Car as thousands have done, with easily obtained materials. No need to lay up the car. Rear seat folds making 4-passenger car. **Look at Wilfred Eno's.** Eno says: *"It took me 3 Sundays to build it and I sure am proud to hear them say, 'He built that swappy sport car.' I never cut any steel or did any woodwork before but one can't go wrong with Kuempel patterns."* St. Louis, Mo.

The **Lark life-size patterns** for each part of the body so you can't go wrong, picture instructions and **CONICAL DISK WHEEL PATTERNS.** Only $5.00 delivered. 54 extra brings patterns for *Side* Top and Gasoline windshield. 22 gage **RKO Steel for Lark** $10 complete. Extreme West $13. Order **now** while we can make good delivery, and really enjoy these wonderful days in your **Lark. Keen, Classy, Up-to-the-minute. You can build it. Over 11,000 in use. Don't hesitate. "Swing Le" Underslung Irons, no frame cutting kind. $6.50. Only $4.99 when ordered with Lark patterns.** *Send 5c coin for new manual of other distinctive sport body patterns from $7.50 up—"RKO," Steel "Swingle" Irons, Tops and Windshields. ORDER RIGHT NOW.*
KUEMPEL CO., 62 Kuempel Bldg., Guttenberg, Iowa

The "Lark" *Class — Snap*

Copyrighted material

A New TOP for your car

Order from factory SAVE $15.00

Prices as Low as $4.90

Why pay a high price to have a New Top put on your car? Recover it yourself very easily, and save $15.00. Just send name, year and model of car. We make Top **to order** and send it to you with complete simple instructions. It's a snap and will

Make Your Car Look New

Improves appearance of car 100%. Greatly increases its value. No middleman's charges—that's why we can ship direct to you at an amazing saving.

Write for FREE Style Book

showing money-saving prices on tops and other Auto accessories. Samples free.

BUOB & SCHEU, Dept. A-7, CINCINNATI, OHIO

For Your Boat

Elto Ole Evinrude's New Quick Detachable ROWBOAT MOTOR

Easily carried. Quickly attached to any boat (without tools). Drives boat any speed, 2 to 10 miles per hour. No rowing, no work, no bother.

Fast—Light—Powerful Easy to Carry

Has 12 exclusive features, all described in our new Free Catalog. Write for it today.

Elto Outboard Motor Co.
Manufacturer's Home Bldg.
Dept. AA
Milwaukee, Wis.

Elto—The Motor that Starts with a Touch

FREE **Book of Newest Styles** just out. Women's, men's, children's clothing *on credit* and at *bargain prices*, less than cash prices everywhere. Very latest fashions; best materials. Open a charge account with us. Buy *on credit* and *save money!* Dress in newest styles. Send for Style Book absolutely FREE *today!* Elmer Richards Co., Dept. B-177, W. 35th Street, Chicago

---

AGENTS EARN A GOOD INCOME

You can sell Premier Knife Sharpeners to housewives, restaurants, stores, etc. 9 out of 10 will buy. Sells for 50c. *Write today for attractive offer.* PREMIER MFG. CO. Dept. 29 Detroit, Mich.

LARGE PROFIT for you

FREE 1000 Illustrations **ELECTRIC FIXTURE CATALOG!**

Write today for your copy. Save 50% direct from Manufacturer. No Middleman's Profit. OUR SPECIAL: 8 Room Electric Set, ready to hang, $24.50—Other bargains.

UNITED LIGHTING FIXTURE CO.
280 Bowery Dept. P New York

Build and Fly Model Aeroplanes

Build your own Model Aeroplane; make trial flights and learn the principles of Aeronautics. IDEAL Scale Drawings and Building and Flying Instructions help you build expert 3 ft. duplicates of any of the following well-known Planes. Send 25c now for complete Plans for the one you want to build.

De Havilland Battle Plane; Curtiss JN4D-2 Training Plane; NC-4 Naval Seaplane; Curtiss Military Tractor; Blériot, Nieuport or Taube Monoplane; also Cecil Peoli Racer; 25 cents each, postpaid. *Catalogue IDEAL Model Aeroplanes and Supplies, 5c postpaid.*

"EVERY-BOY'S" Airplane clips together without nails, wire or screws. Ready to fly in 2 hours. The newest idea. Send 5c for catalogue and find out about it.

IDEAL AEROPLANE & SUPPLY CO., 408 West Broadway, corner Spring St., NEW YORK

WATERWAY Vacations D&C LAKE LINES

MAKE YOUR VACATION *a* HEALTH *investment*

CHICAGO

MACKINAC ISLAND *The Summer Wonderland*

DETROIT

CLEVELAND

BUFFALO

NIAGARA FALLS *America's Scenic Wonder*

Mackinac Island, the land of rest and beauty, is calling to every vacationist. It is a summerland of charm and freshness. Plan now to take your vacation via the D. & C. Waterway.

BETWEEN DETROIT and BUFFALO—2 new mammoth liners, "Greater Detroit" and "Greater Buffalo," largest liners of their type in the world, Lv. Detroit 5:30 p. m. and Buffalo 6 p. m. daily, Eastern time. Low rates—$6 one way, $11.50 round trip.

BETWEEN DETROIT and CLEVELAND — the giant liners "City of Detroit III" and "City of Cleveland III" Lv. Detroit and Cleveland daily 11:30 p. m. Eastern time. Fare—$3.60 one way, $6.50 round trip. Daylight trips during July and August, Tues., Thurs., Sat. Lv. 10:30 a. m. Eastern time.

BETWEEN DETROIT, MACKINAC ISLAND, ST. IGNACE, and CHICAGO—From June 25th to Sept. 7th liners Lv. Detroit Tues., Thurs. and Sat. 1:30 p. m. Eastern time. Lv. Chicago Mon., Thurs. and Sat. 12:30 noon, Central time.

BETWEEN PORTS	Round Trip Fares including Lower Berths and Meals		
	1 person	2 persons	3 persons
Detroit to Mackinac Is.	$33.25*	$ 64.50	$ 93.75
Detroit to Chicago	48.50**	133.00	193.50
Chicago to Mackinac Is.	35.25*	68.50	99.75

*Upper berths $2 less. **Upper berths $4 less.

For reservations make application to E. G. Stoddard, Gen. Pass. Agt., Detroit, Mich. Parlors extra. Rail Tickets accepted on all divisions except Chicago and Mackinac Island. Autos carried. Wireless aboard all liners. May we send you a beautiful illustrated pamphlet upon receipt of 2 cents?

Schedules subject to change without notice.

Detroit & Cleveland Navigation Company

A. A. Schantz, Pres. and Gen. Mgr.

J. T. McMillan, Vice-Pres.

D&C LAKE LINES

Please Mention Popular Mechanics

Copyrighted material

Broadcasting Happiness

One very important factor in the revival of harmonica music is the radio. From the leading radio stations of the country amateur and professional players are broadcasting happiness to millions with the aid of that popular musical instrument—the Hohner Harmonica.

"Tune in" with the harmonica programs for entertainment, education and inspiration. Enjoy the cheerful melodies broadcast by boys and girls of school age—the operatic, classical and jazz selections of the harmonica orchestras and professional soloists; then get a Hohner Harmonica—50c up—and a Free Instruction Book. If your dealer is out of copies, write M. Hohner, Inc., Dept. 181, New York City.

If you want a real musical treat ask to hear Vocalion Record No. 14865, by Moore & Freed

HOHNER HARMONICAS

"BOW LEGS and KNOCK-KNEES" UNSIGHTLY

SEND FOR BOOKLET SHOWING PHOTOS OF MEN WITH AND WITHOUT THE PERFECT LEG FORMS

PERFECT SALES CO.

140 N. Mayfield Ave., Dept. S, Chicago, Ill.

Would You Like to Make $5,000 A YEAR?

I want reliable people in every town to demonstrate and show my famous designs in **House, Porch and Street Dresses.**

No Capital or Experience Necessary

FREE
3 Beautiful Dresses are given you on my liberal plan

I do all collecting, delivering, etc., by mail and pay you every week. It's easy to make $50 or $60 a week right from the start, and you can expect to double your earnings every six months in this new, high class business which is permanent. Write me today to be sure to be first in your locality to get this exclusive opportunity.

Carol Lee, 1624 Gateway Station, Kansas City, Mo.

SEND ONLY

T.M. Reg. **10¢** .25

To Help Cover Cost of Handling. We Will Send You A ONE CARAT—FULL CUT

Corodite Diamond

NOTHING MORE TO PAY

NO C.O.D.—NOTHING TO BUY OR SELL
NO STRINGS ATTACHED TO THIS OFFER

We make this remarkable offer so that every lover of beautiful jewelry can have the opportunity of comparing a **Corodite Gem** *side by side* with a **Genuine Diamond.** We want you to see with your own eyes the **fiery flashing beauty** of this **Gorgeous Gem. CORODITE DIAMONDS** are *double polished* and have the *true diamond* (32 facet) *cut.* So closely do they resemble the genuine that even lifetime experts are astonished. *The illustrations above show how beautiful a CORODITE looks when mounted in a ring.* **Send your name and address and 10c** in coin or stamps (to help cover cost of handling) to us **Today.** Your **Corodite** will come **Fully Prepaid** by return mail.

E. RICHWINE CO. Dept. A-10, 19 W. Jackson Blvd. CHICAGO, U. S. A.

SEND FOR THE INTERNATIONAL CATALOG

Our net price list. Full line of auto bodies and accessories for Fords at *Wholesale Prices.* Save big money on bodies by buying Direct from Factory.

FOR FORD—Prices from $27.85 up. Factory to consumer direct—Pay Only One Profit.

International Body Works, 914 W. Ohio Street, Dept. 7, Chicago, Illinois

Cal. 30

U.S. ARMY KRAG CARBINES

All Carbines have the new model 1898 stocks. The barrels, actions and parts are either new or have been refinished by the Government and equal to new..... **$15**

Krag-Rifles.....	$12.50	Krag Sporting Rifles...	$14.00
Sprgfld. 45 Shot Guns.	4.50	Sprgfld. 45 Carbines....	3.50

AND OTHER ARMS. *SEND FOR CATALOG.*

W. STOKES KIRK 1627-PM, North 10th Street **Philadelphia, Pa.**

Clear-Tone FOR PIMPLES

Your skin can be quickly cleared of Pimples, Blackheads, Acne Eruptions on the face or body, Enlarged Pores, Oily or Shiny Skin. **$1,000.00 Cold Cash says I can clear your skin of the above blemishes.** WRITE TODAY for my FREE Booklet—*"A Clear-Tone Skin"*—telling how I cured myself after being afflicted for fifteen years.

FREE

E.S.GIVENS, 129 Chemical Bldg., Kansas City, Mo.

Copyrighted material

COUNTER Eveready SALESMAN

MAKES YOU $5,000 A YEAR

Scores of men making $5,000 a year and more, EVEREADYS in big demand in confectionery, drug, grocery, cigar stores, waiting rooms, newsstands, hotels, cafeterias, restaurants, poolrooms, barber shops, soft drink parlors, etc.

WE GUARANTEE AGENTS

100% to 150% profit on every deal. $12 initial investment starts you—buys 12 Eveready (with sales-attracting bell attachment, 25c each extra). Complete investment averages from $100-$200, depending on number of EVEREADYS put out. Profits quickly pay back your investment. Sell or lease EVEREADYS, then keep merchants supplied with stock (salted peanuts, candies, nut meats, etc.) Daily repeat orders. Our contract with big nut-meat specialty house enables you to buy all your supplies wholesale—in separate bags or bulk.

(*Patent applied for*)

WHOLE OR PART TIME

Volume business and big profits in short time. Steady business. Nothing else like EVEREADY—automatic—easy refill—no books, clips or stickers. *Hurry*—ACT NOW—for exclusive rights in your community.

THE INTERSTATE CO., 2400 E. 9th Pl., CLEVELAND, O.

(*References: Midland Bank, Cleveland*)

Dealers: If no "Eveready" distributor has called—remit $1.90. 10 days must prove claims or return device—money back.

NEW VEST POCKET ADDING MACHINE

Adds as rapidly and accurately as a $300 machine, yet fits the vest pocket. Mechanically perfect. Easy to operate. Everyone who uses figures should own one.

$2.95

COUNTS UP TO 999,999,999

Total visible at all times. A pull of the finger clears it. Don't carry a pocket full of pencil stubs and scrap paper to do your figuring. Carry a Ve-Po-Ad.

10 DAYS TRIAL **SEND NO MONEY.** Just name and address and we will send machine postpaid. Pay postman on delivery $2.95. Use it for 10 days to prove it does all we claim. If not perfectly satisfied we will refund your money. Limited supply. Order **today.**

RELIABLE ADDING MACHINE CORP., Dept. 4-A
184 West Washington Street, CHICAGO, ILL.

AGENTS Here's a money maker for you. Everybody wants one. Splendid profit. Write for special offer. DO IT NOW.

Tire AGENTS WANTED

Use and Introduce MELLINGER CORD TIRES

15,000 MILES GUARANTEED Lowest Wholesale Prices in America. Shipped prepaid on approval. Make big money all or part time. No capital or experience. Sample sections furnished.

YOUR TIRES FREE! Simply send name today for valuable FREE BOOK; tells how thousands have gone into big business. SPECIAL AGENTS' OFFER. Wholesale Prices and FREE SAMPLE KIT. Write nearest address.

MELLINGER TIRE & RUBBER CO.
PHILADELPHIA, PA. Dept. 1919 KANSAS CITY, MO.

Make Keys at Half Cost

Anyone can make **perfect** duplicates of **any** Yale, Corbin, Sargent, Russell and Erwin Chicago Lockwood, etc., type **key** in less than **one** minute, without change of cutter, without injury to original; also flat steel **cabinet** lock keys with square notches, with Precision Key Machine. No experience **needed.** Works automatically. Hundreds in **use.** Guaranteed. Money back if not satisfactory. Price $35.00 complete.

PRECISION MACHINE & TOOL CO.
423 Commonwealth Building, Allentown, Pa.

Insist on *Bostons* and get

The Pad without a Pucker

No metal on face of pad, lies flat.

The Oblong Rubber Button

An Exclusive Feature of all Velvet Grip Garters.

For Sports Wear—Knicker Bostons

They keep sport stockings secure and free from slovenly wrinkles. Made in heathers, plain and variegated colors in appropriate sizes for men, women, boys, and girls.

George Frost Company, *Makers*, Boston

To Europe, Orient, etc.

from all U. S. Ports for men and women. Sea experience unnecessary. Good pay. Healthy life. Fine prospects. Send self-addressed envelope for list. *Write:* **Box 336-X, Santa Monica, Calif. or Box 122-X, Mount Vernon, New York**

BARGAINS

We Are Closing Out All of our U. S. Army Goods—Get Our List

Order Today

95c

These are the genuine Creaghe-Osborne Marching Compasses which were made for the army by the Sperry Gyroscope Co., N.Y., at a cost of $24.50 each.

Sale Price 95c Postage 20c Extra

All goods sold subject to your examination

GENERAL CAMP OUTFITTERS

MICHIGAN TENT & AWNING CO.
1753 LYSANDER ST. DETROIT, MICH.

WADE BENCH LATHE

AMATEUR MECHANICS, MODELMAKERS, INVENTORS, STUDENTS

A real machine tool for the home work bench—capacity 4" dia. x 12" length. For **Metal—Wood—Composition Materials**—Turning—Facing—Boring—Drilling—Winding—Thread Cutting. **Accurate—Strong—Quiet—Compact.** Slide-rest has travel entire length of bed. Leadscrew inside bed. **Price for Lathe, $28.00.** Complete line of accessories at equally low prices. Write for interesting free literature.

THE GEROLD CO., Dept. P-12, 120 Liberty St., New York

Copyrighted material

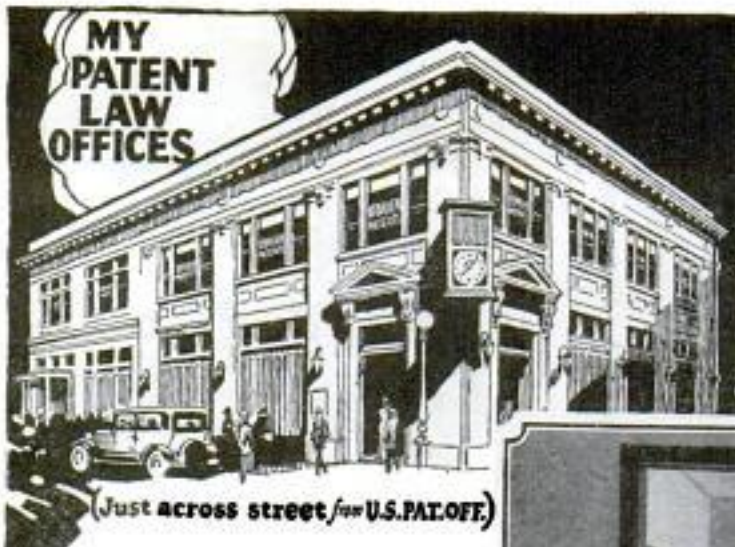

(Just across street from U.S.PAT.OFF.)

PA Inventors·

At the right is a view of my drafting and specification offices where a large staff of experienced experts are in my constant employ. All drawings and specifications are prepared under my personal supervision.

Take the first step Today to protect your Ideas

Delays are Dangerous, Action Counts

If you have a useful, practical, novel idea for any new article or for an improvement on an old one, you should communicate with a competent Registered Patent Attorney AT ONCE. Every year thousands of applications for patents are filed in the U. S. Patent Office. Frequently two or more applications are made for the same or substantially the same idea (even though the inventors may live in different sections of the country and be entirely unknown to one another). In such a case, the burden of proof rests upon the last application filed. Delays of even a few days in filing the application sometimes mean the loss of a patent. So lose no time. Get in touch with me at once by mailing the coupon on the opposite page.

Prompt, careful, efficient service

This large, experienced organization devotes its entire time and attention to patent and trademark cases. Our offices are directly across the street from the U. S. Patent Office. We understand the technicalities of patent law. We know the rules and requirements of the Patent Office. We can proceed in the quickest, safest and best ways in preparing an application for a patent covering your idea. Our success has been built on the strength of careful, efficient, satisfactory service to inventors and trademark owners located in every state in the Union.

Clip this Coupon and Mail

Copyrighted material

TENTS

write for these FREE books

No Charge for Information on How to Proceed—

The books shown here contain valuable information relating to patent procedure that every inventor should have. And with them I will also send you my "Record of Invention" form, on which you can sketch your idea and establish its date before a witness. Such evidence may later prove valuable to you. Simply mail the coupon and I will send you the books, and the "Record of Invention" form, together with detailed information on how to proceed and the costs involved. Do this NOW. No need to lose a minute's time. The coupon will bring you complete information *entirely without charge or obligation.*

Strict Secrecy Preserved

All communications, sketches, drawings, etc., are held in strictest confidence in strong, steel, fireproof files, which are accessible *only* to authorized members of my staff. Feel free to write me fully and frankly. Your case will have my personal attention. It is probable that I can help you. Highest references. But FIRST—clip the coupon and get my free books. *Do THAT right now.*

Clarence A. O'Brien

Registered Patent Attorney

Member of Bar of: Supreme Court of the United States; Court of Appeals, District of Columbia; Supreme Court, District of Columbia; United States Court of Claims.

Practice confined exclusively to Patents, Trademarks and Copyrights.

CLARENCE A. O'BRIEN
Registered Patent Attorney
7093 Security Savings & Commercial Bank Building, Washington, D. C.

Please send me your free books, "How to Obtain a Patent," and "Invention and Industry," together with your "Record of Invention" form, without any cost or obligation on my part.

Name.....

Address.....

.....

(Important: Write or Print name clearly)

It NOW!

Copyrighted material

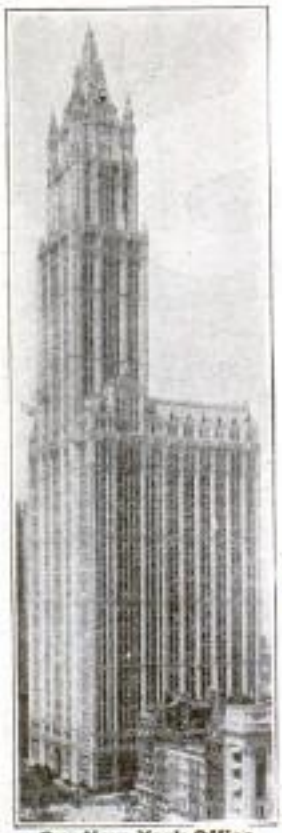

Our New York Office
Suite 1007 Woolworth Bldg.

Our Philadelphia Office
Suite 714-15 Liberty Bldg.

Our Washington Office
Victor Building

PATENTS TRADE-MARKS AND COPYRIGHTS

Have You An Idea?

Our Offer: FOR THE PROTECTION OF YOUR INVENTION

YOUR FIRST STEP

Before disclosing an invention the inventor should write for our blank form

"RECORD OF INVENTION"

This should be signed and witnessed and returned to us together with model or sketch and description of the invention for

INSPECTION and INSTRUCTIONS

No Charge for the Above Information

Our Four Books Mailed Free to Inventors

Our Illustrated Guide BOOK

How to Obtain a Patent

Contains full instructions regarding U. S. Patents. Our Methods, Terms, and 100 Mechanical Movements illustrated and described.

Our Trade Mark Book

Shows value and necessity of Trade Mark Protection. Information regarding *Trade Marks and unfair competition in trade.*

Our Foreign Book

We have Direct Agencies in Foreign Countries, and secure Foreign Patents in shortest time and lowest cost.

Progress of Invention

Description of World's Most Pressing Problems by Leading Scientists and Inventors.

We Regard a Satisfied Client as our best advertisement, and furnish anyone, upon request, lists of clients in any state for whom we have secured patents.

Highest References—Prompt Attention —Reasonable Terms

VICTOR J. EVANS & CO.

PATENT ATTORNEYS

Main Offices: 956 9th St., N. W., Washington, D. C.

Opposite U. S. Patent Office

Copyrighted material

PATENTS TRADE-MARKS AND COPYRIGHTS

IMPORTANT

Do not submit your invention to anyone before you furnish proof that the invention is patentable or application has been filed. IN ORDER TO HAVE YOUR CASE MADE SPECIAL TO AVOID DELAY YOU SHOULD TAKE THE PRECAUTION OF HAVING YOUR CASE MADE SPECIAL IN OUR OFFICE to secure protection, save correspondence and secure early filing date in Patent Office. To secure special preparation of your case send $25.00 on account with model, sketch and description.

MAIN OFFICE, VICTOR J. EVANS & CO.—VICTOR BUILDING, WASHINGTON, D. C.

All Communications and Data Strictly Confidential. Interference and Infringement Suits Prosecuted

OUR ORGANIZATION OFFERS PERSONAL SERVICE By Experienced Patent Solicitors and Draftsmen

Our Chicago Office
Suite 1114 Tacoma Building

Our Pittsburgh Office
Suite 514 Empire Building

Our San Francisco Office
Suite 1010 Hobart Building

FREE COUPON

VICTOR J. EVANS & CO.
PATENT ATTORNEYS

NEW YORK OFFICES 1007 Woolworth Bldg.
CHICAGO OFFICES 1114 Tacoma Bldg.
PHILADELPHIA OFFICES 714-715 Liberty Bldg.
PITTSBURGH OFFICES 514 Empire Bldg.
SAN FRANCISCO OFFICES Hobart Bldg.

MAIN OFFICES: 956 9th Street, N. W., WASHINGTON, D. C.

Gentlemen: Please send me *Free of Charge* your books as described on preceding page.

Name.....

Address.....

Copyrighted material

PATENTS

TRADE MARKS · DESIGNS · FOREIGN PATENTS

MUNN & CO.

PATENT ATTORNEYS

Associated since 1846 with the Scientific American

672 WOOLWORTH BUILDING
New York City

523 SCIENTIFIC AMERICAN BLDG.
Washington, D. C.

412 TOWER BUILDING
Chicago, Ill.

365 HOBART BUILDING
San Francisco, Cal.

220 VAN NUYS BUILDING
Los Angeles, Cal.

Books and Information on Patents and Trade Marks by Request. Associates in All Foreign Countries.

Have You An Invention?

If so the WORLD PROGRESS will show you how to

PROTECT AND PROFIT FROM YOUR IDEAS

Sample copy free. One year's subscription **$1.00.** Send for free book,

"WHAT TO INVENT"

containing SUGGESTIONS TO INVENTORS as to Inventions Needed. We invite manufacturers to address us regarding inventions they want.

WORLD PROGRESS PUB. CO., Inc.
Room 203 Victor Bldg. WASHINGTON, D. C.

SARGENT PLANES

See them at your hardware store.
Write for booklet.
SARGENT & CO., 49 Water Street, New Haven, Conn.

Models and Experimenting

Let Us Design and Build Your Models Complete

WOOD—METAL PATTERNS
CASTINGS—MACHINE WORK

Established 25 Years

McDERMOTT PATTERN AND MODEL WORKS
231-233 West Grand Ave. CHICAGO, ILLINOIS

PATENTS

C. L. PARKER
Formerly Member Examining Corps, U. S. Patent Office
PATENT LAWYER
McGILL BLDG.
WASHINGTON, D. C.

Patents, Trade Marks, Copyrights, Patent Litigation

Handbook for Inventors, "Protecting, Exploiting and Selling Inventions," sent free upon request.

PATENTS

Booklet Free Highest References
Promptness Assured Best Results

Send drawing or model for preliminary examination of Patent Office records.

ALL BUSINESS GIVEN PROMPT AND PROPER ATTENTION

Listed Patent Lawyer in the latest editions of the Rand-McNally Directory of Bankers and Attorneys, of Chicago, Ill.; The Baggott & Ryall Directory of Attorneys, New York City; the United Lawyers' List of Attorneys, published in Chicago, Ill.; The Lawyers and Bankers Quarterly, published by the Legal Directory Publishing Company of St. Louis, Mo.; the American Lawyers Annual, Cleveland, Ohio.

WATSON E. COLEMAN,
REGISTERED PATENT LAWYER

644 G Street, N. W., Opp. U. S. Pat. Office
WASHINGTON, D. C.

Copyrighted material

U.S. PATENTS

DON'T LOSE YOUR RIGHTS
TO PATENT PROTECTION

Before disclosing your invention to anyone send for blank form **"EVIDENCE OF CONCEPTION"** to be signed and witnessed. A sample form together with printed instructions will show you just how to work up your evidence and establish the same before filing application for patent. As registered patent attorneys we represent hundreds of inventors all over the United States and Canada in the advancement of inventions. Our schedule of fees will be found reasonable. The form "Evidence of Conception," sample, instructions relating to obtaining of patents and schedule of fees sent upon request. Ask for them—a post card will do.

PATENTS AND TRADE MARKS

LANCASTER & ALLWINE

Registered Patent Attorneys in U. S. and Canada.

480 Ouray Bldg., WASHINGTON, D. C.

Originators of forms "Evidence of Conception."

PATENTS

To the Man with an Idea

I offer a comprehensive, experienced, efficient service for his prompt, legal protection and the development of his proposition.

Send sketch, or model and description, for advice as to cost, search through prior United States patents, etc. Preliminary advice gladly furnished without charge.

My experience and familiarity with various arts frequently enable me to accurately advise clients as to probable patentability before they go to any expense.

Booklet of valuable information and form for properly disclosing your idea free on request. Write today.

Richard B. Owen, Patent Lawyer
9-303 Owen Building, Washington, D. C.
41-E Woolworth Bldg., New York City

BLUE BOOK ON PATENTS

gives instructive information and candid advice.
MONROE E. MILLER, PATENT LAWYER
411-2 Ouray Building WASHINGTON, D. C.
ELECTRICAL AND MECHANICAL EXPERT

FREE Book on Deafness

Write *today* for 168 page FREE book giving full particulars and testimonials from hundreds of grateful users whose hearing has been restored by use of our *"little wireless phones for the ears."*

Wilson Common-Sense Ear Drums
require no medicine but effectively replace what is lacking or defective in the natural ear drums. They are simple devices, which the wearer easily fits into the ears where they are invisible. Soft, safe and comfortable.
WILSON EAR DRUM CO., Incorporated
976 Inter-Southern Bldg. LOUISVILLE, KY.

PATENTS

Send us sketch or model for advice and exact cost of patent. Our book **"How to Obtain a Patent"** sent free. It tells how to apply for Patents, Trade Marks, Foreign Patents, Copyrights, etc.; gives information on Patent Procedure; tells what every inventor should know. Thousands of Inventors, who are our clients, are our reference.

CHANDLEE & CHANDLEE, 25 Years' Experience
473 7th St. Washington, D. C.

Inventor's Universal Educator

Contains 900 mechanical movements; 50 perpetual motions. Tells how to obtain and sell patents. Suggests new ideas. Explains how to select your attorney and avoid patent sharks. Special price (for a limited time)..... **$1.00 Postpaid**

ALBERT E. DIETERICH, 621-A Ouray Bldg., Washington, D. C.

INVENTORS PROTECT YOUR IDEAS

Send for our Guide Book, **HOW TO GET A PATENT,** and Evidence of Invention Blank, sent Free on request. Tells our terms, methods, etc. **Send model or sketch and description of your invention for INSPECTION and INSTRUCTIONS FREE. TERMS REASONABLE. BEST REFERENCES.**

RANDOLPH & CO.
300 Victor Bldg., WASHINGTON, D. C.

NAME _____

STREET _____

CITY _____ STATE _____

Copyrighted material

For Good Summer Radio Reception *use* JEFFERSON TUBE REJUVENATOR *keeps tubes like* NEW

DON'T blame the weather for all summer radio troubles. . . . How are the tubes? All tubes, remember, grow weak with use—especially in summer when operated at higher voltage. Bring them back to full efficiency with the Jefferson Tube Rejuvenator! Takes only 10 minutes; attach to a convenient electric light socket. Used once a month, it DOUBLES and TREBLES the life of tubes! Quickly pays for itself in saving of tubes and batteries. It's wasteful to be without one; it's economy to own one. *Fully guaranteed.* At leading stores selling radio supplies. If your dealer can't supply you, send $7.50 to

Jefferson Electric Mfg. Co., 501 So. Green Street, Chicago, Ill.

Makers of Jefferson Radio, Bell Ringing and Toy Transformers; Jefferson Spark Coils for Automobile, Stationary and Marine Engines; Jefferson Oil Burner Ignition Coils and Transformers.

For Home Use

Patent Pending

$7.50

$10 in Canada

Takes large or small tubes—
201-A, 301-A, UV-199, C-299

Summer static

Now overcome by volume

Static is diminished in proportion to the amount of volume which a radio set delivers, experts agree. Kellogg transformers give volume with added clarity of tone.

The Kellogg radio frequency transformer is of the low loss type, having many important features. It will operate at all wavelengths with .00035 to .0005 variable condensers. For best results, use the Kellogg .0005 low loss variable condenser. Kellogg R. F. Transformers at all dealers $2.35.

Kellogg Audio frequency transformers give greater volume with clearer reproduction, due to the high quality materials and expert workmanship, used in the Kellogg process of manufacture. Kellogg audio frequency transformers are made in both shielded and unshielded types ranging in price from $3.50 to $4.50.

Kellogg transformers can be obtained at all radio dealers.

KELLOGG SWITCHBOARD & SUPPLY CO.
1066 W. Adams St., Chicago, Ill.

AGENTS NEW SPARK PLUG

Visible Flash

Just Out—Amazing Invention—**Beacon Lite** Spark Plugs. You see the flash of each explosion in the cylinders. Tells which are firing right. Greatest improvement in spark plugs since gas engines were invented. Wonderful gas savers. Agents coining money.

$90 A WEEK Easy to make with new sure-fire plans. Sells on sight to every auto owner. Phillips, Ont., writes "Sold 2 dozen today, 3 dozen yesterday. Rush 10 dozen." Write for special **Free** Demonstrator Offer and FREE deal to introduce these wonder spark plugs in your territory. Write quick—**today.**

CENTRAL PETROLEUM COMPANY
667 Century Building Cleveland, Ohio

SHOW IT—and IT'S SOLD

The Handy Knife Sharpener is the fastest selling home necessity ever offered.

Everyone a prospect. Sells for $1.00, your profit 65c. Free deliveries. Guaranteed.

Morgan Mfg. Co., Dept. G, 443 S. Dearborn, Chicago

$250.00 A WEEK!

Made with the new and improved "Krispy" Potato Chip Outfit.

Potato Chips the lunch of the hour. Everybody is eating them. One stand in small building sells $100 worth in a week. Think of it! Grocers, druggists, pool rooms, cigar stands, tourists' counters, parks—all sell thousands of packages. Supply them. Get the big profits. Chips easily, quickly made at home. No experience necessary. Write today. Get in a big profit fast growing business now.

SERVICE & EQUIPMENT CO., 905 Hoag St., Toledo, Ohio

Sells for $1.25. Agent's Sample 65c!

New Self-Filling Bamboo Fountain Pen with Stylo Point

Guaranteed for 1 year
"It makes Carbon Copies"
Hustlers Making $20 Daily

Money refunded if you don't think it's the best pen you ever wrote with. Just out. Comes in beautiful brown trimmed in black. Send for wholesale quantity price list and distributing plans.

F. SPORS & CO., 337½ Main St., Lasueur Center, Minnesota

Copyrighted material

I Want 700 Agents

At $90.00 a week

Men and Women! Write me today and by this time next week I can place you in a position to make $2.00 to $5.00 an hour in your spare time, up to $15.00 a day full time. Thousands of our representatives are making that and more with our **New Plans.** Simply introduce and take orders for famous **World's Star Hosiery and Underwear** sold direct from mill to home—a complete line for whole family. Permanent customers and repeat orders make you steady, big income. No delivering or collecting. No capital required.

Write Quick It's a chance to make thousands of dollars. Your profits begin at once. Exclusive territory. No experience needed. Write today and I'll send all facts and tell how to start **Free.** *(Established 29 years.)*

World's Star Knitting Co.
277 Lake Street Bay City, Mich.

Make Your Own Casing Repairs This New Way

You can now fix casing holes in less than 2 minutes without the aid of heat or equipment of any kind besides that furnished with this Kit. To introduce PLU-GUM we are offering both the casing repair outfit with needle and enough plugs for eight casing repairs and also the tube repair outfit consisting of a roll of rubber patches, tube of cement and metal scraper. **$1.25**
Both for the single price of.....
Send this amount with your order or pay postman on delivery if you prefer. *Money back if not 100% satisfied.*

Address: PLU-GUM,
314 Monadnock Block, CHICAGO

SALESMEN WRITE!

WONDERFUL INTRODUCTORY OFFER

5 new model Ford sport, racing bodies

to be sold at our own cost price— $20 up

Underslung fixtures
Overhead valves
Come in Today and inspect our new model bodies; also completely assembled underslung speedsters, $95 up. Large variety — low prices — immediate deliveries.
N. M. FORDSPEED BODY MFRS., 250 West 54th St., NEW YORK

REMINGTON
PORTABLE TYPEWRITER
Dealers and Branches Everywhere

NEW HOME TREATMENT FOR GLAND TROUBLE

Medical authorities agree that 65% of all men past middle age (many much younger) are afflicted with a disorder of the prostate gland. Aches in feet, legs and back, frequently nightly risings, sciatic pains, are some of the signs—and now, a member of the American Association for the Advancement of Science has written a remarkably interesting Free Book that tells of other symptoms and just what they mean. No longer should a man approaching or past the prime of life be content to regard these pains and conditions as inevitable signs of approaching age. Already more than 20,000 men have used this amazing method described in this book to restore their youthful health and vigor—and to restore the prostate gland to its proper functioning. Send immediately for this book. If you will mail your request to the Electro Thermal Company, 2147 Main Street, Steubenville, Ohio—the concern that is distributing this book for the author—it will be sent to you absolutely free, without obligation. Simply send name and address. But don't delay, for the edition of this book is limited. (Western Office, Dept. 21 M, 711 Van Nuys Bldg., Los Angeles, Calif.)

WURLITZER

Couldn't Play a Note

Now Makes $100 a week!

"Bill Carola"
Landaus Serenaders

Read the story in his own words —

"When I sent for your catalog, I wanted a Tenor Banjo, but I hesitated a long time as I didn't know a note of music. I finally decided to try it a week, as you offered, and at the end of that time I found I could pick a few notes. Then I started the correspondence course you furnished, and in seven months, even before the final payments on the Banjo were due, I had taken my place in a professional orchestra. Now I am making $100 a week, three times what I made as a clerk. Two of my friends made money with their instruments after five months practice, one a drummer and the other a saxophonist, and neither could play a note when he started. I wish everybody knew how easy it is — anyone who can whistle a tune can learn to play a musical instrument."—*Bill Carola*

New Offer

Learning to Play Made Easy

FREE We now furnish with every instrument a **Free Scholarship Certificate.** This scholarship entitles you to free tuition in one of the foremost correspondence schools of music in the country. Whether you want to learn to play for profit or only for pleasure, this **Free Scholarship** will make it surprisingly easy for you.

Free Trial

You may have any Wurlitzer instrument for a week's free trial in your own home. No obligation to buy. Payments are arranged in small monthly sums, a few cents a day will pay for your instrument. Wurlitzer instruments are the result of 200 years' experience in musical instrument building. Famous for artistic quality, rich tone value and fine workmanship. Used in the finest bands and orchestras throughout the world.

Free Book

Illustrates and describes every known musical instrument—over 3000 articles. Special offers on complete outfits. Special prices direct to you. We also give you our Free Trial, Easy Payment Plan and special **Free Scholarship** Offer. No obligation.

Send Coupon Today

The Rudolph Wurlitzer Co., Dept. B177
117 E. 4th St., Cincinnati **329 So. Wabash Ave., Chicago**
120 W. 42nd St., New York **250 Stockton St., San Francisco**
Send me your Free Book on Musical Instruments. Also your Free Trial Easy Payment Plan and Free Scholarship offer. No obligation.

Name .....

Address .....

City ..... *State* .....

Instrument .....
(State instrument in which you are interested)

Copyright 1924, The Rudolph Wurlitzer Co.

Copyrighted material

The LARGEST RADIO STORES in AMERICA

Hook-ups!

All the latest and best Kits in our new

RADIO CATALOG

Just Out! Our new 1925 96-page Radio Catalog including all the best and latest Kits, Parts and Accessories. Write for your FREE copy today!

Save Money! Here's a typical bargain from our catalog—hundreds of others like this:

$47 LIST

PHILCO CHARGER and 96-Volt "B" BATTERY OUTFIT

Includes: 2 Philco Storage "B" Battery Units in mahogany case, of 48 volts each, Hydrometer, Panel Switch and Philco Charger, Brand new, fully guaranteed. Special Price... **$19.50**

Mail Orders Filled Promptly

CHICAGO SALVAGE STOCK STORES

Please Address Dept. PM 6

509 South State Street, CHICAGO, ILL.

Let us recommend the best books to study on any subject. Popular Mechanics Press, Chicago, Illinois.

TIGHTEN THAT LOOSE DRAWER HANDLE WITH SMOOTH-ON No. 1

Pack the Smooth-On around the bolt, washer and on the threads, and the handle can never again come loose. Try the same trick on any loose tool, knife, or umbrella handle, door knob, etc., and the result will surprise you.



SMOOTH-ON No. 1

is also sure cure for leaks of water, steam, fire, etc., at cracks or breaks in metal. Just the thing for repairing radiators, heating boilers, furnaces, tanks, pipes, leaky pails, etc. Keep a can on hand for emergencies, and write to us for a free copy of the Smooth-On Repair Booklet.

Write for FREE BOOK

Sold in 6-oz., 1-lb., or 5-lb. tins at all live supply stores.

SMOOTH-ON MFG. CO.
Dept. 37
574 Communipaw Ave., Jersey City, N. J.

AGENTS—$10.00 a Day Up

And just as much more as you want. Exclusive territories are now being allotted, so if you want to represent a good, fast, easy seller (it's going like wild fire), get a post card off to us right now and we will send you full information. Be the first in your territory to secure this valuable, exclusive, money-making agency. Many of our agents are making from $30 to $35 a day. Hurry your name for particulars before it is too late. SPAD Manufacturing Co., Dept. 100, 219 W. 40th St., New York, N. Y.

MAKE $100 A WEEK SELLING

Made To Measure Suit **$12.50**

FREE COMPLETE SELLING OUTFIT!
Earn $150 a week, regular line, or $75 a week, side line. Commission in advance. No delivery.

Outfit Worth $10 sent FREE

SUPERKLOTH RESISTS WATER SPARKS SNAGS

Most remarkable innovation in clothing industry. Quality union tailoring. Popular patterns. Outwear three ordinary suits. No competition. Sells on sight. Experience unnecessary.
ECONOMY CLOTHING MFG. CO., Dept. 28, 2035-49 Charleston St., Chicago

Also Free Sales Outfit on Famous Iron Kloth Boys Line

$2 Brings This Genuine DIAMOND RING

SIMPLY send $2.00 for the *most sensational, price-smashing diamond-ring offer ever made.*

A perfectly cut, guaranteed, blue white, fiery diamond is set in an 18 Karat white gold cup; ¾ Karat size. Latest design, hand engraved mounting.

10 DAYS' FREE TRIAL

We take all chances—if you are not satisfied at the end of ten days for any reason whatsoever, return the diamond ring to us and your deposit will be refunded to you. *Send only $2.00,* and receive this genuine steel blue white diamond ring exactly as illustrated; in a handsome gift box charges paid. A legal guarantee bond as to quality and value accompanies each ring. After ten days' trial pay balance $6.45 a month for twelve months. **Price only $79.50.**

NO RED TAPE—NO DELAY

Order Now! *This offer is limited. It may never appear again. Don't delay. Just send $2.00 as a deposit.* If you wish to return the diamond ring after trial, your deposit will be refunded.

FREE BOOK OF GEMS

Most complete Jewelry Catalog ever issued of Diamonds, Watches and Jewelry—*newest designs at lowest prices.*

A full year to pay on everything you order from our TWO MILLION DOLLAR STOCK.

Address Dept. 1389. *Est. 1895*

ROYAL DIAMOND & WATCH CO.
35 Maiden Lane - New York

Copyrighted material

$10 a Day Easily

New Ford Invention

Put on in 10 Minutes

Earn $10 a day and up, selling new invention for Fords. **Fills tank without lifting cushion.** Visible gauge shows gas supply. Retails under $5.

EXCLUSIVE TERRITORY—Selling direct or thru dealers. Build up your own big business. We deliver and collect for you—no capital tied up in stock. Write for territory.

A. J. KIRSTIN CO. 701 First Street Escanaba, Mich.

"FILLS TANK, GAUGES GAS, *without Lifting Cushion*"

FORDS: 60 Miles on one gallon of gas! It has been proven such mileage can be made. AIRLOCK guaranteed to increase gas mileage. Prevents radiator boiling in Summer, freezing in Winter. Positively Cools, Fuels, Decarbonizes Ford motor. Agents making big money distributing our products. AIRLOCK PRODUCTS, Box 703A, Willow Street, Long Beach, Calif.

Makes a Man Wish He Had Two Chins

Barbasol produces such a silky shave. And easy—well! No brush. No rub-in. Just the blade and Barbasol. You try it—three times—according to directions. 35c and 65c tubes.

The Barbasol Co. Indianapolis Ind.

Please mail me your Free Trial Tube of Barbasol.

Name.....

Address.....

.....

P. M. 7-25

For Modern Shaving

AGENTS BIG WINNER JUST OUT

New Invention — Marvelous Quickedge Knife and Shear Sharpener. Needed in every home. **Sells on Sight.** Sharpens any knife or shears **in ten seconds.** Just put knife in slot—turn crank—sharpens both sides at once. We want men and women hustlers in every county. **Profits start first day.**

$90 A WEEK

No experience necessary—200% Profit. This means $15 a day up to $7500 a year to agent who gets your county. J. C. Lewis of Kansas says: **"I have sold 100 sharpeners in four days."** Herbert Cain of Kentucky sold nine after supper. Wm. G. Hall of N. J. sold six in a half hour. **You can make this money. Write today. Territory free. Get busy at once.**

$2 Selling Price

QUICKEDGE SHARPENER CO.
197 Sharpener Building
JACKSON • MICHIGAN

One Man Saws 15 Cords a Day!

—Easy with the **OTTAWA** Log Saw! Wood selling for $3 a cord brings owner $45 a day. Use **4 H. P. Engine** for other work. Wheel mounted—easy to move. Saws faster than 10 men. Shipped from factory or nearest of 10 Branch houses. Write for **FREE Book**—"Wood Encyclopedia"—today.

OTTAWA MANUFACTURING CO.
1741-T Wood Street Ottawa, Kansas
Room 1741-T Magee Bldg., Pittsburgh, Pa.

TOSTWICH
THE GREATEST PROFIT-MAKER

The Tostwich brings amazingly big profit and sales wherever installed—a patented process—makes sandwiches taste 100% better than ever before. Full information without obligation to you—write today.

THE TOSTWICH CORPORATION
646 N. Michigan Ave., Chicago

$150 to $300 PROFIT MONTHLY FROM HB ONE DAY BATTERY CHARGING

Be independent! Own your own money-making battery charging business and add $150 to $300 every month to your income. **Thousands of HB owners** with no previous experience now own **the big battery service station of their city.** You can do it, too. **Only $35 cash brings a complete HB One Day Battery Charging Outfit, ready to use.** Your monthly profits **easily carry the small monthly payments. 30 days' free trial on money-back guarantee.** The best and lowest-priced complete outfit on the market. Write for free bulletin. Start your own money-making business.

HOBART BROS. CO. Box M7 TROY, OHIO

MORE HB ONE DAY BATTERY CHARGERS ARE IN USE THAN ANY OTHER MAKE

Copyrighted material

$1 Brings your Choice of these 3 Big Specials

Guaranteed 25% Saving

Simply pin a dollar bill to this ad, put it in an envelope with your name and address and **Mail It Today.** Your choice of these exceptional values will come Prepaid for a **15 Day Trial.** If you can duplicate your purchase for less money anywhere, send it back and your dollar will be returned. If satisfied pay $3.65 a month--**10 Months to Pay.**

$37.50 EACH

No Red Tape—No Delay
Transactions Confidential
Rush Your Dollar Today

A10 A11

A10 Beautifully hand-carved 18K White Gold Ladies Ring. 3 Genuine sparkling, blue-white Diamonds. **Price $37.50**
$1.00 Down; $3.65 a Month

A11 Rectangular style 14K Solid White Gold Wrist Watch set with 4 Genuine, brilliant, Blue-white Diamonds, 4 blue sapphires. Guaranteed 16 Jeweled Movement. **Price $37.50**
$1 Down; $3.65 a Month

A12 Gent's 12 size 17 jewel Guaranteed Elgin Watch, 14K Gold Filled Engraved Case guaranteed for 25 yrs. Complete with gold-filled Knife and Chain. **Price $37.50**
$1.00 Down; $3.65 a Month.

A12

FREE

A complete Booklet with over 3,000 other big bargains in Diamonds, Watches and Jewelry. **Send for it.**
10 Months to Pay on Everything.

AUTHORIZED CAPITAL $1,000,000.

L·W·SWEET INC.

65-M. 1660 BROADWAY, NEW YORK

Foot Pains go in 5 minutes if you wear FAIRYFOOT CUSHIONS. Must help or no pay. Write to FOOT REMEDY CO., 22nd St. & Millard Ave., Dept. 28, Chicago Ill.

Beautiful Complexion in 15 Days

Clear your complexion of pimples, blackheads, whiteheads, red spots, enlarged pores, oily skin and other blemishes. I can give you a complexion soft, rosy, clear, velvety beyond your fondest dream. *And I do it in a few days.* My method is different. No cosmetics, lotions, salves, soaps, ointments, plasters, bandages, masks, vapor sprays, massage, rollers, or other implements. No diet, no fasting. Nothing to take. Cannot injure the most delicate skin. *Send for my Free Booklet.* You are not obligated. *Send no money.* Just get the facts.

DOROTHY RAY, 646 N. Michigan Blvd., Suite 227, Chicago

THE WOTEN, GASOLINE ENGINE

2 CYCLE, 3-PORT

Aircooled and Watercooled. Nearly One-Half H. P. in five pounds. Handiest little engine ever made. Ideal wherever power is needed. Complete line of small gasoline and steam engines, dynamos, motors, batteries, battery chargers, etc. CATALOGUE FREE.

DYNAMIC MANUFACTURING CO.
First Nat'l Bank Bldg., Dept. 6 Chicago

$11,275.65 IN THREE MONTHS

SO REPORTS V. A. MARINI

of Santa Cruz, Cal., (Nov. 1924.) J. Gordon, of New Jersey, says **$4000 profit in two months.** Alexander, of Penn., **$3000 profit in four months.** Ira Shook, Flint, **$365.75 in one day.** Bram, bought one outfit, then 10 more within a year. Mrs. Lane, Pittsburg, sold **8000 packages in one day.** J. R. Bert, Ala., "only thing I ever bought that equaled advertisement." Pattillo, Ocala, writes: "Crispettes all you claim and then some." John W. Culp, South Carolina, writes, "Everything going lovely. Crispette wrappers flying all over. It's a good old world after all." Kellog $700 ahead end of second week. Mesner, of Baltimore, $250 in one day. Baker sold 3000 packages in one day. Perrin, $380 in 1 day.

WE'LL START YOU IN BUSINESS

Furnish secret formulas, raw material, and equipment. Very little capital required; no experience needed.

Build Paying Business of Your Own

No limit to the sale of Crispettes. Everybody likes them. It's a delicious food confection made with or without sugar. Write me for facts about a business that will make you independent. Start now, in your own town.

Profits $1,000 a Month Easily Possible

Send postal for illustrated book of facts. In contains enthusiastic letters from others—shows their places of business, tells how and when to start, and all information needed. Free. Write now!

LONG-EAKINS COMPANY
728 High Street Springfield, Ohio

EVEREADY
Radio Batteries
-they last longer

ULTRADYNE
MODEL L-2
Famous Superheterodyne

Write for interesting booklet on the famous Ultradyne.
Phenix Radio Corp.
114-E East 25th St., New York City

Static

"HOW TO KEEP STATIC OUT OF YOUR RADIO"

NEW COPYRIGHTED PLANS. $1.00

LEON LAMBERT
WICHITA, KANSAS

NO JOKE TO BE DEAF

—EVERY DEAF PERSON KNOWS THAT

I make myself hear, after being deaf for 25 years, with these Artificial Ear Drums. I wear them day and night. They stop head noises and ringing ears. They are perfectly comfortable. No one sees them. Write me and I will tell you a true story, how I got deaf and how I make you hear. Address

Medicated Ear Drum

GEO. P. WAY, Artificial Ear Drum Co. (Inc.)
80 Hoffman Bldg., 2539 Woodward, Detroit, Mich.

Copyrighted material

NAME YOUR OWN SALARY!

With Foley Saw Tools you can go into business for yourself and make more money than ever before. Charles Fuller, professional filer of Lima, Ohio, writes: "I have developed a wonderful and profitable business. Am getting saws from as far as West Virginia — 300 miles away. I get 50c per saw for filing and $1.25 for re-cutting new teeth. Rush my power drive machine." Hundreds of others are making big money with Foley inventions.

Write for free circular about Foley Saw Tools

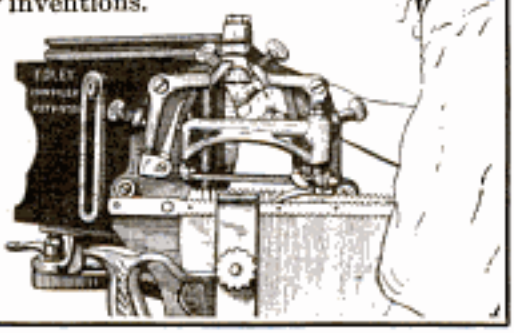

Foley Saw Tool Company
914 E. Lake St.
Minneapolis, Minn.

Smart Line for Smart Men to Sell

Salesmen are making real money selling my Unique and Original Printed Specialties: *Brilliant Blotters, Classic Let. Heads, DeLuxe Business Cards, Beauty Cards for Beauty Shops, etc.* Greatest line ever produced; customers everywhere. Send Twelve Two-cent stamps for *Handy Pocket Outfit* if you want quick action, but if you prefer the Missouri way send name-address and I will show you.
THOMAS MITCHELL, 132 North Robey St., CHICAGO

Why Not Solve Your Saw Problems With This Regular Tool?

You will like its sturdy mechanical construction. It will saw wood, fibre, bakelite 1" and metal ¼" thick. Sold also without motor. We carry a complete line of bench woodworking machinery. **For details write to**
DELTA SPECIALTY CO.
Dept. D, 858 Third St., Milwaukee, Wis.

Free Leatherette Carrying Case Free with Big 3 Foot Wonder Telescope, 5 sections. Brass bound. Powerful lenses. See people and objects miles away as if they were close. See moons and stars as never before. Useful and entertaining. "Could tell color of aeroplane 4 miles away."—Mrs. Yarbough. Order now.

"Watch my boy arrive at school 2 miles away."—Mrs. Horn. "Read numbers on freight cars mile away."—A. C. Palmer. "Saw a lighthouse 18 miles away."—Clyde Northner. "If I could not get another I would not take $10 for it."—A. R. Walker. "Can see across the Mississippi 3 miles and see people fishing."—M. L. Thorne. Thousands pleased.

Send No Money On arrival of Big 3 ft. Wonder Telescope with FREE Case and strap, deposit with postmaster only $1.85 plus few pennies postage. Satisfaction guaranteed or deposit returned. Order today.
FERRY & Co., Dept. B-177, 3224 N. Halsted St., Chicago.

Seal Rupture With a Quarter

Now you can throw away forever steel bands, chafing leg straps and other heavy makeshift devices. For a well known American scientist has found a new easy way to support rupture assisted by means of a wonderful little invention weighing less than 1-25 of an ounce. Not only do you do away with the objectionable pressure and tight strapping, but you eliminate the "coming down" of rupture—when running, straining, exercising, sneezing, etc.—which too frequently leads to strangulation. So great has been the success of this wonderful device that it is being offered to ruptured people on an absolute guarantee of instant satisfaction or no cost. Simply drop a postcard or letter requesting free literature to **New Science Institute, 2114 Clay St., Steubenville, O**

Save 52%
If You Act NOW
Guaranteed Used Burroughs Adding-Subtracting Machine

Completely overhauled—all worn parts replaced with brand-new Burroughs parts—fully guaranteed by the Burroughs Company for the same length of time as a new Burroughs machine.

Equipped with month and date section. Totaling capacity $999,999.99.

—Automatic direct subtraction by merely depressing lever

—Posts ledgers

—Writes customers' statements

—Will handle all your figure work

Hand operated $300. Electrically operated $375. Small down payment—easy terms.

MAIL THIS TODAY

General Adding Machine Exchange
6865 Second Blvd., Detroit, Michigan

Please send me information about this special guaranteed used Burroughs Adding-Subtracting Machine.

Name.....

Business.....

Address.....

Copyrighted material

THE CASE PROTECTS

THE SET SAVES TIME

Every man who works with tools should have a set of Genuine Irwin Auger bits in a handy Borcase.

The time saved by always having the right bit for the job in hand soon pays for a complete set of these finest wood-boring tools.

The case protects the bits from rust and chance blows.

Irwin Auger Bits are known the world over for their swift cutting, edge-holding qualities. They are the choice of master craftsmen everywhere. Ask your hardware dealer to show you Irwin Auger Bits in sets.

Most hardware dealers sell genuine Irwin Auger Bits in sets. If your hardware dealer does not, send us his name. In return, we will send you an interesting booklet on the use, care and selection of bits.

Irwin Home Set, 6 bits - - $3.50
Irwin Handy Set, 10 bits - $5.50
Irwin Carpenter Set, 13 bits - $7.25

THE IRWIN AUGER BIT CO.
Wilmington, Ohio

Hardware dealers everywhere sell genuine Irwin Auger Bits. The Irwin mark shown below is stamped on the shank of every Genuine Irwin Bit.

The IRWIN Bit
REG. U.S. PAT. OFF.

NOW—a world famous Remington on 5 DAYS FREE TRIAL

Write today for details of how you can now get a world famous rebuilt Remington by our new Free Trial and Easy-to-Pay Plan. It looks and writes like new. Our 45-year reputation and guarantee are your protection. Here is a real bargain—don't miss it.

AMERICAN WRITING MACHINE CO.
Dept. 601, Newark, N. J.

$71.25 PROFIT IN 45 MINUTES

Made by Le Roy Blades Without Experience

New mechanical wonder showed 38⅓% saving on gas in 14,000 mile test. Gives more power, speed, pep. Removes carbon. Easily attached. One free to introduce. Exclusive territory.

AIR-VAC CO., 6360 Broadway, CHICAGO

KING

Turn Your Spare Hours Into Real Money!

Haven't you often wished for a spare-time way of making money? Of all the various ways there is none more profitable and enjoyable than playing in a band or orchestra.

Clip and Mail Coupon

Get the particulars of our Easy Payment Plan that tells how you can pay while you play. *Free Trial*—We want you to try out a "KING" in your own home, without obligation and if you do not find the "KING" the very best instrument you ever played—return it.

Trade-in Proposition. Turn in the instrument you now own as part payment on a new "KING". Our latest catalogs show many new models and tell why "KINGS" are the finest instruments to learn on and play on. State the instrument you are interested in and send coupon.

The H. N. White Co., Cleveland
Manufacturers of "KING" Band Instruments

THE
H. N. WHITE CO.
5211-65 Superior Avenue
Cleveland, Ohio

Gentlemen: Please send me free your latest catalog on

_____(Instrument)

Name _____

Address _____

City _____ State _____

Copyrighted material

An Umbrella Tent De Luxe ~

Waterproof Mildew-Proof For Life

With or without Center Pole. Light—compact—erected in 5 minutes by one person. Buy direct from factory of largest tent manufacturers in world. Save 25%. Satisfaction guaranteed or money back.

25% Lower Prices

Perfect Ventilation

Rain-Proof Transom

No hot, stuffy tent when it rains

Send for Free Booklet of Vacation Equipment

U. S. TENT & AWNING CO.
731 No. Sangamon St., Chicago, Ill.

BIG MONEY

can be made by operating a branch radio factory. Can be started in your own home.
We furnish complete outfits and establish you in business. Knowledge of radio helpful, but not necessary as we teach you. This revolutionary five tube set retails for $35.00 and equals sets selling at much higher prices. Free sample if you qualify. Write or wire, naming your county for exclusive proposition.

ROYAL MFG. CO.

Dept. M, 206 Broadway, N. Y.

The De Luxe The Machine That Cheats the Printer

This Machine pays for itself over and over each year. It prints the Merchant's "ad" automatically on Roll wrapping paper in one or two colors as you pull the paper. *Simple* in construction, an ornament to any counter. Guaranteed for five years. Thousands already sold. Retail price $12.50. Big profits to **Exclusive Distributors** who are financially responsible and are looking for a **Real, Live, Up to the Minute Proposition.**

Woodworkers Mfg. Co., Racine Ave. & Cortland St., **Chicago**

Chlorine Gas

Summer colds, bronchitis, influenza, whooping cough and other dangerous respiratory infections yield quickly to Chlorine Gas. Prevents as well as cures. The Chlorinator—just out—is the new and successful home or individual machine to give Chlorine Gas. Approved by Chemical Warfare Service of U. S. Army. Some open territory for salesmen. Write today.

HUBERT MYERS LABORATORIES, TOLEDO, OHIO or SAN FRANCISCO, CALIF.

BOW LEGS?

OUR GARTER (Pat'd)

Makes Trousers Hang Straight

If Legs Bend In or Out. Self Adjustable.
Free Booklet — Plain Sealed Envelope

The T. GARTER CO. Dept. 2, New London, New Hampshire

Como Duplex Transformers "The World's Standard Push-Pull Transformer"

Maximum Volume without Distortion

Price $12.50 per pair At All Leading Dealers

COMO APPARATUS CORP., Manchester, New Hampshire

Write for free catalog illustrating and describing our complete line of 1500 Good Tools.

GOODELL-PRATT COMPANY
Toolsmiths
Greenfield, Mass., U. S. A.

RADIO LATEST CATALOG OF NEWEST PARTS AND KITS **FREE**

Fresh from the press. Shows all the newest standard parts and kits at big savings. Most complete line in America.

Send name and address, also name of friend. Send at once.

BARAWIK COMPANY, 34 S. Clinton Street CHICAGO, ILL.

And again the alibi failed

LATE again! For the third time this week she has had to keep dinner hot so long that it isn't fit to eat. And while he really was working, he has a hopeless feeling that the alibi isn't going over.

Even a box of candy won't convince her that there is any reason why he should be the *only* man to work overtime.

* * * *

Some day they are going to wake up to the fact that a Corona at home would enable him to leave the office on time and finish up his work after dinner. The newest Corona has the same keyboard as the big machines in his office.

Corona Four costs only $60. Easy terms if desired. Look for Corona in your phone book or write Corona Typewriter Co., Inc., 108 Main St., Groton, N. Y.

CORONA

STANDARD KEYBOARD

Copyrighted material

LUMINOUS PAINT

Make Your Watches, Clocks, Etc., Visible by Night

The very latest discovery in the scientific world. Hitherto, practically unobtainable except at an exorbitant price, we have at last succeeded in producing this remarkable LUMINOUS PAINT, which, applied to the surface of any article, **emits rays of white light, rendering it perfectly visible** in the dark. **THE DARKER THE NIGHT, THE MORE BRILLIANT IT SHINES.** Quite simple to use. Anyone—you can do it. A little applied to the dial of your watch or clock will enable you to tell the time by night. You can paint the push buttons or switch plates of your electric lights, match boxes, and innumerable other articles; make your own Luminous Crucifixes, Luminous Rosaries, etc. Small bottle, **price 25c.** Larger sizes, **50c** and **$1** postpaid. **JOHNSON SMITH & CO. Dept. 396, RACINE, WIS.**

Serpent's Eggs

Box contains 12 eggs. When lit with a match, each one gradually hatches itself into a snake several feet long, which curls and twists about in a most life-like manner.

Price per box, 10c postpaid, 3 for 25c.

CIGARETTE MAKER

Roll your own and save money. Makes them better and quicker besides saving more than half. Use your favorite brand of tobacco. Neat, useful and handy. Pocket size, weighs ¾ oz. Made entirely of metal, nickelplated. **Price 25c postpaid.**

MIDGET BIBLE

GREAT CURIOSITY Smallest Bible in the World. Size of a postage stamp, **200 Pages.** Said to bring good luck to the owner. A genuine work of art. Must be seen to be appreciated. Make good money selling them to friends, church acquaintances, etc. **PRICE 15c** each, **3** for **40c, 12** for **$1.35, 100** for **$7.50.** Also obtainable in Leather Binding, with gold edges, **Price 50c each, 3 for $1.25, $4.50 per doz. Magnifying Glass** for use with Midget Bible, **15c.**

STAGE MONEY

With a bunch of these bills, it is easy for each person of limited means to appear prosperous by flashing a roll of these bills at the proper time and peeling off a genuine bill or two from the outside of the roll, the effect created will be found to be all that can be desired. **Prices, postpaid: 40 Bills 20c, 125 for 50c, or $3.50 thousand postpaid.**

Wonderful X-Ray Tube

A wonderful little instrument producing optical illusions both surprising and startling. With it you can see what is apparently the bones of your fingers, the lead in a lead pencil, the interior opening in a pipe stem, and many other similar illusions. A mystery that no one has been able to satisfactorily explain. **Price 10c, 3 for 25c, 1 doz. 75c. Johnson Smith & Co.**

Good Luck Ring

Quaint and Novel Design

A VERY striking and uncommon ring. Silver finish, skull and crossbone design, with two brilliant, flashing gems sparkling out of the eyes. Said by many to bring Good Luck to the wearer, hence its name, **Good Luck Ring.** Very unique ring that you will take a pride in wearing. **ONLY 25 CENTS.**

Exploding Cigarettes

JUST LIKE ORDINARY CIGARETTES, BUT SUCH REAL STARTLERS! The box contains ten genuine cigarettes of excellent quality. They appear so real, but when each cigarette is about one-third smoked, the victim gets a very great surprise as it goes off with a loud **BANG!** A great mirth provoker yet entirely harmless. **Price 25c per box.**

Popular Watch Charms



15c

ONLY

2 for 40c; $1.35 doz

Very pretty little curiosities and decidedly novel. Fitted with Magnifying Lenses that enlarge the pictures to a very surprising degree; in fact, it seems almost incredible that a clear picture could be possible in such a small compass, and how sharp and distinct they show up when you look through. Come in assorted views—Actresses, views of Panama Canal, Lord's Prayer in type, etc.

Mystic Skeleton

A jointed figure of a skeleton 14 in. in height, will dance to music and perform various gyrations and movements while the operator may be some distance from it.

10c pd.

NEW BOOK ON ROPE SPLICING

Useful Knots, Hitches, Splices, etc.

A most practical handbook giving complete and simple directions for making all the most useful knots, hitches, rigging, splices, etc. Over 100 illustrations. All about wire rope attachments, lashing, blocks, tackles, etc. 27 Heraldic Knots illustrated. Of great value to mechanics, riggers, campers, boatmen. **Price 20c ppd.**

MAGIC FLUTE

Wonderfully Sweet Toned and Musical

Post Paid 25c

The Magic Flute, or Harmonette, is a unique and novel musical instrument that is played with nose and mouth combined. There is just a little knack in playing it which, when once acquired after a little practice will enable you to produce very sweet music that somewhat resembles a flute. There is no fingering, and once you have mastered it you can play all kinds of music with facility and ease. When played as an accompaniment to a piano or any other musical instrument, the effect is as charming as it is surprising.

BLANK CARTRIDGE PISTOL

Protection against Burglars, Tramps & Dogs

Price $1.00 Postpaid

Well made and effective; modelled on latest type of Revolver; appearance alone is enough to scare a burglar. When loaded it may be as effective as a real revolver without danger to life. It takes standard .22 Cal. Blank Cartridges obtainable everywhere. **Price $1.00 postpaid. Blank Cartridges,** by express, **50c** per **100. Holster** (Cowboy type) for Blank Cartridge Pistol, **50c,** postpaid.

Johnson Smith & Co., Dept. 396, Racine, Wis.

BOYS! BOYS! BOYS!

THROW YOUR VOICE

Into a trunk, under the bed or anywhere. Lots of fun fooling the teacher, policeman or friends.

THE VENTRILO

a little instrument, fits in the mouth out of sight, used with above for Bird Calls, etc. Anyone can use it.

Never Fails. A 32 page book on ventriloquism, the Ventrillo, ALL FOR 10 CENTS

K.K.K

Everything about the **Ku Klux Klan** told in a clear, fearless manner. Book tells all—How it started and was oppressed in 1871—The New Ku Klux Kan—How Organized—How Members are Enrolled—Oath of the Klan—**Questions for Candidates**—Creed—Objects of the Order—Obedience—Fidelity—Pledge of Loyalty—**Ku Klux Klan and the Masons**—The Jews—The Masons—Real K. of C. Oath—The Negro Ku Klux Klan, etc., etc. Latest and most complete book on the Klan published. **Price 25c, Postpaid.**

Stamps or Coin

LOOK 35¢ Look

Wonderful Instrument. Greatest thing yet. Nine separate articles in one. Everybody delighted with it. Odd, curious and interesting. Lots of pleasure as well as very useful. It is a double Microscope for examining the wonders of nature. It is also an Opera Glass, a Stereoscope, a Burning Lens, a Reading Glass, a Telescope, a Compass, a Pocket Mirror, and a Laryngascope—for examining eye, ear, nose and throat. It is worth all the cost to locate even one painful cinder in the eye. Folds flat and fits the pocket. Something great—you need one. Don't miss it. Sent by mail, postpaid.

Only 35c or 3 for $1.00

25 Cents BABY TANK

Goes backward or forward by its own power. Nothing to wind. What makes it go is a mystery. It crawls along, overcoming obstacles just like the larger Tanks. Perfect scholar of most amazing "stunts." Runs ten times longer than most mechanical toys. Handsomely finished and enameled in natural colors. **25c postpaid.**

Female SEX Indicator 25c Male

Sex Indicater

Hold the **MAGIC INDICATOR** over a man's hand—instantly it moves in a straight line, backward and forward. Hold it over a woman's hand and it describes a complete and continuous circle. The same action can be obtained over a letter written by a man or woman, etc. It is fascinating; baffling. We have never been able to figure out how it's done—but we've never seen it fail. Many novel and entertaining tests may be performed with the Sex Indicater. For example, similar results can be obtained with animals, cats, dogs, rabbits, ever birds, chickens, canaries, etc. Also used to predetermine the sex of chickens and birds, etc., in fact it would as a patented sex tester in Kansas. **Price 25c, or 3 for 65c. ppd.**

JOHNSON SMITH & CO., Dept. 396, RACINE, WIS.

Address orders for all goods on this page to

JOHNSON SMITH & CO.

Dept. 396 RACINE, WIS.

A DeLuxe Edition of our new 1925 CATALOG mailed on receipt of 25c. Handsome cloth binding. Only book of its kind. 420 pages of all the latest tricks in magic, the newest novelties, puzzles, games, sporting goods, interesting books, curiosities in seeds and plants, etc., unprocurable elsewhere.

Copyrighted material

SOUTH BEND Quality LATHES $197 UP

Lead the World in Lathe Value

Here's the Reason

We manufacture nothing but South Bend Lathes and use special production machines to insure accuracy and interchangeable parts. This quantity production reduces our costs and we pass the saving on to the customer in our low prices.

Bench Lathe, 9-inch Swing over Bed, 2½ ft. Bed. Price $197. Easy payments if desired.

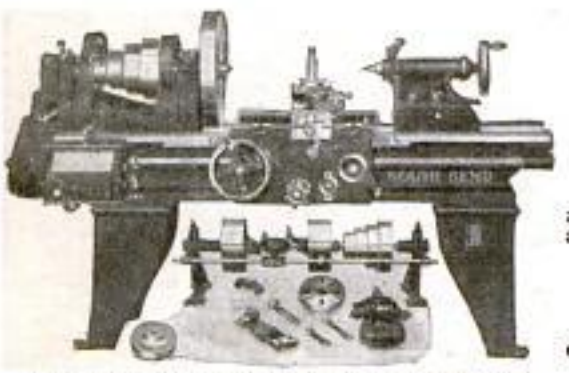

18 in. Swing over Bed, 10 ft. Bed Quick Change Gear, Price $721.00. Easy payments if desired.

Prices of Popular Sizes

	Quick Change Gear Lathes	Standard Change Gear Lathes
9" x 3' Lathe	$241.00	$211.00
11" x 4' "	288.00	248.00
13" x 6' "	366.00	316.00
15" x 7' "	447.00	392.00
16" x 8' "	498.00	438.00
18" x 10' "	721.00	656.00

Prices of Direct Motor Driven Lathes, Tool Room Lathes, and Special Lathe Attachments for the manufacturing plant, tool room and machine shop will be furnished on request.

Write for Catalog No. 84

Easy Payments if Desired

All South Bend Lathe Dealers are in position to extend the convenience of Easy Payments. Ask about it.

SOUTH BEND LATHE WORKS

802 EAST MADISON STREET SOUTH BEND, IND.

Interlox MASTER SLIDE RULE

Takes accurate inside or outside measurements

Works fast. Slides in and out quickly. Durably made of brass trimmed boxwood. Any length 2 to 8 feet, 20 cents per lineal foot. If not at dealer's, sent postpaid.

MASTER RULE MFG. CO., 841-43 E. 136th St., New York

Dealers and Agents: request attractive proposition

Buchstein's Fibre Limb

is soothing to your stump—strong, cool, neat, light. Easy payments. Braces for all deformities.

Send for Catalog Today

D. BUCHSTEIN CO.

610 3rd Ave., So., MINNEAPOLIS, MINN.

Learn Electricity

by practical, personal training in the great shops of **COYNE**

You don't need education or experience. COYNE-trained men earn

$60 to $200 a Week

COMPLETE ELECTRICAL TRAINING in Twelve Happy Weeks

Free Railroad Fare Get my special offer of free fare to Chicago, also FREE courses in Radio and Auto Truck and Tractor Electricity. Ask for Big, Handsome FREE BOOK containing 151 actual photos of electrical methods and operations in Big Shops.

COYNE ELECTRICAL SCHOOL

Dept. B-935, 1300 West Harrison Street, CHICAGO, ILLINOIS

Nestler Rubber Fusing Stations

Exclusive territories now being assigned

ONE man wanted in each community to open Nestler Rubber Fusing Station. Exclusive license granted for community to repair and retread tires by world-famous Nestler Rubber Fusing Process. Big demand for Nestlerizing. Big Profits to Nestler Operators. Moderate capital. Previous experience in this field unnecessary. We teach our operators FREE. Write TODAY for book giving facts. Don't delay. Territories going fast.

NESTLER RUBBER FUSING CO., Inc.

Dept. 62, 245 W. 55th St., New York City

"Red Devil" Giant Grip No. 444—A Tool Kit in Itself

Combines a powerful plier and husky wrench—takes the place of pliers, pipe wrench, monkey wrench, socket wrench, etc. Changes from a plier to a wrench instantly—can't slip. Handles round, square or hexagon-shaped objects and holds on like a vise. Ask your hardware dealer for "Red Devil" Giant Grip No. 444, size 7½ inches. If not in stock, send his name and $1.00 (add 25 cents for postage) and we will supply you.

Mechanics' Handy Booklet Free.

SMITH & HEMENWAY CO., Inc. Mfrs. of "Red Devil" Tools 122 Colt St., Irvington, N. J.

Copyrighted material

Swinging, Swaying Tantalizing Tunes

The lure of jazz is yours with a Buescher True-Tone Saxophone. Young folks are enamored by these tantalizing tunes. They love that syncopation.

If you want to be popular—if you want to be admired—favored, get this wonderful instrument. At home, at parties, everywhere, the Saxophone player is the center of attraction.

BUESCHER

TRUE-TONE Saxophone Easy to Play Easy to Pay

You don't have to "study" the Saxophone as you do other instruments. There is no practice drudgery. You don't have to be "talented." Three lessons sent free with the instrument start you. In a week you can play popular airs. No teacher needed.

It's all fun, and even though you're only out for pleasure now, you can, in 90 days' time, if you wish, join a band or orchestra.

First class Saxophonists make big money. Try it out free for six days in your own home.

Free Saxophone Book

Send the coupon! Or a postal for full particulars and copy of Saxophone Book! Mention any other instrument in which you may be interested. No obligation. Do this today. (112)

BUESCHER BAND INSTRUMENT CO.
Everything in Band and Orchestra Instruments
914 Buescher Block Elkhart, Ind.

Buescher Band Instrument Co.,
914 Buescher Block, Elkhart, Ind.
Gentlemen: I am interested in the instrument checked below:

Saxophone..... Cornet..... Trombone..... Trumpet.....
(Mention any other instrument interested in)

Name.....

St. Address.....

Town..... State.....

ADDING MACHINE VEST POCKET SIZE

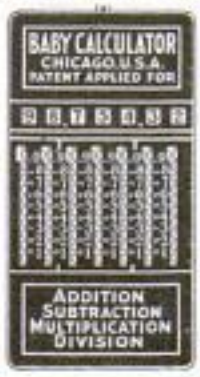

Does Work of $100 Machine.
Guaranteed for 5 years. Not a toy.
Anyone can operate it. Will not make mistakes. Let this machine do your figuring. First cost is last cost. Everybody needs one for figuring.

ADD
SUBTRACT
MULTIPLY
DIVIDE

$2.50 Total Cost

FREE TRIAL — Send No Money. Just write "Send me a Baby Calculator" and give your name and address. We will ship it immediately, all charges prepaid. On delivery pay postman $2.50. You can return it after 10-day trial for full refund if the Baby Calculator is not the greatest time and labor saver you ever used.
This is the lowest priced practical calculating machine made. Order today.

BABY CALCULATOR SALES CO.
P. O. Box 1118, Dept. 93, Chicago, Ill.

AGENTS Every business firm, man or woman, will buy the Baby Calculator on sight. Big Commission.

The New Sypher

is lathe value plus—more for the money than ever built before. Length over all, 30 in. Between centers, 14 in. Swing over bed, 7¾ in., includes counter shaft. Bronze taper bearings. Weight 60 pounds. Absolutely accurate. A real job. *Write today for circular.*

$60

The Sypher Mfg. Co. Dept. D Toledo, Ohio

GOVERNORS
FOR GAS AND AUTO ENGINES
CANDEE-SMITH GOVERNOR CO., SPRINGVILLE, N. Y.

"Been on a vacation Bill?"

"No, Jim — I've stopped smoking. Gained six pounds in a week. You know how I used to smoke—a package of cigarettes and a cigar or two a day—it sure had some hold on me. But I'm cured—took a scientific home tobacco treatment—fixed me up in two weeks.

"Wasn't hard on me at all—noticed improvement the first day—I feel like a new man. It didn't interfere with my work—didn't leave any druggish after-effects—the money I saved in the last two weeks has paid for the treatment alone.

"Why don't you take it? It has cured men like you and me for over forty years—it is a doctor's individual prescription that sure fixes you up. Just send the coupon for full information NOW. No obligation. All correspondence is strictly confidential."

The Keeley Institute, Dwight, Ill.

Please send me, without any obligation on my part, your free booklet which will tell me how to rid myself of the tobacco habit.

Name.....

Town.....

Street..... State..... PM-7

Copyrighted material

At the Seashore One Summer—In the Mountains the Next!

You Can Take It Anywhere Because It Is Thoroughly Portable

Bossert "RADIO" Bungalow

This is the greatest value in Bungalows ever offered. Delivered to you complete, can be easily erected by two men within a day and a half. No skilled help necessary. Can be taken down quickly, transported and put up again without trouble. Sturdily built, will last for years.

ONLY

$615

F. O. B. Brooklyn

Living Room, 12 ft. x 12 ft.; two bedrooms, 9 ft. x 9 ft.; kitchen, 6 ft. x 9 ft. and bath. Perfect room arrangement, light and airy.

RIGHT NOW send for order form and free folder completely describing this greatest of bungalow values. ***Houses in stock, ready for immediate shipment.***

Bossert "RADIO" Garage

This handsomely designed garage comes sectional-built, 12 ft. x 18 ft. inside measurement. Strongly constructed. An attractive addition to any home or estate. Can be erected by unskilled labor in 8 or 10 hours. Carried in stock for immediate shipment. ***Write at once for free descriptive folder.***

ONLY

$295

F. O. B. BKLYN.

LOUIS BOSSERT & SONS, Inc.

Largest Lumber Plant in the East

1371 Grand St., (House Dept.) BROOKLYN, N.Y.

play a Conn SAXOPHONE

This Free Book tells about exclusive features which make the Conn easiest of all wind instruments to play. Send now for your copy and details of Free Trial; Easy Payments on any Conn instrument for band or orchestra.

C. G. CONN, Ltd.
731 Conn Bldg., Elkhart, Ind.

CONN BAND INSTRUMENTS

Creighton Hale, famous movie star and accomplished saxophonist uses a Conn, as do most prominent stars

1,000 Men Wanted

these new comforts in a shaving cream

...now please accept a 10-day tube Free

GENTLEMEN:

In Palmolive Shaving Cream there is a unique story.

Some years ago we set out to create the ideal Shaving Cream.

First we asked 1,000 average men to tell us what they most desired.

Then, step by step—by making and testing 130 separate formulas—we met these desires to the utmost.

The result is a new attainment, better in at least 5 ways than any shaving cream you know.

Men have welcomed it — millions have changed from old-type shaving creams . . . So will you when you know.

The results men wanted

Abundant lather. Palmolive Shaving Cream multiplies itself in lather 250 times.

Quick action. It softens the beard in one minute.

Lasting lather. It maintains its creamy fullness for ten minutes on the face.

A clean shave. The extra strong bubbles hold the hairs erect for cutting, so they don't lie down.

No irritation. The palm and olive oil content leaves the face in fine condition.

Let this test prove that we have secured these wanted effects. Do this in fairness to yourself and us. Clip coupon now.

To add the final touch to shaving luxury, we have created Palmolive After Shaving Talc — especially for men. Doesn't show. Leaves the skin smooth and fresh, and gives that well-groomed look. Try the sample we are sending free with the tube of Shaving Cream. There are new delights here for every man who shaves. Please let us prove them to you.

THE PALMOLIVE COMPANY (Del. Corp.), Chicago, Ill.

PALMOLIVE SHAVING CREAM

2863

10 SHAVES FREE and a can of Palmolive After Shaving Talc

Simply insert your name and address and mail to Dept. B-1024, The Palmolive Company (Del. Corp.), 3702 Iron Street, Chicago, Ill.

Residents of Wisconsin should address The Palmolive Company (Wis. Corp.), Milwaukee, Wis.

.....

.....

Copyrighted material

In one of the most daring aerial exploits ever attempted—Sgt. Bose recently dropped 1800 feet through space before opening his parachute.

From a record-breaking Parachute Jumper

—an unusual tribute to Keds!

SURE footwork! Tremendously important in every athletic sport—but even more so when walking on the wings of an airplane three or four miles up in the air!

That's why the following letter from Sgt. Randle Bose—who two years ago broke the world's altitude record for a parachute jump—is a remarkable tribute to Keds.

"I FIND that Keds are better for aerial wing walking and parachute jumping than any other shoes I have worn, due to the fact that they will not slide from underneath you while climbing about on the wings of an airplane. Not only are Keds remarkable for their strong ground-grip, but they are at the same time unusually light and a great support to your ankles. In short, Keds are absolutely the best shoes I have ever worn when making parachute jumps."

AN unusual tribute! And when you combine this remarkable ground-grip with such amazing wearing quality as Keds have—it is easy to see why Keds are the standard sport shoes today.

But remember—Keds are made *only* by the United States Rubber Company—and the name Keds is put on every shoe. Look for the name!

Our Keds Hand-book of Sports contains information on games, sports, camping and dozens of other interesting subjects. Sent free if you address Dept. 470—1790 Broadway, New York City.

United States Rubber Company

A sturdy athletic-trim Keds model—built for the hardest sports and vacation wear. Athletic-trims come in lace-to-instep as well as lace-to-toe styles.

They are not Keds unless the name Keds is on the shoe

Copyrighted material

Build this phenomenal new radio *in 45 minutes*

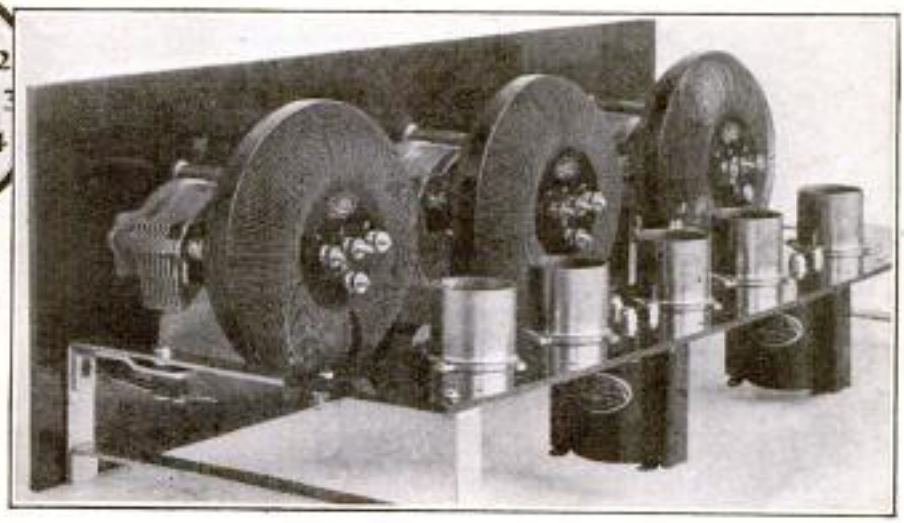

The revolutionary Erla Circloid-Five Factory Bilt Kit—as you receive it.

Price $49.50

This new type kit is factory assembled. Ready cut, flexible, solderless leads make it ridiculously easy to wire. Amazing new inductance principle brings results hardly thought possible. Send for book, *Better Radio Reception*

NOW anyone can build the finest of receivers in only a few minutes. No more wire bending or soldering. Merely attach a few ready cut, flexible eyeletted leads and the job is done. The finished set is unsurpassed even by the costliest factory-built receiver.

But most amazing is the new inductance principle incorporated in this last word in kits—called the Erla Circloid principle of amplification.

Four vital improvements result from this great discovery, which are not found in ordinary sets.

1. ***Greater Distance:*** Erla * Balloon * Circloids have no external field, consequently do not affect adjacent coils or wiring circuits. This enables concentration of proportionately higher amplification in each stage, with materially increased sensitivity and range.

2. ***More Volume:*** Increased radio frequency amplification made possible by Erla Balloon Circloids gives concert volume to distant signals inaudible with receivers of conventional type.

3. ***Increased Selectivity:*** Erla Balloon Circloids have no pick-up quality of their own. Hence only signals flowing in the antenna circuit are amplified. Static is greatly reduced for this reason.

4. ***Improved Tone Quality:*** The self-enclosed field of Erla Balloon Circloids eliminates stray feedbacks between coils and consequently does away with mushing of signals and distortion. Tone is crystal clear and perfectly lifelike.

Write for free information on kit—also book

See how 45 minutes of fun will give you the newest and most nearly perfected set known to radio science. Easy as A-B-C to finish. Examine it at any Erla dealer's, or send the coupon for full information, illustrations and diagrams *free*. Also ask for remarkable new book, "Better Radio Reception," describing the sensational new Circloid principle. Enclose 10c for mailing and postage on book.

ELECTRICAL RESEARCH LABORATORIES
2518 Cottage Grove Ave., Chicago

** Trade Mark Registered.*

Dealers *Exclusive franchises are available to high class dealers in localities still open. Write or wire immediately.*

ELECTRICAL RESEARCH LABORATORIES,
2518 Cottage Grove Ave.,
Chicago, U. S. A.

☐ Send me free information on kit.
☐ Enclose 10c for postage for book "Better Radio Reception."

ERLA

This sign identifies authorized Erla distributors. All are equipped to give complete radio service.

Name.....

Address.....

City..... State.....

Copyrighted material

How to Finish Home-Made Furniture

If you have a hobby for making cabinets, furniture, porch swings, radio boxes, etc., you will find our book on Wood Finishing invaluable. Naturally, you want to give your handiwork a beautiful finish. Our Book gives complete instructions. It tells how to stain wood artistically—how to remove old paint and varnish—how to secure a beautiful enamel finish.

FREE—This 25c Book on Wood Finishing

This Book gives complete instructions for finishing all wood—hard or soft, old or new. Explains just what materials to use and how to apply them. This book is the work of experts—illustrated in color. Contains a hundred wood finishing hints.

Tells how inexpensive soft woods may be finished so they are as beautiful and artistic as hardwood. Includes color charts—gives covering capacities, etc. Contains practical suggestions on making your home artistic, cheery and inviting.

Johnson's Wood Dye

(Penetrating)

S. C. JOHNSON & SON, Dept. P.A.7, RACINE, WIS.
"The Wood Finishing Authorities"
(Canadian Factory—Brantford)

Please send me free your 25c Instruction Book on Home Beautifying and Wood Finishing. I enclose 10c to cover postage and wrapping.

MY DEALER IS .....

My Name .....

Address .....

City and State .....

Johnson's Wood Dye is for the artistic coloring of all wood. It is very easy to apply—dries in four hours and will not rub off or smudge—penetrates deeply, bringing out the beauty of the grain. Made in 17 beautiful shades, among the most popular of which are:

123—Dark Oak	*131—Walnut*
129—Dark Mahogany	*126—Light Oak*
127—Brown Mahogany	*124—Golden Oak*

Order Johnson's Wood Dye from your dealer by name and number.

S. C. JOHNSON & SON, RACINE, WIS.
"The Wood Finishing Authorities"

Copyrighted material

YALE-HARVARD BOAT RACE — NEW LONDON

SUCH POPULARITY MUST BE DESERVED

A brilliant race and a colorful crowd to cheer its favorites on! Much less spectacular perhaps is Chesterfield's race for sales, but smokers from coast to coast are backing it by the million.

Copyrighted material

Sweeney Graduates Make Big Money!

You can do it, too

There Are Thousands of Big Money Making Opportunities for the Sweeney Trained Man

For fifteen years I have been training men by the Sweeney System—a method of practical training by tools instead of books. $200,000 worth of equipment; $50,000 Radio Station WHB. You don't need experience or education. But you've got to work in overalls and with greasy, grimy hands. Will you do that? I teach you by actual work, everything about automobiles, tractors, oxy-acetylene welding, vulcanizing, radio, electrical work. You get all this at this Great Trade School, the Million Dollar Sweeney School and you get it nowhere else. **I save you both time and money.**

MEN WANTED

If you are just a day dreamer you will read this ad and forget to answer it. If you are that kind you will NEVER SUCCEED AT ANYTHING. But if you have JUST ENOUGH determination to better yourself to clip the coupon or send a postcard and do it now, I will make you a SURPRISING OFFER. This offer may be the turning point in your life. I dare you to investigate.

Send-this now

EMORY J. SWEENEY, President
Dept. 731 , Sweeney Bldg., Kansas City, Mo.
Send me free your 64-page Catalog and full particulars of your $125.00 offer.

Name.....

P. O. .....

State..... Age.....

My Amazing Offer

Never before have I ever made such an offer. I want you to write me quick. You won't need to wait any longer. I now make it possible for you to come to this Million Dollar School right now. I further guarantee you the same expert practical instruction under skilled instructors that has made the Sweeney School World Famous.

FREE

Just send me your name and I will send you my 64-page big illustrated book. I have put into this fascinating book a lifetime of mechanical experience. It is full of real pictures—shows how mechanics do all kinds of expert jobs. Lists the opportunities in the business. Tells just what to do—where to go—to make good. Explains step by step how to learn to be a skilled mechanic. Answers every question. Many a mother and father reading this book have been inspired to make sacrifices and help their sons out. Tells all about the world famous Sweeney System—adopted by U. S. GOVT. during the war to intensively train soldier motor mechanics. Shows how easy it will be for you to FIT YOURSELF for a real job, independence and prosperity. I will send this to you free—no cost—no obligation. Write for it today. No colored students accepted. Answer this NOW!

E. J. SWEENEY, President

LEARN A TRADE—

Sweeney

AUTOMOTIVE & ELECTRICAL SCHOOL
731 SWEENEY BLDG., KANSAS CITY, MO

Digitized by Google